



バタフライバルブ BFV-121

Http://www.ytk-group.co.jp





仕様

- バタフライバルブ
- 使用圧力：クラス 150
- 本体材質：WCB/SS304/SS316
- シート：TFM1600/RTFE/PTFE
- ステム：SS304/SS316/17-4PH
- 呼び径：2"~24"(DN50-DN600)
- ジスク：SS304/SS316

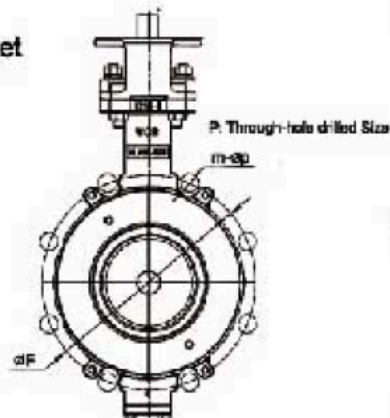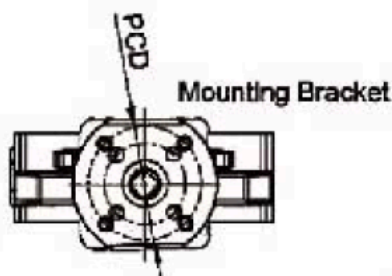

Wafer Body Style

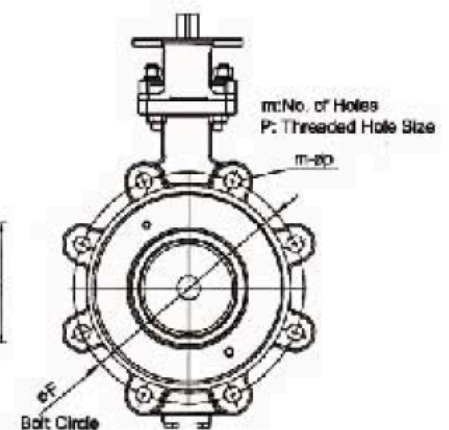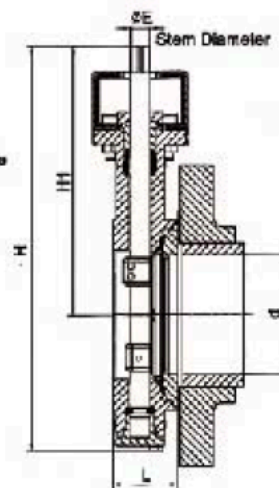

Lugged Body Style

寸法表

UNIT:MM

DN	INCH	d	L	H	H1	øE	ISO 5211	øF	M-øF	
									WAFER	LUG
DN50	2"	58	44	265	186	11	F05/F07	120.7	4-¾	4-¾
DN65	2-½"	62	46.5	268	186	11	F05/F07	139.7	4-¾	4-¾
DN80	3"	75	47.8	295	205	11	F05/F07	152.4	4-¾	4-¾
DN100	4"	100	54.1	347	233	14	F05/F07	190.5	8-¾	8-¾
DN125	5"	118	56.5	373	242	14	F05/F07	215.9	8-¾	8-¾
DN150	6"	150	56.5	418	261	17	F07/F10	241.3	8-¾	8-¾
DN200	8"	198	61.3	472	301	17	F07/F10	298.5	8-¾	8-¾
DN250	10"	246	69.5	540	329	22	F07/F10	362	12-1	12-¾
DN300	12"	296	79	623	370	27	F10/F12	431.8	12-1	12-¾
DN350	14"	336	92	738	428	27	F12/F14	476.3	12-1½	12-1
DN400	16"	387	101.8	783	453	36	F14/F16	539.8	16-1½	16-1
DN450	18"	438	114	877	527	36	F14/F16	577.9	16-1½	16-1½
DN500	20"	489	127	948	558	46	F14/F16	635	20-1½	20-1½
DN600	24"	565	154	1110	660	46	F16/F25	749.3	20-1¾	20-1¼