

NEW-FLOW

**ISO 9001
REGISTERED**

NEW-FLOW

MANUFACTURE OF ACRYLIC PLASTIC FLOW METER
FAC SERIES
AND CONTROL INSTRUMENTS

Instruction Manual



Approvals:



FAC

NEW-FLOW TECHNOLOGIES, INC.

No.9 Lane 133, Xing-Hua St., Chien Chen Dist., Kaohsiung 806, Taiwan
TEL: 886-7-8135500 FAX: 886-7-8225588 / 8159758
Email: info@new-flow.com www.new-flow.com

INSTALLATION

Instructions Manul

Service: Gases & liquids

Wetted parts material: Body—Acrylic plastic
O—ring—NBR(standard), Viton on request
Float—SS316, brass

Valve material: SS316, brass available

Connecting material: SS316, brass available

Temperature & pressure limits: 150 psig(10bar)@100°F(38°C)


Temperature limit: 0°C~54°C

Accuracy: 3% full scale


Mounting: Vertical position

Weight: 15.85~17.60 kg (0.45~0.5 kg)

Dimensions

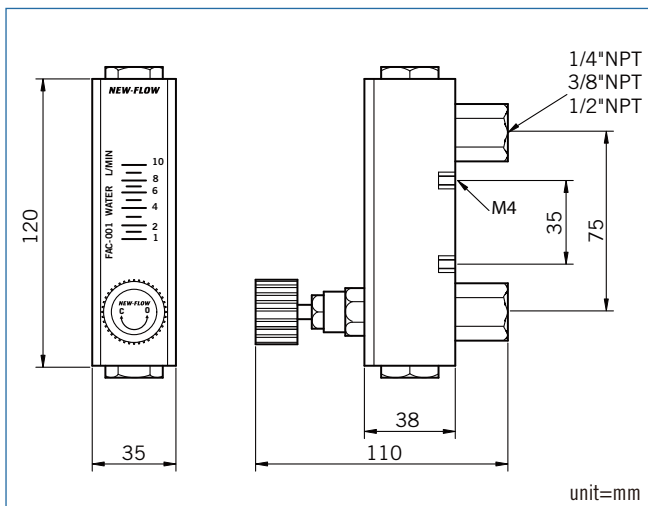

Read Coaction to the Float

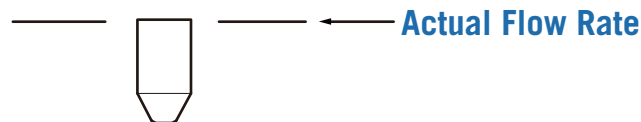

Main Parts List & Installed Method

