



ACRYLIC PLASTIC FLOW METER

FAC200 SERIES

Technical Data

Service: water or liquid
Wetted parts material: Body-Acrylic, Plastic (POLYPROPYLENE), O-ring- EPDM
Float Guide: 304 stainless steel
Connection material: POLYPROPYLENE
Temperature & pressure limits: 120 psig (8.4 bar) @100°F (38°C)
Temperature limited: 0-45°C
Accuracy: ±3% full scale
Mounting: vertical position
Weight: 0.31 kg

Dimensions

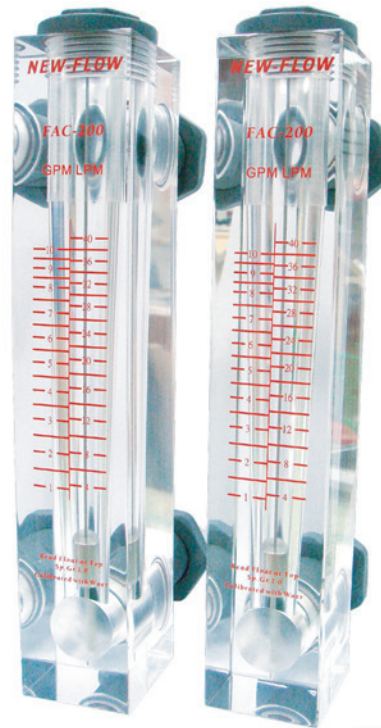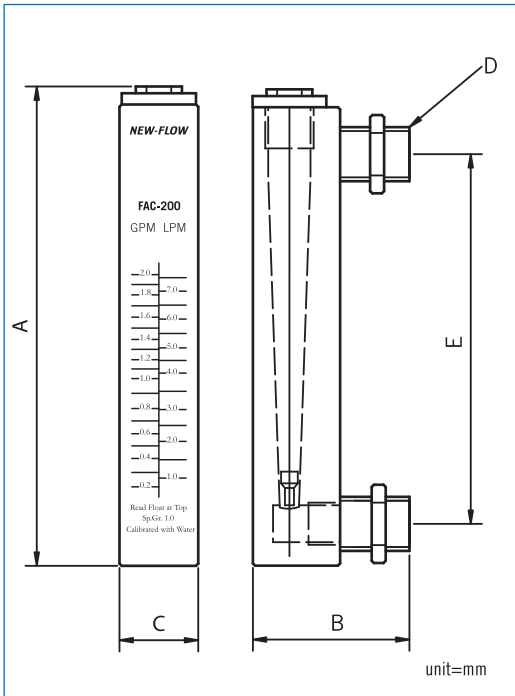

Approvals:



Range Table / Ordering information

| MODEL | Range Dual Scale | | Connection size |
|---------|------------------|-------|-----------------|
| | GPM | LPM | |
| FAC-201 | 0.2 ~2.0 | 1~7.5 | 3/8"NPT(male) |
| FAC-202 | 0.5~5.0 | 2~20 | 1/2"NPT(male) |
| FAC-203 | 1.0~10.0 | 4~40 | 3/4"NPT(male) |

Flow Unit

GPM, Gallon (us) per Minute
 LPM, Litter per Minute

Dimensional Data

| Model | A (inch/mm) | B (inch/mm) | C (inch/mm) | D | E (inch/mm) |
|---------|-------------|-------------|-------------|---------|-------------|
| FAC-201 | 8.4/213.2 | 2.75/70 | 1.38/35 | 3/8"NPT | 6.5/165 |
| FAC-202 | 8.4/213.2 | 2.75/70 | 1.38/35 | 1/2"NPT | 6.5/165 |
| FAC-203 | 9.0/229.2 | 3.75/95.2 | 1.58/40 | 3/4"NPT | 6.5/165 |