


RB-37GM

11 & 12 TYPE



外形尺寸 / Appearance Size

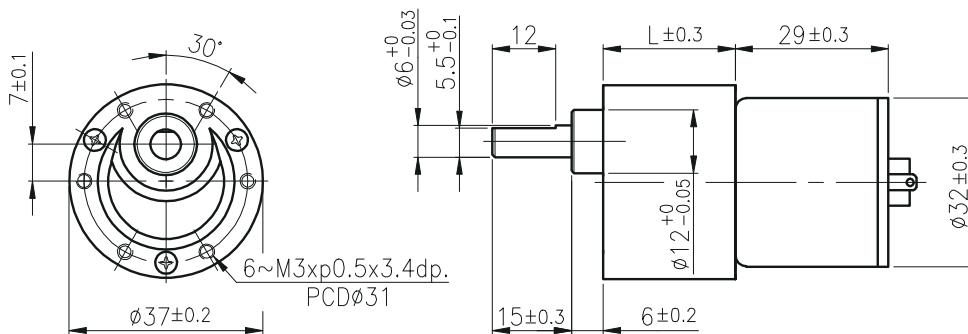

unit:mm

齒輪馬達轉矩 & 速度 / Geared Motor Torque & Speed

	減速比 Reduction ratio	1/10	1/18	1/30	1/50	1/60	1/75	1/90	1/100	1/120	1/150	1/180	1/200	1/250	1/300	1/500	1/600	1/750	1/1000	1/1500	1/3000		
12V	定格扭力 Rated torque (kg-cm)	0.5	0.8	1.3	2	2.4	2.9	3.5	3.9	4.2	5.3	6	6	6	6	6	6	6	6	6	6		
	定格轉數 Rated speed (rpm)	490	270	168	100	84	67	57	51	42.5	34	29	26	22	19	11.2	9.5	8	6	4.1	2		
24V	定格扭力 Rated torque (Kg-cm)	0.5	0.8	1.4	2	2.4	3	3.6	4	4.4	5.4	6	6	6	6	6	6	6	6	6	6		
	定格轉數 Rated speed (rpm)	480	250	160	98	83	65	56	50	41.5	33	28.5	26	22	19	11	9.3	7.9	5.9	4	2		
	軸心迴轉方向 Rotation direction	CW		CCW		CW					CCW					CW		CCW					
	長度 Length (L)	19.5		22		24.5					27					29.5		32					

馬達單體型式 / Motor Data

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	60	5100	≤ 470	6200	≤ 120	3.14	75
24	62	5000	≤ 210	6200	≤ 60	3.17	75

馬達單體特性 / Motor Characteristics

