


RB-40GM

03 & 04 TYPE



外形尺寸/ Appearance Size

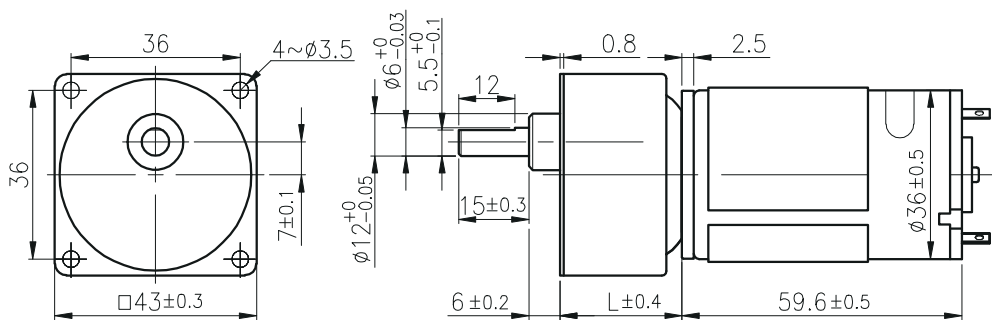

unit:mm

齒輪馬達轉矩 & 速度/ Geared Motor Torque & Speed

		1/10	1/15	1/18	1/25	1/30	1/36	1/50	1/60	1/75	1/90	1/100	1/120	1/150	1/180	1/200	1/250	1/300	1/360	1/400	1/500	
12V	減速比 Reduction ratio																					
	定格扭力 Rated torque (kg-cm)	1	2.7	3	4	4	4	5	5	5	7	7	7	7	7	7	7	7	7	7	7	7
24V	定格轉數 Rated speed (rpm)	519	321	275	198	172	145	103	91	72.5	61	54	46	37	31	28.2	22.5	19.2	16	14.5	11.8	
	定格扭力 Rated torque (Kg-cm)	1	2.6	3	4	4	4	5	5	5	7	7	7	7	7	7	7	7	7	7	7	7
軸心迴轉方向 Rotation direction		CCW				CW				CCW				CW								
長度 Length (L)		23.9				26.4				28.9				31.4								

馬達單體型式/ Motor Data

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	250	4930	≤ 1600	6000	≤ 250	12.80	220
24	240	5150	≤ 750	6000	≤ 130	12.70	220

馬達單體特性/ Motor Characteristics

