


IG-32P



外形尺寸 & 馬達齒鉋合方法 / Appearance Size & Pinion Assembly Dimension

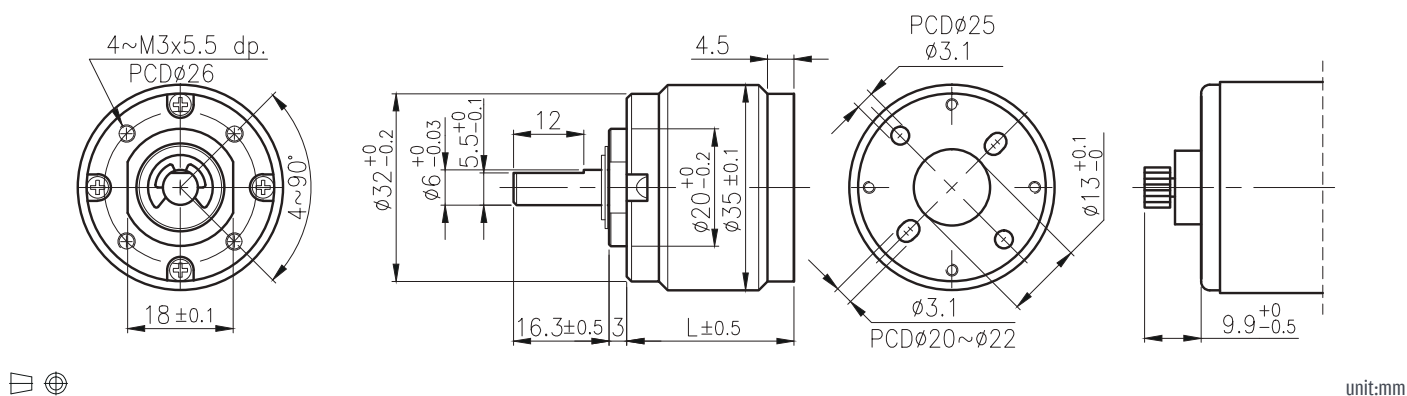

產品規格 / Product Specifications

外殼材質 Housing material	輸出軸承型式 Bearing at output	徑向負荷 Radial load (10mm from flange)	軸向負荷 Shaft axial load	主軸最大承受壓入力 Shaft press fit force, max.	徑向間隙 Radial play of shaft	軸向間隙 Thrust play of shaft	背隙 (無負荷時) Backlash, at no-load
粉末金屬 Powder Metal	含油軸承 Sleeve bearings	≤ 3 kgf	≤ 2.5 kgf	≤ 10 kgf	≤ 0.08 mm	≤ 0.3 mm	$\leq 2.5^\circ$
粉末金屬 Powder Metal	滾珠軸承 Ball bearings	≤ 3.5 kgf	≤ 2.5 kgf	≤ 10 kgf	≤ 0.05 mm	≤ 0.3 mm	$\leq 2.5^\circ$

馬達齒輪型式 / Pinion Specifications

模數 Module	齒數 No. of teeth	壓力角 Pressure angle	孔徑 (mm) Hole diameter	減速比 Reduction ratio
0.5	11	20°	ϕ 2.28, ϕ 2.48, ϕ 2.98, ϕ 3.16	1/5, 1/19, 1/27, 1/71, 1/100, 1/139, 1/264, 1/516, 1/721
0.5	17	20°	ϕ 2.28, ϕ 2.48, ϕ 2.98, ϕ 3.16	1/4, 1/14, 1/51, 1/189

標準減速比型式 / Gearboxes Specifications

減速比 Reduction ratio	1/4	1/5	1/14	1/19	1/27	1/51	1/71	1/100	1/139	1/189	1/264	1/516	1/721						
定格容許扭力 (kgf-cm Max.) Rated tolerance torque	2	2	4	4	6	8	8	10	10	12	12	12	12						
瞬間容許扭力 (kgf-cm) Max momentary tolerance torque	6	6	12	12	18	24	24	30	30	36	36	36	36						
效率 Efficiency	80%	80%	70%	70%	70%	60%	60%	60%	60%	50%	50%	50%	50%						
長度 Length (L)	22.1	22.1	28.5	28.5	28.5	34.9	34.9	34.9	34.9	41.3	41.3	41.3	41.3						
重量 (含油軸承) Weight (g) /Sleeve bearings	109	109	143	143	143	177	177	177	177	211	211	211	211						
重量 (滾珠軸承) Weight (g) /Ball bearings	108	108	142	142	142	176	176	176	176	210	210	210	210						

● 使用相對溼度：20%~85%RH
Operating relative humidity

● 使用溫度範圍：-10°C~+60°C
Operating temperature range