

MASS FLOW METERS Without LCD Display

TAF SERIES

Economy Type
±1.5% Accuracy
Linear Output
Thermal Technology
For Using in Non Corrosive gas
For Flow Rates up to 50 SLM

The NEW-FLOW Thermal Mass Flow Meters provide high performance. Thermal Technology offers advantages in accuracy, sensitivity and turn quality components and the latest technology are combined to provide reliable, compact meters. The TAF Series comes without an LCD display, and come with linear 0-5 VDC output. The TAF Series measures the mass flow rate of gases in 17 ranges from 0-10 SCCM to 0-50 SLM as shown in the range table.

Technical Data


Wetted Material: Standard flowbody– 316 Stainless Steel
 O-ring: Viton or FFKM available
Output Signal: 0-5 VDC Linear min. load 1000Ω
Input Power: 24 VDC, 15 VDC and 12 VDC available
Accuracy: ±1.5% F.S (for 10 SCCM ~ 5 SLM, including linearity)
 ±5% F.S (0~25% Flow Range)
 ±2% F.S (25~100% Flow Range)
Turn Down Ratio: 50 : 1
Repeatability: ±0.15% FS or better
Electric Connection: 5 Pin post header
 (provide with mating connector)
Process connection: ¼" NPT Female
Range: 0-10 SCCM to 0-50 SLM
Minimum Pressure: 40" H₂O
Max. Pressure: 500 PSIG
Temperature Range: 0~50 °C
Response Time: 1 Second
Temp. Coefficient: 0.05% Full scale per 1°C or better
Pressure Coefficient: 0.01% Full scale per PSIG or better
Weight: app. 0.5 kg

Range Table

Code	SCCM	Code	SLM	Code	SLM
00	0-10	06	0-1	14	0~35
01	0-20	07	0-2	15	0~40
02	0-50	08	0-5	16	0~45
03	0-100	09	0-10	17	0-50
04	0-200	10	0-15	18	*Custom Flow Rate
05	0~500	11	0-20		
		12	0-25		
		13	0-30		

*Please notice that the max. flow range is 50 SLM.

Flow Direction




- Please follow the direction of arrow "←" on the label to install. (As shown on the left is the standard installation.)
- If customer requires "Vertical ↑ or ↓" installation, please contact with the manufacturer when place an order.



Approvals:



Dimensions

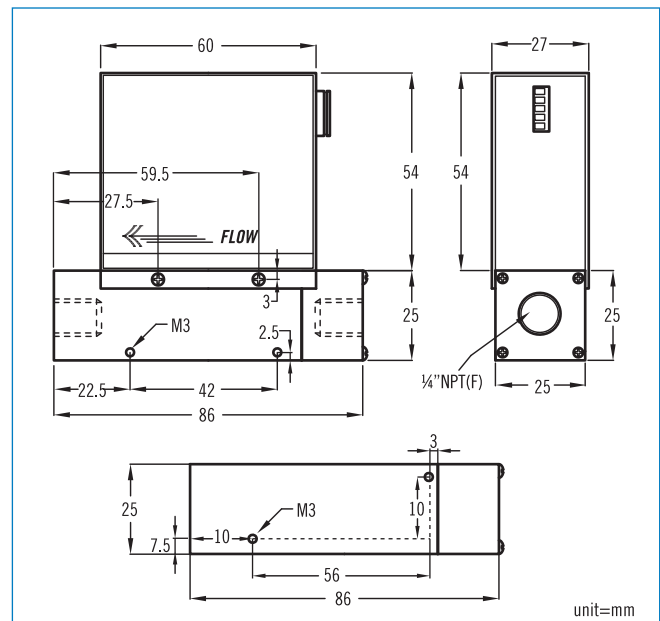

Ordering Information

TAF	Code	Flow Range
	00~17	Please refer to the measure range table.
	18	*Custom range (Please directly fill in the requested range)
	Code	Wetted Material
		(A) SS316 (Viton o-ring) (B) SS316 (FFKM o-ring)
	Code	Process Connection
	1	¼" NPT (F)
	Code	Display
	0	Without display
	Code	Output Signal
		(1) 0-5VDC
	Code	Input Power
	1	24 VDC
	2	15 VDC
	3	12 VDC