
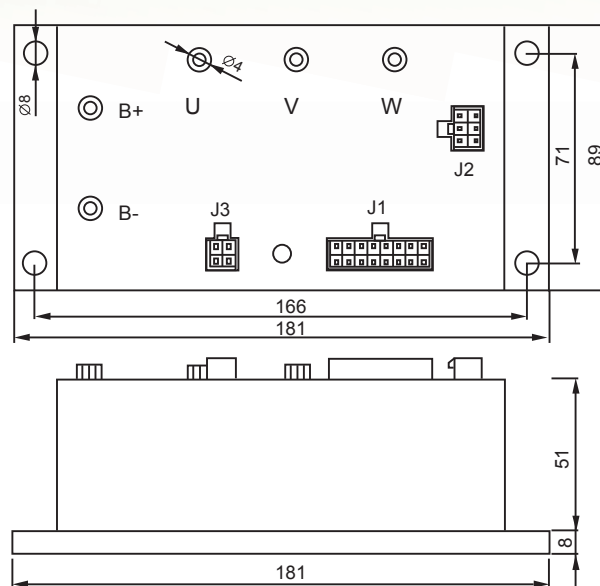


BLM4806 Series Driver

中文功能規格


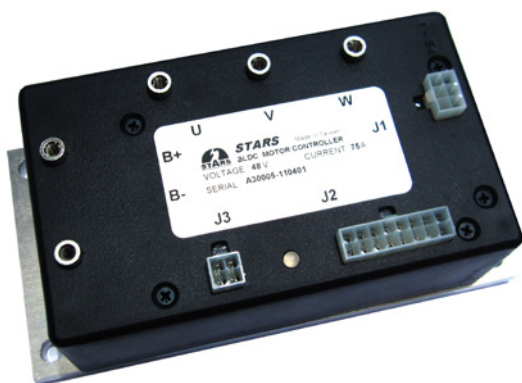


編號	功能名稱	功能
1	馬達連接端子	連接馬達動力線 UVW
2	Hall sensor/OT 端子	馬達 Hall sensor 端子及溫度開關端子
3	DC 入力電源端子	48VDC 電源接點 (24VDC/36VDC 為選購品)
4	輸入 / 輸出訊號	4. 主電磁閥驅動 5. +5V 電源 6. 電子油門訊號輸入 7. 油門地線 8. 電阻式油門輸入 11. 馬達正轉訊號輸入 12. 馬達反轉訊號輸入 13. EMR 輸入 14. 馬達溫度開關輸入 15. Interlock 輸入 16. 控制器電源輸入
5	通訊接頭	書寫器 (非賣品) 輸入參數用
外觀尺寸		181mmx89mmx59mm (含散熱底板)
連續輸入功率		1KW (48VDC) 750W(36VDC) 500W (24VDC)
速度變動率		±1% 額定轉速 (0~ 額定轉矩)
操作環境		溫度 -20℃ ~50℃ [-4 ℉ ~122 ℉]
環境濕度		<85%RH (不結霜)
速度控制方式		◆外部可變電阻調速 ◆外部電壓調速
保護功能		◆過電壓 / 低電壓輸出關閉保護 ◆過負載保護 ◆欠相保護 ◆馬達過熱保護 ◆驅動器過熱保護 (出廠預設溫度為 70℃)
其他功能 (需加購書寫器)		◆控制面板通訊介面 ◆輸入參數設定 (加減速時間 / 轉速上限) ◆馬達轉速監控
保護等級		IP00

※ 可向原採購經銷商索取使用說明書。

BLM4806 Series Driver

英文功能規格

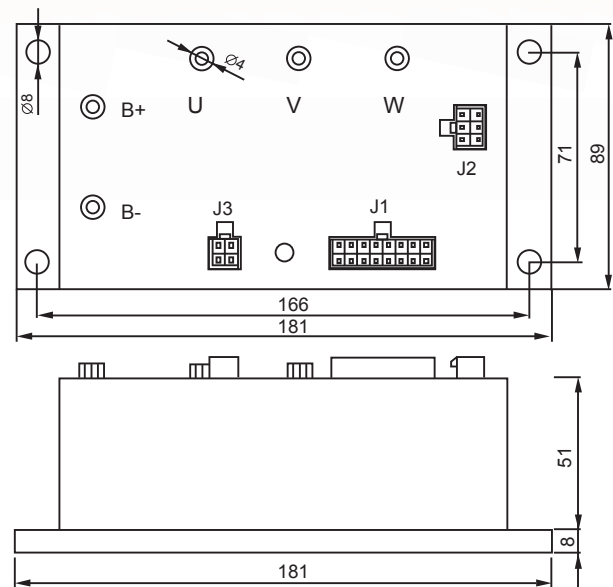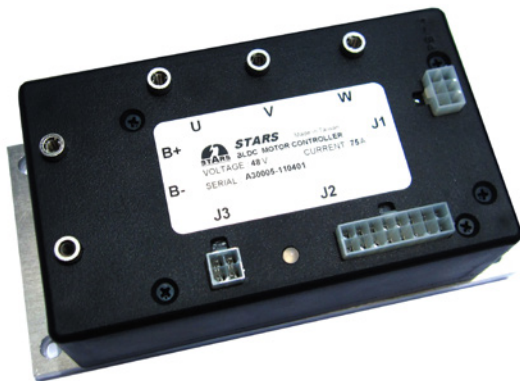

No.	Display	Function
1	Power motor connector	Motor connector (UVW)
2	Hall sensor/OT	Hall sensor and over temperature of motor
3	DC power input	Power input (48VDC) (24VDC/36VDC is optional)
4	Input/output control	4. Main relay output 5. +5V output 6. Electric throttle input 7. Ground wire 8. VR wiper input 11. Forward input 12. Reverse input 13. EMR input 14. Motor temperature sensor input 15. Interlock input 16. Controller logic power
5	Communication port	Control key pad is required to change input control functions (item is not for sale)
Dimension		181mmx89mmx59mm
Rated output power of motor		1KW (48VDC) 750W(36VDC) 500W (24VDC)
Speed regulation		±1% rated speed(0~rated torque)
Operation Temperature		-20℃ ~50℃ [-4 ℉ ~122 ℉]
Humidity of Environment		<85%RH (non-condensing)
Speed setting		◆ External VR ◆ External DC voltage
Protection		◆ Over Voltage/Low voltage protection ◆ Overload protection ◆ Out of phase protection ◆ Over heat of motor protection ◆ Over heat of driver protection (Default temp. is 70℃)
Other function/ with panel(Accessory)		◆ Require optional control key pad to change input control functions ◆ Motor speed monitor
Degree of protection		IP00

※ User manual or customize specification, please contact distributor.

BLM4806 Series Driver

接線圖

