




YTK CO.,LTD.

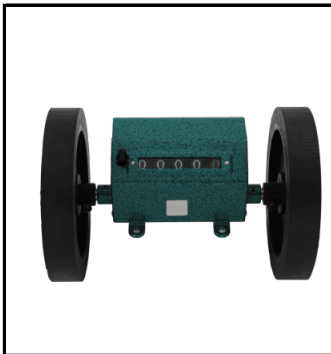


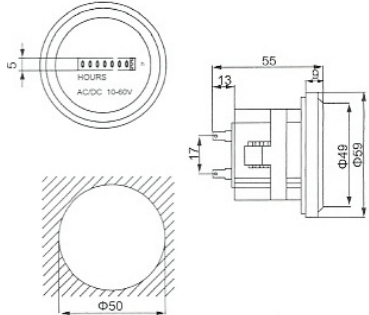

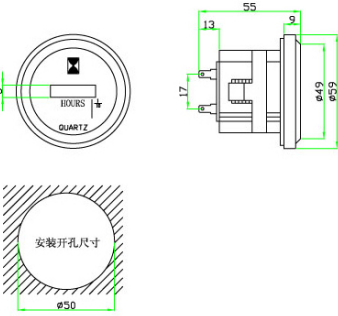

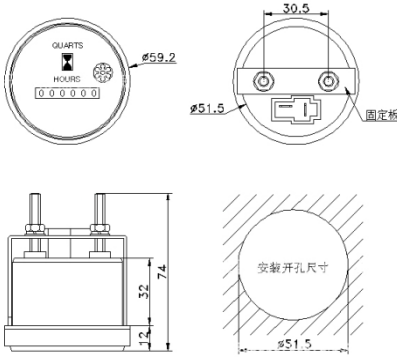

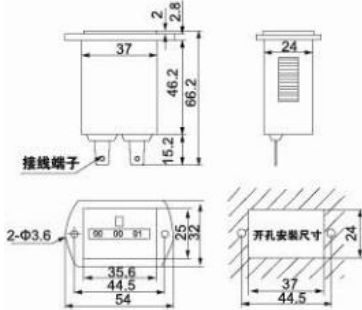

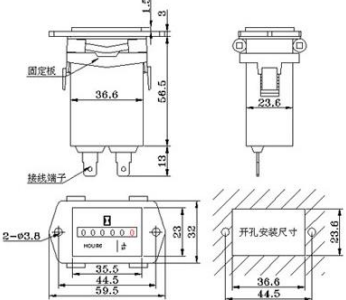
日本総代理

株式会社YTK

〒556-0011 大阪市浪速区難波中2 - 10 - 70 難波パークスタワー19F


Tel:06-7662-8687

info@ytk-group.co.jp


| | | | | | | | | | | | | | | | | | | | | |
|--|---|-------|--------|--------------|-----------------|-----------------|-------|-------|----|---------------|------------------------------------|-------|------|-------------|----------------|-------------------|--------------------------|---|--------------------------|---|
|  | <table border="1"> <tr><td>Model</td><td>TH-1</td></tr> <tr><td>Timing range</td><td>0-99999.99Hours</td></tr> <tr><td>timing accuracy</td><td>±0.01</td></tr> <tr><td>Reset</td><td>no</td></tr> <tr><td>voltage types</td><td>10-60V(AC and DC both), AC220-240V</td></tr> <tr><td>Power</td><td>0.3W</td></tr> <tr><td>temperature</td><td>-10 °C --50 °C</td></tr> <tr><td>relative humidity</td><td>Sealed</td></tr> <tr><td>the amplitude</td><td>10-70HZ 1-8g (gravity)</td></tr> </table> | Model | TH-1 | Timing range | 0-99999.99Hours | timing accuracy | ±0.01 | Reset | no | voltage types | 10-60V(AC and DC both), AC220-240V | Power | 0.3W | temperature | -10 °C --50 °C | relative humidity | Sealed | the amplitude | 10-70HZ 1-8g (gravity) |  |
| Model | TH-1 | | | | | | | | | | | | | | | | | | | |
| Timing range | 0-99999.99Hours | | | | | | | | | | | | | | | | | | | |
| timing accuracy | ±0.01 | | | | | | | | | | | | | | | | | | | |
| Reset | no | | | | | | | | | | | | | | | | | | | |
| voltage types | 10-60V(AC and DC both), AC220-240V | | | | | | | | | | | | | | | | | | | |
| Power | 0.3W | | | | | | | | | | | | | | | | | | | |
| temperature | -10 °C --50 °C | | | | | | | | | | | | | | | | | | | |
| relative humidity | Sealed | | | | | | | | | | | | | | | | | | | |
| the amplitude | 10-70HZ 1-8g (gravity) | | | | | | | | | | | | | | | | | | | |
|  | <table border="1"> <tr><td>Model</td><td>SH-1</td></tr> <tr><td>Timing range</td><td>0-99999.9Hours</td></tr> <tr><td>timing accuracy</td><td>±0.01</td></tr> <tr><td>Reset</td><td>no</td></tr> <tr><td>voltage types</td><td>10-80V(AC and DC both), AC100-250V</td></tr> <tr><td>Power</td><td>0.3W</td></tr> <tr><td>temperature</td><td>-10 °C --50 °C</td></tr> <tr><td>relative humidity</td><td>Sealed</td></tr> <tr><td>the amplitude</td><td>10-70HZ 1-8g (gravity)</td></tr> </table> | Model | SH-1 | Timing range | 0-99999.9Hours | timing accuracy | ±0.01 | Reset | no | voltage types | 10-80V(AC and DC both), AC100-250V | Power | 0.3W | temperature | -10 °C --50 °C | relative humidity | Sealed | the amplitude | 10-70HZ 1-8g (gravity) |  |
| Model | SH-1 | | | | | | | | | | | | | | | | | | | |
| Timing range | 0-99999.9Hours | | | | | | | | | | | | | | | | | | | |
| timing accuracy | ±0.01 | | | | | | | | | | | | | | | | | | | |
| Reset | no | | | | | | | | | | | | | | | | | | | |
| voltage types | 10-80V(AC and DC both), AC100-250V | | | | | | | | | | | | | | | | | | | |
| Power | 0.3W | | | | | | | | | | | | | | | | | | | |
| temperature | -10 °C --50 °C | | | | | | | | | | | | | | | | | | | |
| relative humidity | Sealed | | | | | | | | | | | | | | | | | | | |
| the amplitude | 10-70HZ 1-8g (gravity) | | | | | | | | | | | | | | | | | | | |
|  | <table border="1"> <tr><td>Model</td><td>LY-748</td></tr> <tr><td>Timing range</td><td>0-99999.9h60m</td></tr> <tr><td>timing accuracy</td><td>±0.01</td></tr> <tr><td>Reset</td><td>no</td></tr> <tr><td>voltage types</td><td>12-36V(AC and DC both), AC100-250V</td></tr> <tr><td>Power</td><td>0.3W</td></tr> <tr><td>temperature</td><td>-10 °C --50 °C</td></tr> <tr><td>relative humidity</td><td>Sealed</td></tr> <tr><td>the amplitude</td><td>10-70HZ 1-8g (gravity)</td></tr> </table> | Model | LY-748 | Timing range | 0-99999.9h60m | timing accuracy | ±0.01 | Reset | no | voltage types | 12-36V(AC and DC both), AC100-250V | Power | 0.3W | temperature | -10 °C --50 °C | relative humidity | Sealed | the amplitude | 10-70HZ 1-8g (gravity) |  |
| Model | LY-748 | | | | | | | | | | | | | | | | | | | |
| Timing range | 0-99999.9h60m | | | | | | | | | | | | | | | | | | | |
| timing accuracy | ±0.01 | | | | | | | | | | | | | | | | | | | |
| Reset | no | | | | | | | | | | | | | | | | | | | |
| voltage types | 12-36V(AC and DC both), AC100-250V | | | | | | | | | | | | | | | | | | | |
| Power | 0.3W | | | | | | | | | | | | | | | | | | | |
| temperature | -10 °C --50 °C | | | | | | | | | | | | | | | | | | | |
| relative humidity | Sealed | | | | | | | | | | | | | | | | | | | |
| the amplitude | 10-70HZ 1-8g (gravity) | | | | | | | | | | | | | | | | | | | |
|  | <table border="1"> <tr><td>Model</td><td>SYS-1</td></tr> <tr><td>Timing range</td><td>0-99999.9Hours</td></tr> <tr><td>timing accuracy</td><td>±0.01</td></tr> <tr><td>Reset</td><td>no</td></tr> <tr><td>voltage types</td><td>10V-80VDC AC100-250V</td></tr> <tr><td>Power</td><td>0.3W</td></tr> <tr><td>temperature</td><td>-10 °C --50 °C</td></tr> <tr><td>relative humidity</td><td>Sealed</td></tr> <tr><td>the amplitude</td><td>10-70HZ 1-8g (gravity)</td></tr> </table> | Model | SYS-1 | Timing range | 0-99999.9Hours | timing accuracy | ±0.01 | Reset | no | voltage types | 10V-80VDC AC100-250V | Power | 0.3W | temperature | -10 °C --50 °C | relative humidity | Sealed | the amplitude | 10-70HZ 1-8g (gravity) |  |
| Model | SYS-1 | | | | | | | | | | | | | | | | | | | |
| Timing range | 0-99999.9Hours | | | | | | | | | | | | | | | | | | | |
| timing accuracy | ±0.01 | | | | | | | | | | | | | | | | | | | |
| Reset | no | | | | | | | | | | | | | | | | | | | |
| voltage types | 10V-80VDC AC100-250V | | | | | | | | | | | | | | | | | | | |
| Power | 0.3W | | | | | | | | | | | | | | | | | | | |
| temperature | -10 °C --50 °C | | | | | | | | | | | | | | | | | | | |
| relative humidity | Sealed | | | | | | | | | | | | | | | | | | | |
| the amplitude | 10-70HZ 1-8g (gravity) | | | | | | | | | | | | | | | | | | | |
|  | <table border="1"> <tr><td>Model</td><td>SYS-2</td></tr> <tr><td>Timing range</td><td>0-99999.9Hours</td></tr> <tr><td>timing accuracy</td><td>±0.01</td></tr> <tr><td>Reset</td><td>no</td></tr> <tr><td>voltage types</td><td>10V-80VDC AC100-250V</td></tr> <tr><td>Power</td><td>0.3W</td></tr> <tr><td>temperature</td><td>-10 °C --50 °C</td></tr> <tr><td>the amplitude</td><td>10-70HZ 1-8g (gravity)</td></tr> </table> | Model | SYS-2 | Timing range | 0-99999.9Hours | timing accuracy | ±0.01 | Reset | no | voltage types | 10V-80VDC AC100-250V | Power | 0.3W | temperature | -10 °C --50 °C | the amplitude | 10-70HZ 1-8g (gravity) |  | | |
| Model | SYS-2 | | | | | | | | | | | | | | | | | | | |
| Timing range | 0-99999.9Hours | | | | | | | | | | | | | | | | | | | |
| timing accuracy | ±0.01 | | | | | | | | | | | | | | | | | | | |
| Reset | no | | | | | | | | | | | | | | | | | | | |
| voltage types | 10V-80VDC AC100-250V | | | | | | | | | | | | | | | | | | | |
| Power | 0.3W | | | | | | | | | | | | | | | | | | | |
| temperature | -10 °C --50 °C | | | | | | | | | | | | | | | | | | | |
| the amplitude | 10-70HZ 1-8g (gravity) | | | | | | | | | | | | | | | | | | | |




| | |
|-----------------|--------------------------|
| Model | SYS-3 |
| Timing range | 0-99999.9Hours |
| timing accuracy | ±0.01 |
| Reset | no |
| voltage types | 10V-80VDC AC100-250V |
| Power | 0.3W |
| temperature | -10 °C --50 °C |
| the amplitude | 10-70HZ 1-8g (gravity) |

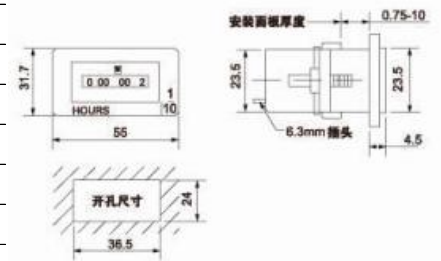


| | |
|-----------------|--------------------------|
| Model | SYS-4 |
| Timing range | 0-99999.9Hours |
| timing accuracy | ±0.01 |
| Reset | no |
| voltage types | 10V-80VDC AC100-250V |
| Power | 0.3W |
| temperature | -10 °C --50 °C |
| the amplitude | 10-70HZ 1-8g (gravity) |

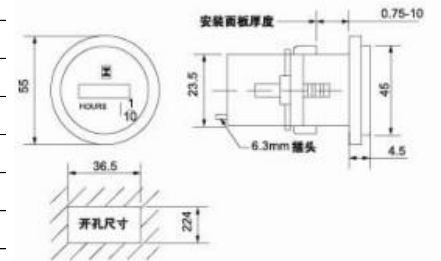


| | |
|-----------------|--------------------------|
| Model | SYS-5 |
| Timing range | 0-99999.9Hours |
| timing accuracy | ±0.01 |
| Reset | no |
| voltage types | 10V-80VDC AC100-250V |
| Power | 0.3W |
| temperature | -10 °C --50 °C |
| the amplitude | 10-70HZ 1-8g (gravity) |

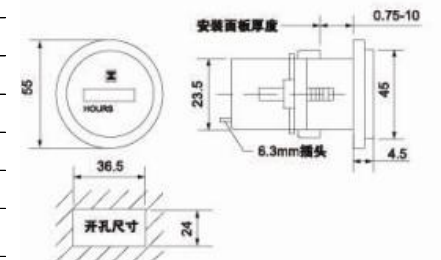

| | |
|-----------------|-----------------------------|
| Model | SYS |
| Timing range | 0-9999.9Hours |
| timing accuracy | ±0.01 |
| Reset | no |
| voltage types | AC220V(50Hz、60Hz) DC12V-36V |
| install | fixed on the plate by bolt |
| temperature | -10 °C --50 °C |
| the amplitude | 10-70HZ 1-8g (gravity) |

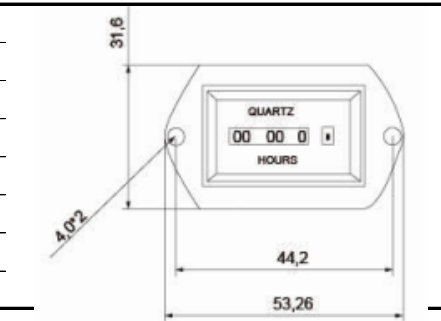


| | |
|-----------------|---|
| Model | HM-1 |
| Timing range | 0-99999.99Hours |
| timing accuracy | ±0.01 |
| Reset | no |
| voltage types | AC220-240V 50Hz AC110V 50Hz AC24V 50Hz ,AC220V-240V 60Hz AC24V 60Hz |
| Power | 0.3W |
| temperature | -10 °C --50 °C |
| the amplitude | 10-70HZ 1-8g (gravity) |

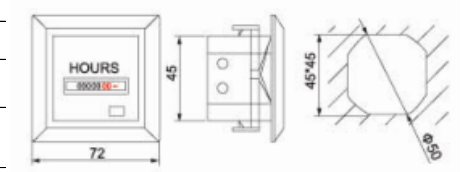





| | |
|------------------------|---|
| Model | HM-1 |
| Timing range | 0-99999.99Hours |
| timing accuracy | ±0.01 |
| Reset | no |
| voltage types | AC220-240V 50Hz AC110V 50Hz AC24V 50Hz ,AC220V-240V 60Hz AC24V 60Hz |
| Power | 0.3W |
| temperature | -10 °C --50 °C |
| the amplitude | 10-70HZ 1-8g (gravity) |

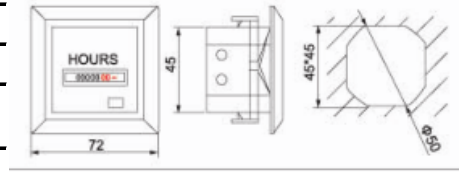

| | |
|------------------------|---|
| Model | HM-2/UWZ48 |
| Timing range | 0-99999.99Hours |
| timing accuracy | ±0.01 |
| Reset | no |
| voltage types | AC220-240V 50Hz AC110V 50Hz AC24V 50Hz ,AC220V-240V 60Hz AC24V 60Hz |
| voltage types | DC10V-60V DC24V |
| temperature | -10 °C --50 °C |
| the amplitude | 10-70HZ 1-8g (gravity) |

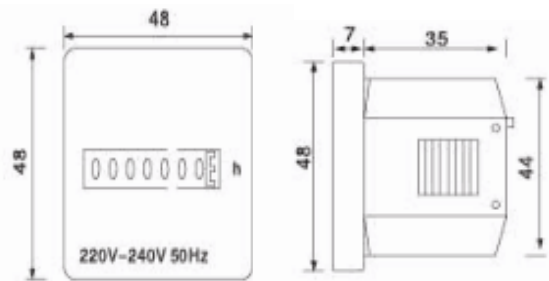


| | |
|------------------------|---|
| Model | HM-2/UWZ48 |
| Timing range | 0-99999.99Hours |
| timing accuracy | ±0.01 |
| Reset | no |
| voltage types | AC220-240V 50Hz AC110V 50Hz AC24V 50Hz ,AC220V-240V 60Hz AC24V 60Hz |
| voltage types | DC10V-60V DC24V |
| temperature | -10 °C --50 °C |
| the amplitude | 10-70HZ 1-8g (gravity) |

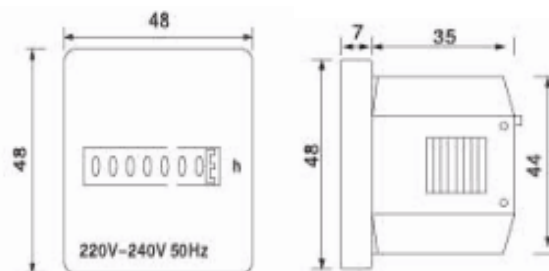





| | |
|----------------------------|-------------------------------------|
| Model | CSK6-YKW |
| Count range | 0-999999 Number of digits: 6 digits |
| Rated Voltage | DC12V,DC24V,AC110V, AC220V |
| Tolerance | Rated Voltage -15%~+10% |
| Power | DC:3.5W,AC:3W |
| Life | 20,000,000 Times |
| Count speed | DC:20cps, AC: 10cps |
| Ambient temperature | -20℃- 50℃ Humidity: ≤85% |
| Installation | Panel mounting |

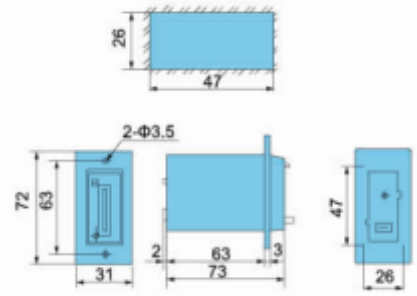


| | |
|----------------------------|-------------------------------------|
| Model | CSK6-NKW |
| Count range | 0-999999 Number of digits: 6 digits |
| Rated Voltage | DC12V,DC24V,AC110V, AC220V |
| Tolerance | Rated Voltage -15%~+10% |
| Power | DC:3.5W,AC:3W |
| Life | 20,000,000 Times |
| Count speed | DC:20cps, AC: 10cps |
| Ambient temperature | -20℃- 50℃ Humidity: ≤85% |
| Installation | Buckle mounting |

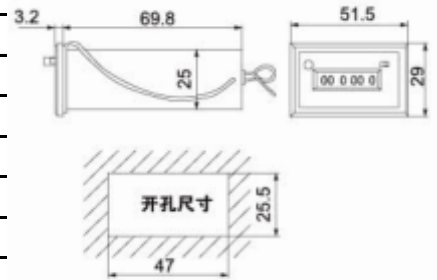


| | |
|----------------------------|------------------------------------|
| Model | CSK5-YKW |
| Count range | 0-99999 Number of digits: 5 digits |
| Rated Voltage | DC12V,DC24V,AC110V, AC220V |
| Tolerance | Rated Voltage -15%~+10% |
| Power | DC:1.5W,AC:2.5VA |
| Life | 20,000,000 Times |
| Count speed | DC:20cps, AC: 10cps |
| Ambient temperature | -20℃- 50℃ Humidity: ≤85% |
| Installation | Panel mounting |

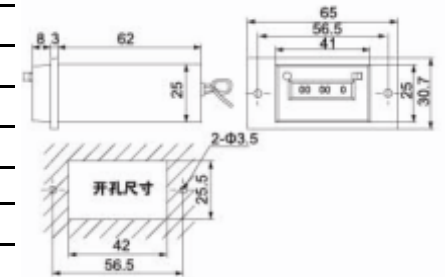


| | |
|----------------------------|------------------------------------|
| Model | CSK5-NKW |
| Count range | 0-99999 Number of digits: 5 digits |
| Rated Voltage | DC12V,DC24V,AC110V, AC220V |
| Tolerance | Rated Voltage -15%~+10% |
| Power | DC:1.5W,AC:2.5VA |
| Life | 20,000,000 Times |
| Count speed | DC:20cps, AC: 10cps |
| Ambient temperature | -20℃- 50℃ Humidity: ≤85% |
| Installation | Buckle mounting |

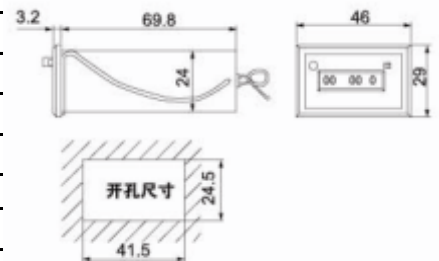



| | |
|----------------------------|----------------------------------|
| Model | CSK4-YKW |
| Count range | 0-9999 Number of digits: 4digits |
| Rated Voltage | DC12V,DC24V,AC110V, AC220V |
| Tolerance | Rated Voltage -15%~+10% |
| Power | DC:1.5W,AC:2.5VA |
| Life | 20,000,000 Times |
| Count speed | DC:20cps, AC: 10cps |
| Ambient temperature | -20℃- 50℃ Humidity: ≤85% |
| Installation | Panel mounting |

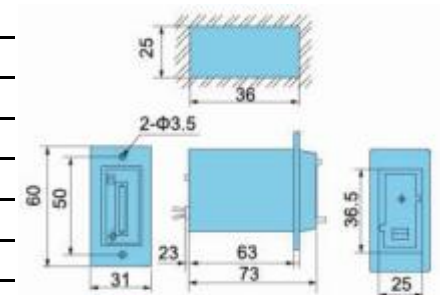





| | |
|----------------------------|----------------------------------|
| Model | CSK4-NKW |
| Count range | 0-9999 Number of digits: 4digits |
| Rated Voltage | DC12V,DC24V,AC110V, AC220V |
| Tolerance | ±10% |
| Power | DC:1.5W,AC:2.5VA |
| Life | 20,000,000 Times |
| Count speed | DC:20cps, AC: 10cps |
| Ambient temperature | -20 ℃- 50 ℃ Humidity: ≤85% |
| Installation | Buckle mounting |

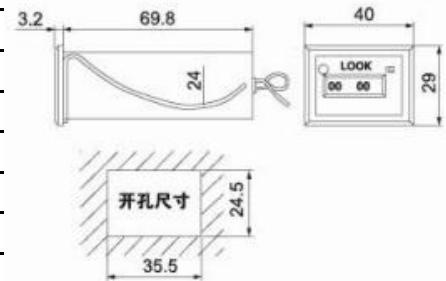





| | |
|----------------------------|----------------------------------|
| Model | MCF-4X |
| Count range | 0-9999 Number of digits: 4digits |
| Rated Voltage | DC24V,AC220V DC12V,AC110V, |
| Tolerance | ±10% |
| Power | DC:1.5W,AC:2.5VA |
| Life | 20,000,000 Times |
| Count speed | DC:20cps, AC: 10cps |
| Ambient temperature | -20 ℃- 50 ℃ Humidity: ≤85% |
| Installation | Buckle mounting |

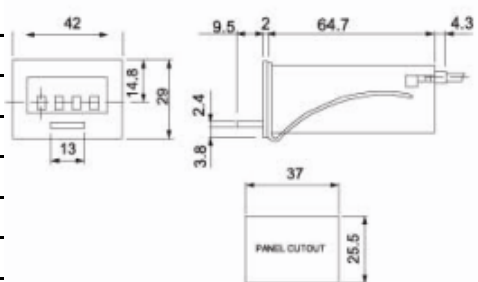





| | |
|----------------------------|------------------------------------|
| Model | MCF-6X |
| Count range | 0-999999 Number of digits: 6digits |
| Rated Voltage | DC24V,AC220V DC12V,AC110V, |
| Tolerance | ±10% |
| Power | DC:1.5W,AC:2.5VA |
| Life | 20,000,000 Times |
| Count speed | DC:20cps, AC: 10cps |
| Ambient temperature | -20 ℃- 50 ℃ Humidity: ≤85% |
| Installation | Buckle mounting |

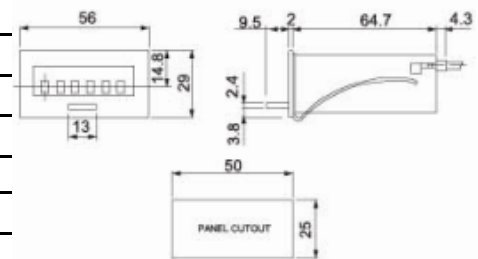




| | |
|----------------------------|------------------------------------|
| Model | LFC-6 |
| Count range | 0-999999 Number of digits: 6digits |
| Rated Voltage | DC12V,DC24V,AC110V, AC220V |
| Tolerance | ±10% |
| Power | DC:1.5W,AC:2.5VA |
| Life | 20,000,000 Times |
| Count speed | DC:20cps, AC: 10cps |
| Ambient temperature | -20 ℃- 50 ℃ Humidity: ≤85% |
| Installation | Surface mounting |

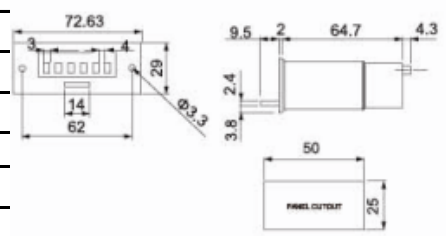




| | |
|----------------------------|---|
| Model | LFC-6S |
| Count range | 0-999999 Number of digits: 6digits |
| Rated Voltage | DC12V,DC24V,AC110V, AC220V |
| Tolerance | ±10% |
| Power | DC:1.5W,AC:2.5VA |
| Life | 20,000,000 Times |
| Count speed | DC:20cps, AC: 10cps |
| Ambient temperature | -20 ℃- 50 ℃ Humidity: ≤85% |
| Installation | Surface mounting use the spring clamp or tail with screws |

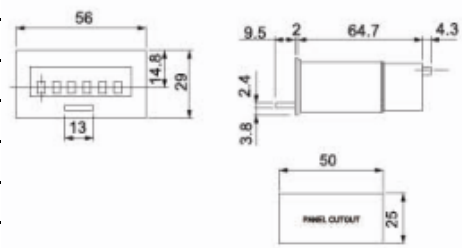





| | |
|---------------------|--|
| Model | JDM11-6H(4 feet) |
| Count range | 0-999999 Number of digits: 6digits |
| Rated Voltage | DC12V,DC24V,AC36V AC110V, AC220V |
| Tolerance | Rated Voltage -15%~+10% |
| Power | ≤2W |
| Count speed | 20cps |
| loss power | with memory function data instore 10 years |
| Ambient temperature | -20 ℃- 50 ℃ Humidity: ≤85% |
| count input type | There is voltage and no voltage. |

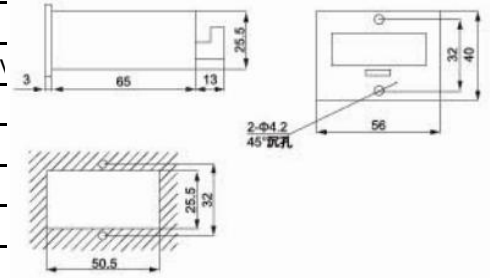


| | |
|---------------------|--|
| Model | JDM11-6H(5 feet) |
| Count range | 0-999999 Number of digits: 6digits |
| Rated Voltage | DC12V,DC24V,AC36V AC110V, AC220V |
| Tolerance | Rated Voltage -15%~+10% |
| Power | ≤2W |
| Count speed | 20cps |
| loss power | with memory function data instore 10 years |
| Ambient temperature | -20 ℃- 50 ℃ Humidity: ≤85% |
| count input type | use with npn sensor photoelectric switch |

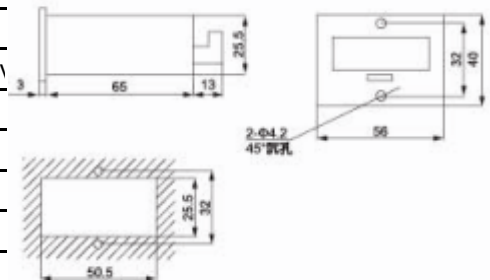

| | |
|---------------------|--|
| Model | JDM11-5H |
| Count range | 0-99999 Number of digits: 5digits |
| Rated Voltage | DC12V,DC24V,AC36V AC110V, AC220V |
| Tolerance | Rated Voltage -15%~+10% |
| Power | ≤2W |
| Count speed | 20cps |
| loss power | with memory function data instore 10 years |
| Ambient temperature | -20 ℃- 50 ℃ Humidity: ≤85% |
| count input type | There is voltage and no voltage. |

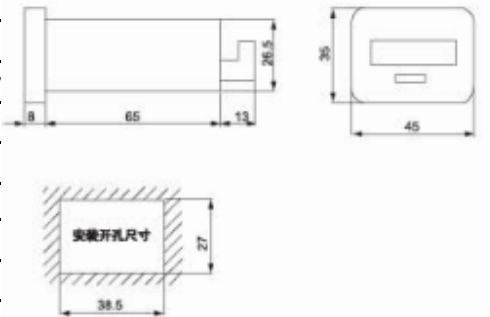

| | |
|---------------------|------------------------------------|
| Model | 6H-A Punch counter |
| Count range | 0-999999 Number of digits: 6digits |
| Rated Voltage | DC12V,DC24V,AC36V AC110V, AC220V |
| Tolerance | Rated Voltage -15%~+10% |
| Power | DC1.5W AC2.5W |
| Count speed | DC:20cps, AC: 10cps |
| Error value | <1×0.00001 |
| Ambient temperature | -20 ℃- 50 ℃ Humidity: ≤85% |
| Installation | Screw installation |

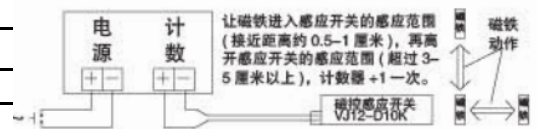

| | |
|---------------------|-----------------------------------|
| Model | LY-05A Punch counter |
| Count range | 0-99999 Number of digits: 5digits |
| Rated Voltage | DC12V,DC24V,AC36V AC110V, AC220V |
| Tolerance | Rated Voltage -15%~+10% |
| Power | DC1.5W AC2.5W |
| Count speed | 10cps |
| Error value | <1×0.00001 |
| Ambient temperature | -20 ℃- 50 ℃ Humidity: ≤85% |
| Installation | Buckle mounting |

Overall dimensions

6.5CM*3CM*4CM

Z96-F reverse meter



Z96-F meter



Z94-F length counter



wheel(M)



Outer diameter:106.1mm

wheel(Y)



Outer diameter:97mm

LY-05A



LY-5B



LY-5C



LY-5D



D67F



D94S



Circular mould counter



CVP-200 mould counter



Liquid crystal mould counter



Liquid crystal mould counter



LY-04A black



LY-04 black



LY-04 red



hand counter metal



hand counter metal

