



SF50621-1 Brass Battery terminal



SF50621-2 Brass Battery terminal



SF50624 Brass terminal



SF50620 Brass Battery terminal



SF50625-3 Brass Battery terminal




SF50622 Brass Battery terminal



SF50625-8 Brass Battery terminal



SF50625-4 Brass Battery terminal

SF50625-3 Zinc Alloy battery terminal
Copper Plating

SF50626-2 Brass Battery terminal plated



SF50626-4 Brass Battery terminal plated



SF50625-9 Brass Battery terminal

SF50621-4 Lead battery terminal
Lead metal alloy, fixed bolt,
with copper plated nut

SF50621-6 Lead metal alloy, coated



SF50621-10 Lead Battery terminal



SF50621-7 Lead Battery terminal

SF50621-8 Lead Battery terminal
clamp styleSF50621-9 Lead Battery terminal
clamp style, coatedSF50621-5 Lead battery terminal
Posi:3/8 (10mm);neg.:5/16 (8mm)
Lead metal alloySF50626-6 Zinc Alloy battery terminal
Galvanized

Battery terminal boot PVC
Negative & positive as a set
Sf50520



-1

-7



-2

-8



-3

-11



-4

-12



-5

-13



-6

-14



SF50855 Digital Battery Tester



SF50856 Digital Battery Tester



SF50857 Vehicle Battery Tester



SF50847 12V Lead Acid & Lithium Battery Tester



SF50858 12V&24V Battery Tester



SF50846 Bluetooth 4.0 Battery Monitor BM2




SF50849 12V Battery tester with printer




SF50859 12V&24V Battery tester with printer

SF51108-2 Copper plated battery clips
75MM , 30A

SF50841 OBD2 Diagnostic Tool

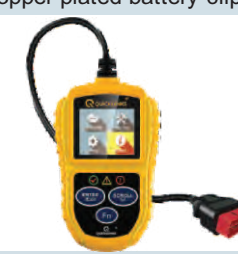SF55233 DC12V battery charger with maintainer
Battery type:Lead-acid,AGM ,GEL,EFB,lithium(LiFeP04)battery
Battery capacity:6AH-65AH,maintains charging up to 130AH
Water proof technology for Ip65
Input:AC100-110V OR 220-240V
Output : DC12V/3.8A,MAX60WSF55234 DC12V battery charger with maintainer
Battery type:Lead-acid,AGM,GEL,EFB,batteries
Battery capacity : 6AH-30AH,maintains charging up to 130AH
Input:AC100-240V
Output:DC12V/1.1A,MAX16.5W

SF50840 Battery Analyzer

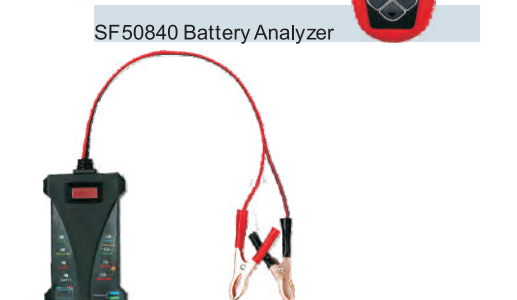SF55235 DC12V Battery & loading tester
DC12V three battery reading: Full (12.8V) MID(12.4V) LOW(12V)
DC12V loading test: Full (9.5-10.5V) MID(8-8.5V) LOW(7-7.5V)
28" leads with alligator clip12V LED display battery tester
With 6*led indicationSF NO. Detail
SF53015-1 with clamp
SF53015-2 with cigarette plugSF50844 12V led digital tester & charging system analyzer
With 8*led indication
With clamp & Cable
For 4~20V battery
With sound warning



SF51807 12V Standard battery box

For caravan RV Motor Home Yacht Marine
Suits battery size: 350(W)*200(H)*180(D)mm
On/Off Switch Press Switch
High Current Terminal Post + -
Dual USB socket 3.1A
Voltmeter DC 6-30V
Circuit Breaker 10A
CIG Socket
Pre-Wires connection
Bearing Belt
Two Solar Charge Waterproof Plugs


Basic battery box
PP material
Strap to secure lid to box

SF NO.	Internal size	External size
SF51805-1	260*180*200	340*245*270
SF51805-2	350*180*230	450*260*310
SF51805-3	350*180*200	440*245*270

SF51805-2

Divider in box for different size batteries

Plastic battery box
With mounting screw & fixing band
SF No. Size (L*W*H)
SF50801-1 340*200*260mm
SF50801-2 282*184*260mm

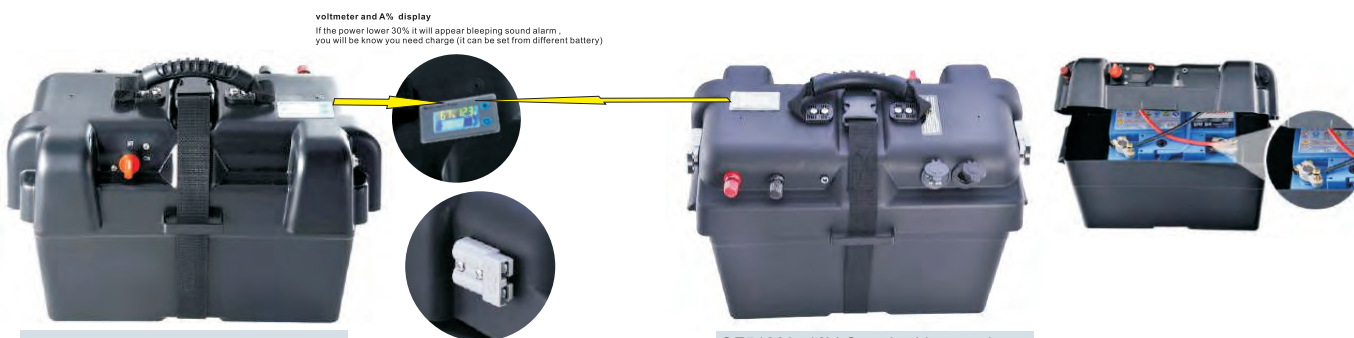

SF51808 12V Standard battery box

For caravan RV Motor Home Yacht Marine
Suits battery size: 350(W)*200(H)*180(D)mm
On/Off Switch
High Current Terminal Post + -
Dual USB socket 3.1A
Voltmeter DC 6-30V
Portable Handle
Circuit Breaker 10A
CIG Socket
Pre-Wires connection
Bearing Belt

SF51809 12V Standard battery box

For caravan RV Motor Home Yacht Marine
Suits battery size: 350(W)*200(H)*225(D)mm
On/Off Switch
High Current Terminal Post + -
Dual USB socket 3.1A
Voltmeter DC 6-30V
Portable Handle
Circuit Breaker 10A
CIG Socket
Pre-Wires connection
Bearing Belt
Two Solar Charge Waterproof Plugs



SF50865-DC/DC25A

Portable multi-function battery box
External size: 480(L)x260(W)x360(H)MM
Internal size: 370(L)x200(W)x230(H)MM
with built-in accessories:

DC To DC charger 25A

Battery capacity & Voltage display
200A power switch
USB Ports (USB-3.0 & Type C)
USB Ports (USB-3.0 x2)
12V Cigarette lighter socket x2
Terminal Post
Anderson Plug input/output 50Ax4
Anderson Alternator input
Anderson Solar input
Anderson plug 175A



Two charging modes:
Alternator and Solar input
Five battery types:
STO
GEL
AGM
CAL
LiFePO4

NEW



Coulombmeter
Console Readouts:
Voltage
Current
Impedance
Power
Running time
Capacity
SOC

Anderson Alternator input
Anderson Solar input
Anderson plug 175A

Anderson plug
50Ax4 with 50A overload
protection

Portable
Fixing belt
Bottom fixing
pallet(optional)



Portable Battery Box, with Power Accessories
Suit for most 100A battery, for battery size: 325*185*200mm
with High current bolt terminals & tie strap parts

16A 12V/24V Breaker switch to control the power accessories including:

SF NO.	Electrical components
SF50808-1P1P1U	2*cigarette socket+ 1*3.1A dual USB+1*Red-led Voltmeter
SF50808-1P1P1U-2V	2*cigarette socket+ 1*3.1A dual USB*12V segmental display voltmeter

Can change the electrical sockets with other sunfine sockets available
Extra fuse can be fixed onto the cover fro better protection of equipment




Portable Battery Box, with Power Accessories
Suit for most 100A battery, for battery size: 325*185*200mm
with High current bolt terminals & tie strap parts

16A 12V/24V Breaker switch to control the power accessories including:

SF NO.	Electrical components
SF50808S-2P2V2U	1*Blue-led cigarette socket+ 1*4.8A dual USB+1*12V segmental display voltmeter & 2*50A Anderson plug

Can change the electrical sockets with other sunfine sockets available
Extra fuse can be fixed onto the cover fro better protection of equipment
Can add extra Anderson plug & customized cable for connection.

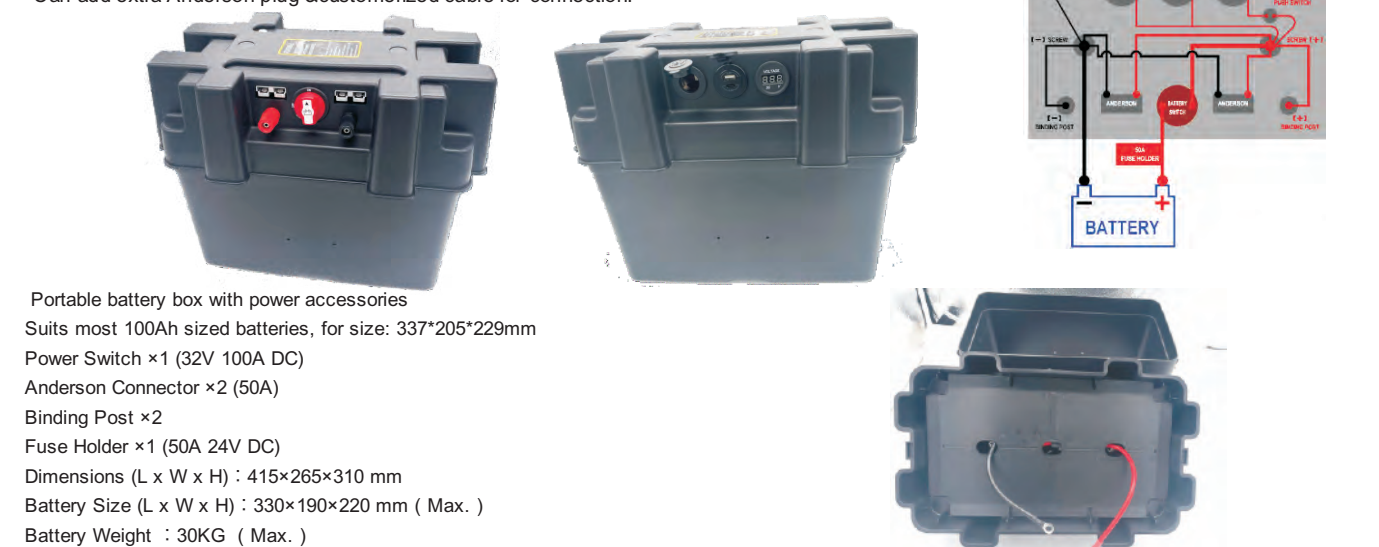

Portable battery box with power accessories
Suits most 100Ah sized batteries, for size: 337*205*229mm

Power Switch x1 (32V 100A DC)

Anderson Connector x2 (50A)

Binding Post x2

Fuse Holder x1 (50A 24V DC)

Dimensions (L x W x H) : 415*265*310 mm

Battery Size (L x W x H) : 330*190*220 mm (Max.)

Battery Weight : 30KG (Max.)

SF NO.	Electrical components
SF50838-1P1V12U	1* power socket+ 1* dual USB (2.4A+Type-C 2.4A)+1*Red-led Voltmeter

Can change the electrical sockets with other sunfine sockets available
Extra fuse can be fixed onto the cover fro better protection of equipment.



SF56001 LCD Digital Display Multimeter

Ammeter Voltmeter Watt Power Energy Meter
with 100A/75mV Shunt

Specification

Working Voltage: 6.5-100V/DC

Power Rating: 100A/10000W

Measuring Accuracy: 1.0 grade

Power Consumption: 0.2W

Measuring Speed: 2 times/s

Net Weight: 190g/0.42lb/6.70oz

Materials: LCD display + PC shell

Meter Dimensions: 9.0x5.0x2.4cm/3.5x2.0x0.9 in

Shunt Dimensions: 10.5x3.0x2.2cm/4.1x1.2x0.9 in

SF NO.	with Shunt
SF56001-1	/
SF56001-2	50A shunt
SF56001-3	100A shunt



LCD display multifunction battery tester

* Voltage

1.1.1 Measuring range: 0-200V.

(when < 8V, use the independent power supply mode)

* Current

1.2.1 Measuring range: 0-300A

can set 50A, 100A, 200A, 300A depend on the external shunt

1.3.1 Measuring range: 0-60000W

* Impedance

Impedance=Voltage/ Current

1.4.1 Measuring range: 0-1000Ω

*Internal Resistance

1.5.1 Measuring range: 0-999mΩ

* Capacity

1.6.1 Measuring range: 0-1000AH

SF NO.	with Shunt
SF56002-1	/
SF56002-2	50A shunt
SF56002-3	100A shunt
SF56002-4	200A shunt
SF56002-5	300A shunt



Voltage & battery type can be adjustable
to suit 12V/24V/36V/48V, Lead-acid batteries

LCD screen battery capacity voltage

*Display battery capacity and volt., the temp.

*Fahrenheit and Celsius temperature available

*Switch ON/OFF

Product size: 61.5*33.5*13.5mm

Installation dimension: 58.5*28.5mm

Display size: 33*16.5mm

Parameters:

Working Voltage: 10-100V

Power consumption: 8-10mA

Working temperature from -10°C to 55°C

Temperature testing range: 0-179°F

Working temperature: -10-65°C

Weight: 21g

SF NO.	Voltage	Remark
SF56003	12V/24/36/48V	Internal Temp.sensor
SF56003A	12V/24/36/48V	with alarm & outer temp. sensor



LCD screen battery capacity voltage

Features:

*Display battery capacity, voltage & temp. resetable

*Switch ON/OFF

Product size: 61.5*33.5*13.5mm

Installation dimension: 58.5*28.5mm

Display size: 36*19.5mm

Parameters:

Working Voltage: 10-100V


Power consumption: 5-6mA

Working temperature from -10°C to 55°C

Working temperature: -10-65°C

Weight: 21g

SF NO.	Voltage	Remark
SF56006	12V/24/36/48V	Internal Temp.sensor
SF56006A	12V/24/36/48V	with alarm & outer temp. sensor

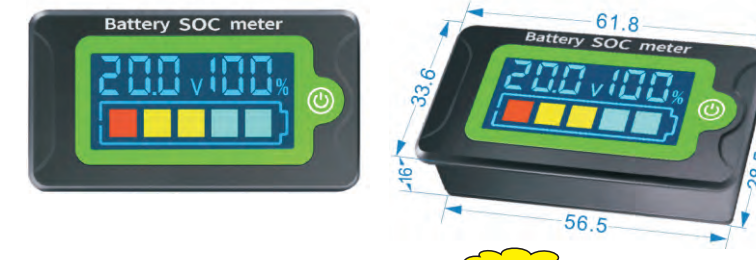

SF56020 Battery SOC meter

For Lithium iron phosphate battery and lithium ternary battery

Measuring range: DC8~100V, 0-100%

LCD screen display

Size: 61.8*33.6*16mm



Voltage & battery type can be adjustable
to suit 12V/24V/36V/48V, Lead-acid batteries

LCD screen battery capacity voltage

Features:

*Display battery capacity, voltage

Voltage: 8-65V

Product size: 58*25*11mm

Lead-acid & lithium batteries adjustable

SF NO.	Voltage	Backing light
SF56007	12V/24/36/48V	green


Blue/white backing light available



LCD screen battery capacity voltage

61*33*15mm

SF NO.	Voltmeter	Screen light color	with Alarm	With Temp. meter
SF51879-BV	8-100V	blue	/	/
SF51879-WV	8-100V	white	/	/
SF51879-BVA	8-100V	blue	yes	/
SF51879-WVA	8-100V	white	yes	/
SF51879-BVAT	8-100V	blue	yes	yes
SF51879-WVAT	8-100V	white	yes	yes

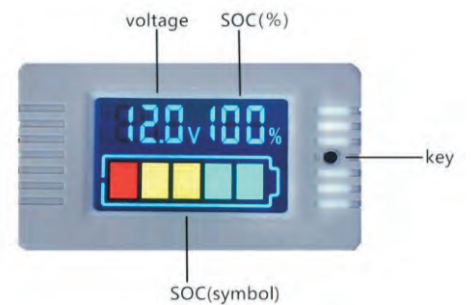


SF56004 Battery SOC meter

Measure battery SOC and display with LCD.

Display interface

Color LCD: Five cell battery symbol & voltage & percentage combination display

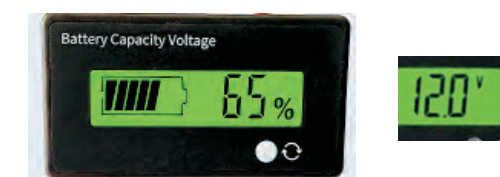

LCD screen battery capacity voltage

Features:

*Display battery capacity, voltage

Voltage: 10-100V

Product size: 61*33*13.5mm

Lead-acid & lithium batteries adjustable

SF NO.	Voltage	Backing light
SF56008	12V/24/36/48V	green

Blue/white backing light available



SF50878S DC Voltmeter

DC2.5-30V

Blue/green/red/orange led

35*23*20mm



LCD Voltmeter Waterproof

49.7*29.9*26.2mm, for Lead-acid battery

SF NO.	Voltmeter
SF51878-1	DC6~100V
SF51878-2	DC5~80V, waterproof



DC LED battery indicator

SF NO.	Input Volt	Size
SF50875-1	DC12V/24V	52x32x24mm
SF50875-2	DC12V/24V	52x32x24mm
SF50875-3	DC12V/24V, 36V, 48/72V	Φ60

DC LED Battery Indicator with Hour meter

SF NO.	Input Volt	Size	Max Display Hours	Memory Capacity
SF50876	DC12V/24V, 36V, 48/72V	Φ60	999999hours	CMOS EEPROM



SF50824 Hour Meter

Accumulating total working hours of engine
Range: 0-99999.9H
DC8-80V



SF50825 Hour Meter

Hour Range 0-9999.9H,
Voltage DC 12-36V (40V DC max)



SF50825-2 Hour Meter

Hour Range 0-99999.9H,
Voltage DC 8-80V (80V DC MAX), 50/60Hz



SF50828 Hour Meter with remote control


Accumulating total working hours of engine
Range: 0-99999.9H
DC12-36V



Battery Coulometer

Size: dia 59*20mm


SF code	Current
SF52334-1	8-120V 50A (0-75A)
SF52334-2	8-120V 100A (0-150A)
SF52334-3	8-120V 350A (0-500A)

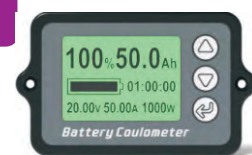

Battery Coulometer

Size: 66*40*13mm

SF code	Current
SF52332-1	8-120V 50A (0-75A)
SF52332-2	8-120V 100A (0-150A)
SF52332-3	8-120V 350A (0-500A)

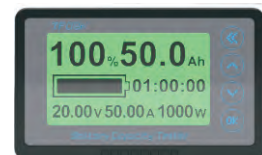

Battery capacity tester

Size: 100*61*17mm

SF code	Current
SF52333-1	8-120V 50A (0-75A)
SF52333-2	8-120V 100A (0-150A)
SF52333-3	8-120V 350A (0-500A)
SF52333-4	8-120V 500A (0-750A)



SF50821-2 Gasoline Tach Hour Meter



SF50821-1 Gasoline Tach Hour Meter

Waterproof RPM Indicator
Suit for all 2/4 stroke gasoline engine

SF50821-WP Tacho/Hour meter
self powered LCD hour meter, tachometer
and maintenance meter.

SF55240 Battery charger

AC input 220-240V 50HZ/100-120V60HZ
Power: 75W
Charging volt.: 14.4-14.8V
Charging current: 5A(6V)/5A(12V)

NEW



SF55241 Battery charger

AC input 220-240V 50HZ/100-120V60HZ
Rated output: 12V 8A, 24V 4A
Min. start voltage: 2.0v
Size: 170*98*58mm

NEW



SF55242 Battery charger

Continuous power: 200W
Peak Power 400W
Input: DC12V/24V
Output voltage: AC 220v-240V

NEW



SF55243 Battery charger

Voltage: 12V
Charging current: 90-120A Continuous, 160A peak
Cut-in voltage: 13.3V
Cut-out Voltage: 12.8V


NEW



SF55244 Battery charger

Voltage: 12V
Charging current: 90-120A Continuous, 160A peak
Cut-in voltage: 13.3V
Cut-out Voltage: 12.8V

NEW

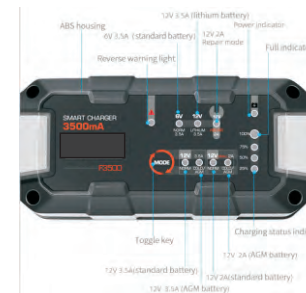

NEW

SF50555-8S1 8-stage battery charger

8-stage battery charger

Charging method : 1)pulse,2)soft start,3)constant current, 4)constant voltage,5)analysis,6)complement,7) floating charge,8)maintaining.

Battery charger/Battery maintenance

Charging current: 3.5A

Input voltage: AC110V/60Hz or 220V/50Hz

Output voltage: DC 6V / 12V switch by manually

Multiple battery can be chose mode

Protection: reverse connection, overheating protection, short circuit protection;overcharging protection

Can identify non-rechargeable batteries;

Battery type: lead-acid battery, Gel. AGM, Lifepo4.etc battery

Suitable for motorcycles, electric bicycles, cars, etc.

ideal for charging 6V/12V automotive lead acid batteries, 12V AGM, 12V

Lifepo4 with a capacity range between 60Ah

Accessories: manual+ battery clip cable +battery terminal cable



NEW

SF50555-8S3 8-stage battery charger

15A 8-stage battery charger

Charging method : 1)pulse,2)soft start,3)constant current, 4)constant voltage,5)analysis,6)complement,7) floating charge,8)maintaining.

Battery charger/Battery maintenance

Charging current: auto or by manual selection

6V mode 4A/8A/15A for selection

12V mode 4A/8A/15A for selection

24V mode 2A/4A/8A for selection

Input voltage: AC 220V/50Hz

Output voltage: DC 6V/12V/24V switch by manually

Multiple battery can be chose mode

Protection: reverse connection, overheating protection, short circuit protection;overcharging protection

Can identify non-rechargeable batteries;


Battery type: lead-acid battery, Gel.AGM, Lifepo4.etc battery

Suitable for motorcycles, electric bicycles, cars, etc.

ideal for charging 6V/12V/24V automotive lead acid batteries, AGM,

Lifepo4 with a capacity range between 150Ah

fan cooling

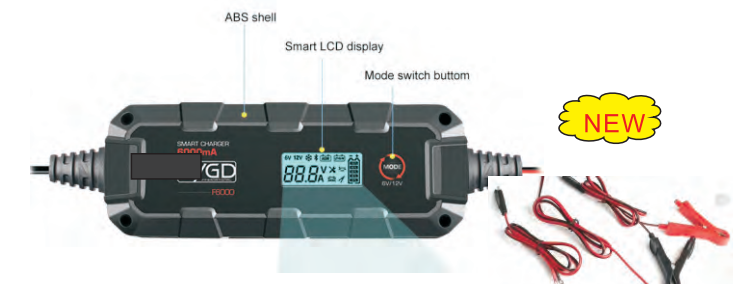

NEW

SF50555-8S2 8-stage battery charger

8-stage battery charger

Charging method : 1)pulse,2)soft start,3)constant current, 4)constant voltage,5)analysis,6)complement,7) floating charge,8)maintaining.

Battery charger/Battery maintenance

Charging current: 6.0A

Input voltage: AC110V/60Hz or 220V/50Hz

Output voltage: DC 6V / 12V switch by manually

Multiple battery can be chose mode

Protection: reverse connection, overheating protection, short circuit protection;overcharging protection

Can identify non-rechargeable batteries;

Battery type: lead-acid battery, Gel. AGM, Lifepo4.etc battery

Suitable for motorcycles, electric bicycles, cars, etc.

ideal for charging 6V/12V automotive lead acid batteries, 12V AGM, 12V

Lifepo4 with a capacity range between 100Ah

Accessories: manual+ battery clip cable +battery terminal cable



NEW

SF50555-8S4 8-stage battery charger

8-stage battery charger

Charging method : 1)pulse,2)soft start,3)constant current, 4)constant voltage,5)analysis,6)complement,7) floating charge,8)maintaining.

Battery charger/Battery maintenance

Charging current: auto or by manual selection

6V mode 4A/8A/15A for selection

12V mode 4A/12A/26A for selection

24V mode 2A/6A/13A for selection

With fast charging Max output current up to 75A

Input voltage: AC110V/60Hz or 220V/50Hz

Output voltage: DC 6V/12V/24V switch by manually

Multiple battery can be chose mode

USB port: 5V 2.1A Max*4

Protection: reverse connection, overheating protection, short circuit protection;overcharging protection

Can identify non-rechargeable batteries;

Battery type: lead-acid battery, Gel.AGM, Lifepo4.etc battery

Suitable for motorcycles, electric bicycles, cars, etc.

ideal for charging 6V/12V/24V automotive lead acid batteries, AGM,

Lifepo4 with a capacity range between 300Ah

Accessories: manual+ battery clip cable

PGC Standard battery charger

High Frequency working principle, small size, light weight and high efficiency

With reverse polarity protection

SF CODE	INPUT VOLT	OUTPUT CURRENT
SF50554-10A	12v or 24v or 48v	10A
SF50554-30A	12v or 24v	30A
SF50554-50A	12v	50A
SF50554L-10A	12v or 24v or 48v	10A, with led display screen
SF50554L-30A	12v or 24v	30A, with led display screen
SF50554L-50A	12v	50A, with led display screen

Battery Charger

AC Input Voltage:100V~120V / 220V~ 240V AC

Battery Rated Voltage:12V/24V

DC Output Voltage:13.6V-14.8V / 27.2-29.6V / 54.4-59.2V

Charge Mode:Constant Current; Constant Voltage;Float Charger

SF CODE	Voltage output	Max Output Current(A)	Dimension (Lx W x H)mm
SF50550-12 /24V	12V or 24V	10A	150x85x50
SF50551-12 /24V	12V or 24V	15A	190x135x85
SF50552-12 /24V	12V or 24V	20A	190x135x85
SF50553-12 /24V	12V or 24V	30A	210x135x85

Modified Sine Wave Inverter

Input voltage: DC12V/24V

Output voltage: AC100-120V AC220-240V


SF No.	Input volt	Rated Watt	Peak Power	USB output	Size mm
SF50350	12V or 24V	150W	300W	5V/2.1A	120*100*50
SF50351	12V or 24V	300W	600W	5V/2.1A	150*100*50
SF50352	12V or 24V	500W	1000W	5V/2.1A	150*100*50
SF50353	12V or 24V	600W	1200W	5V/2.1A	150*100*50
SF50354	12V or 24V	800W	1600W		210*150*70
SF50355	12V or 24V	1000W	2000W		323*139*72
SF50326	12V or 24V	2000W	4000W		405x199x73
SF50327	12V or 24V	2500W	5000W		405x199x73

Pure Sine Wave Inverter

Input voltage: DC12V/24V

Output voltage: AC100-120V AC220-240V

SF No.	Input volt	Rated Watt	Peak Power	Size / mm
SF50331	12V or 24V	300W	600W	200*118*62
SF50332	12V or 24V	500W	1000W	220*118*62
SF50333	12V or 24V	600W	1200W	235*118*62
SF50334	12V or 24V	800W	1600W	262*139*72
SF50335	12V or 24V	1000W	2000W	323*139*72
SF50336	12V or 24V	1500W	3000W	364*199*73
SF50337	12V or 24V	2000W	4000W	435*199*73
SF50338	12V or 24V	2500W	5000W	435*199*73
SF50339	12V or 24V	3000W	6000W	404*199*146

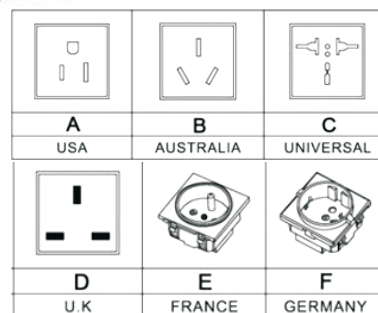

Foldable solar panle charger

SF NO.	Power	Output
SF53004-1	5W	5.5V,0.9A
SF53004-2	7W	5.5V, 1.4A
SF53004-3	10W	5.5V, 2A

SF53005 Foldable solar panle battery charger

- For 12V solar batteries
- voltage:18V
- Max output:660MA (under 30000LUX)
- Power : 12W max


SF53002 12V 8.5W Solar panle charger



Solar panel charger with mini fan
With USB2.0 port

Note: Fan is without battery, charging with solar panel

SF NO.	Working volt.	Solar panel	Fan
SF53010-1	5V/ 0.5A	2.5W	4"
SF53010-2	5V/2A	10W	8"

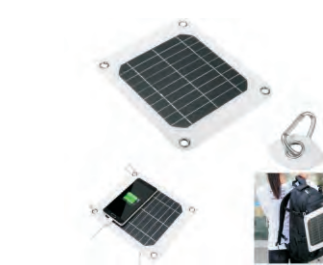

SF53003 5W Solar panle USB charger



SF53001 12V 4.5W Solar panle charger



Portable Panel Charger for Camping

SF CODE	Power	Output:
SF53025-36W	36W	QC3.0 USD+Type C+DC18V
SF53025-40W	40W	QC3.0 USD+Type C+DC18V
SF53025-50W	50W	QC3.0 USD+Type C+DC18V
SF53025-60W	60W	QC3.0 USD+Type C+DC18V



IPX6 Waterproof ETFE foldable solar panel charger

SF CODE	Power	Output:
SF53040-15W	15w	5v, 0-3A
SF53040-21W	21w	5v, 0-3A
SF53040-30W	30w	5v, 0-3A

Portable Panel Charger


SF CODE	Power	Output:
SF53024-6W	6W	5V/1A Max
SF53024-10W	10W	5V/2A Max
SF53024-21W	21W	QC3.0 USD+Type C+DC18V
SF53024-28W	28W	QC3.0 USD+Type C+DC18V



Semi-flexible solar panel


Suitable to be used on top of RV & Yacht.

SF CODE	Power (Pmax)(W)	Voc (V)	Isc (A)	Vmp (V)	Imp (A)	Solar Cell Type	Dimension (mm)
SF-SP100W	100W	24.19V	5.37A	20.50V	4.88A	MONO solar cell	850x710
SF-SP120W	120W	24.19V	6.44A	20.50V	5.85A	MONO solar cell	1170*590
SF-SP170W	170W	24.19V	9.12A	20.50V	8.29A	MONO solar cell	1372X686
SF-SP200W	200W	24.19V	10.73A	20.50V	9.76A	MONO solar cell	1585x710

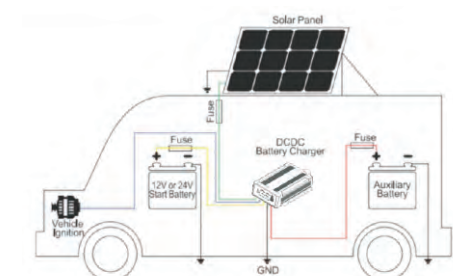



Two charging modes:
Automotive input
Solar input
Five battery types:
STD
GEL
AGM
CAL
LiFePO₄

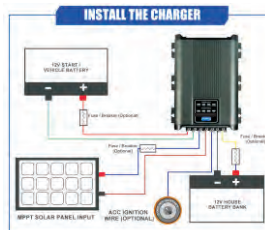

3 stage DC to DC battery charger

9-32V solar input voltage & vehicle input voltage


SF NO.	Max Input current:	Input Fuse Rating	Continuous current
SF55232-1	25A	40A	upto 25A
SF55232-2	40A	60~80A	Upto 25A-40A

12V DC TO DC battery charger with Solar Input MPPT Controller

For Lead Acid, Agm, Gel, Calcium, LiON Batteries,
Multiple Protection Design On-board Charger

SF No.	Soft Charge Current
SF55231-1	20A
SF55231-2	40A

Solar panels

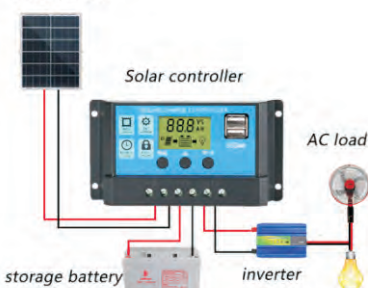

12/24V PWM Solar charge controller

LCD-display

Size:150*78*35mm, 150g

With dual port USB port

SF NO.	Rated current
SF53007 -1	10A
SF53007 -2	20A
SF53007 -3	30A

12V/24V solar charge controller

SF CODE	Charging current	discharge current
SF53023-1	30A	10A
SF53023-2	40A	10A
SF53023-3	50A	20A
SF53023-4	60A	20A
SF53023-5	80A	30A
SF53023-6	100A	30A

Solar charge controller

12V/24V, with dual USB port

SF NO.	Max charging current
SF53018-1	10A
SF53018-2	20A
SF53018-3	30A

SF53017-1

MPPT solar charge controller 10A

system voltage: 12 V

Max Solar Power: 150W

Max Solar Voc: 25V

Max.Charging current: 10A

SF53017-2

MPPT controller 20A

system voltage: 12/24V

Max Solar Voc: 50V

Max.Charging current: 20A

Max. Discharging current:20A



NEW

PWM Solar charge controller with USB
With anderson plugs

SF NO.	Rated current
SF53016-1	10A
SF53016-2	20A



NEW



cable with anderson plug

SF NO.	Max charging current
SF53019-1	5m*2.5sq.m.
SF53019-2	5m*4.0sq.m



SF53026 cable with anderson plug and alligator clip
0.3m cable length




SF50594 Cigarette Socket Lead with 50A Connector

SF50595 Double Cigarette Socket Lead with 50A Connector

SF50599 Power plug lead with 50A connector
Cable length 30cm



SF50591 50A connector with battery clamps
Cable length 30cm

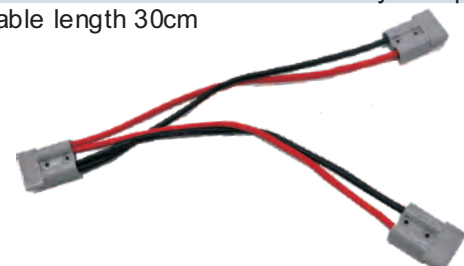


SF50592 50A connector leads with double connectors



SF51890

SAE Power Cable Y-Splitter, 12"

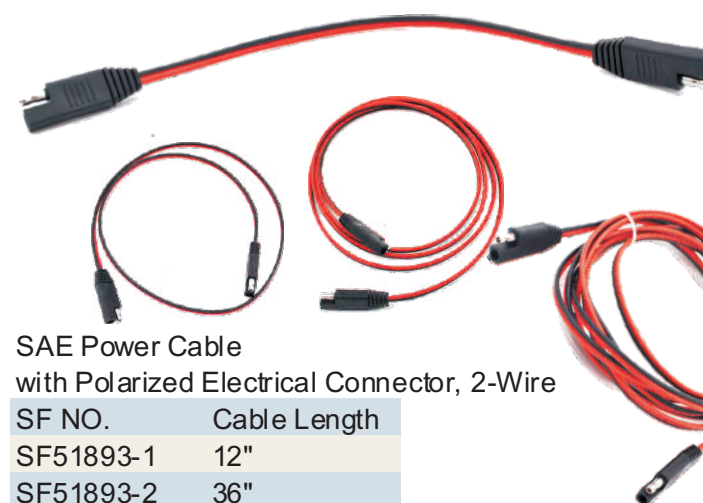

SAE Power Cable
with Polarized Electrical Connector, 2-Wire

SF NO.	Cable Length
SF51893-1	12"
SF51893-2	36"
SF51893-3	72"
SF51893-4	144"



SF50595




SF50596 50A connector leads with double connectors
Cable length 30cm



SF50598 50A connector with Solar panel PV plug&socket
Cable length 30cm



SF50593 50A connector with eye terminals

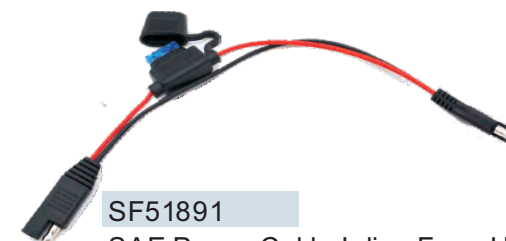

SF51891

SAE Power Cable Inline Fuse Holder, 12"



SF51892

SAE Power Plug, 2-Pack, 12"



Anti UV ABS Waterproof Solar Cable Entry Gland
SF51417-1W/1B Single port, white or black color
SF51417-2W/2B Dual ports, white or black color



SF51417W-7PCS 7pcs white solar panel mounting bracket set
SF51417B-7PCS 7pcs black solar panel mounting bracket set



SF51419 4pcs aluminum Z style bracket
Ideal for mounting solar panels to RV/Trailer/Boat, etc



SF51997 10pairs solar panel MC4 sockets&plugs



1000V/1500V MC4 solar extension cable
one end male, the other end female connector

SF NO.	volt. rate	cable size
SF51990-1kv-2.5	1000V	14AWG 1*2.5mm2
SF51990-1kv-4	1000V	12AWG 1*4mm2
SF51990-1kv-6	1000V	10AWG 1*6mm2
SF51990-1.5kv-2.5	1500V	14AWG 1*2.5mm2
SF51990-1.5kv-4	1500V	12AWG 1*4mm2
SF51990-1.5kv-6	1500V	10AWG 1*6mm2

customerized length

1000V/1500V MC4 solar extension cable
(only one end with connector, male or female)

SF NO.	volt. rate	cable size
SF51991-1kv-2.5	1000V	14AWG 1*2.5mm2
SF51991-1kv-4	1000V	12AWG 1*4mm2
SF51991-1kv-6	1000V	10AWG 1*6mm2
SF51991-1.5kv-2.5	1500V	14AWG 1*2.5mm2
SF51991-1.5kv-4	1500V	12AWG 1*4mm2
SF51991-1.5kv-6	1500V	10AWG 1*6mm2

customerized length



1000V/1500V MC4 Solar Panel Y-Cable 300mm

SF NO.	volt. rate	cable size	connectors
SF51992-1	1000V	12AWG 2*4mm2	2 Socket to 1 plug
SF51992-2	1500V	12AWG 2*4mm2	2 Socket to 1 plug
SF51992-3	1000V	12AWG 2*4mm2	2 Plug to 1 Socket
SF51992-4	1500V	12AWG 2*4mm2	2 Plug to 1 Socket



SF51994A/B 50A anderson connetor with solar MC4 plug&socket
Cable length 30cm



1500V MC4 solar connector cable

SF NO.	volt. rate	cable size	Length
SF51993-1.5kv-1M	1500V	12AWG 2*4mm2	1m
SF51993-1.5kv-2M	1500V	12AWG 2*4mm2	2m
SF51993-1.5kv-3M	1500V	12AWG 2*4mm2	3m
SF51993-1.5kv-4M	1500V	12AWG 2*4mm2	4m
SF51993-1.5kv-5M	1500V	12AWG 2*4mm2	5m



SF51995 8AWG solar MC4 plug&socket with eye connectors
Cable length 25cm

More customerized cables available:

SOLAR CABLE | MC4 Input



MC4 Female to 3xMale

SF53050-1



MC4 Male to 3xFemale

SF53050-2



MC4 Female to 4xMale

SF53050-3



MC4 Split Cable

SF53050-4

SOLAR CABLE | XT60 Input



XT60 to DC Male

SF53051-1



XT60 to DC Female

SF53051-2



XT60 to XT60

SF53051-3



XT60 to USB3.1 Type C

SF53051-4



XT60 to DC7909 Male

SF53051-5



XT60 to DC7909 Female

SF53051-6



XT60 to O-Ring

SF53051-7



XT60 to MC4

SF53051-8

SOLAR CABLE | XT60 Input



XT60 3 Way

SF53052-1



XT60 Split Cable

SF53052-2



XT60 Panel Mount

SF53052-3



XT90 Male to Female

SF53052-4



XT90 Panel Mount

SF53052-5

SOLAR CABLE | DC Input



DC7909 to MC4

SF53053-1



DC7909 to XT60

Sf53053 -2



DC5525 to Clip -A

SF53053-3



DC7909 to Clip

SF53053-4



DC7909 to Anderson Red

SF53053-5



DC7909 Male to Female - Fuse

Sf53053 -6



DC5525 to Clip -B

SF53053-7



DC5525 Socket to Clip

SF53053-8



DC Screwing Lock

SF53053-9



DC Tee Adapter

Sf53053 -10



DC Splitter Cable

SF53053-11

SOLAR CABLE | Anderson SB350 Input

NEW



Anderson to Clip

SF53054-1

Anderson to CNLinko

SF53054-2

Anderson to C14 Panel

SF53054-3

Anderson to O Ring

SF53054-4



Anderson to C13

SF53054-5

Anderson to C14 Blue

SF53054-6

Anderson to DC Male

SF53054-7

Anderson to DC Female

SF53054-8

SOLAR CABLE | Anderson SB350 Input

NEW



Anderson to C14+O Ring

SF53055-1

Anderson to Cigarette Socket

SF53055-2

Anderson to MC-4

SF53055-3

Anderson to C14 Male

SF53055-4

SOLAR CABLE | Anderson Red Input

NEW



Anderson Red to DC Female

SF53056-1

Anderson Red to DC Y Split

SF53056-2

Anderson Red to Open-Fuse

SF53056-3

Anderson Red to MC4

SF53056-4

SOLAR CABLE | EC Input

NEW



EC Male to Male

SF53057-1

EC to DC

SF53057-2

EC to SEA

SF53057-3

EC Panel Mount

SF53057-4

SOLAR CABLE | SAE Input

NEW



SAE to Clip

SF53058-1

SAE to O-Ring

SF53058-2

SAE to USB

SF53058-3

SOLAR CABLE | Car Cigarette Lighter

NEW



Cigarette Lighter to XT Plug

SF53059-1

Cigarette Lighter to XT - Fuse

SF53059-2

Cigarette Lighter to Anderson


SF53059-3

Cigarette Lighter to SEA

SF53059-4

NMEA2000 CONNECTORS&CABLES

NEW

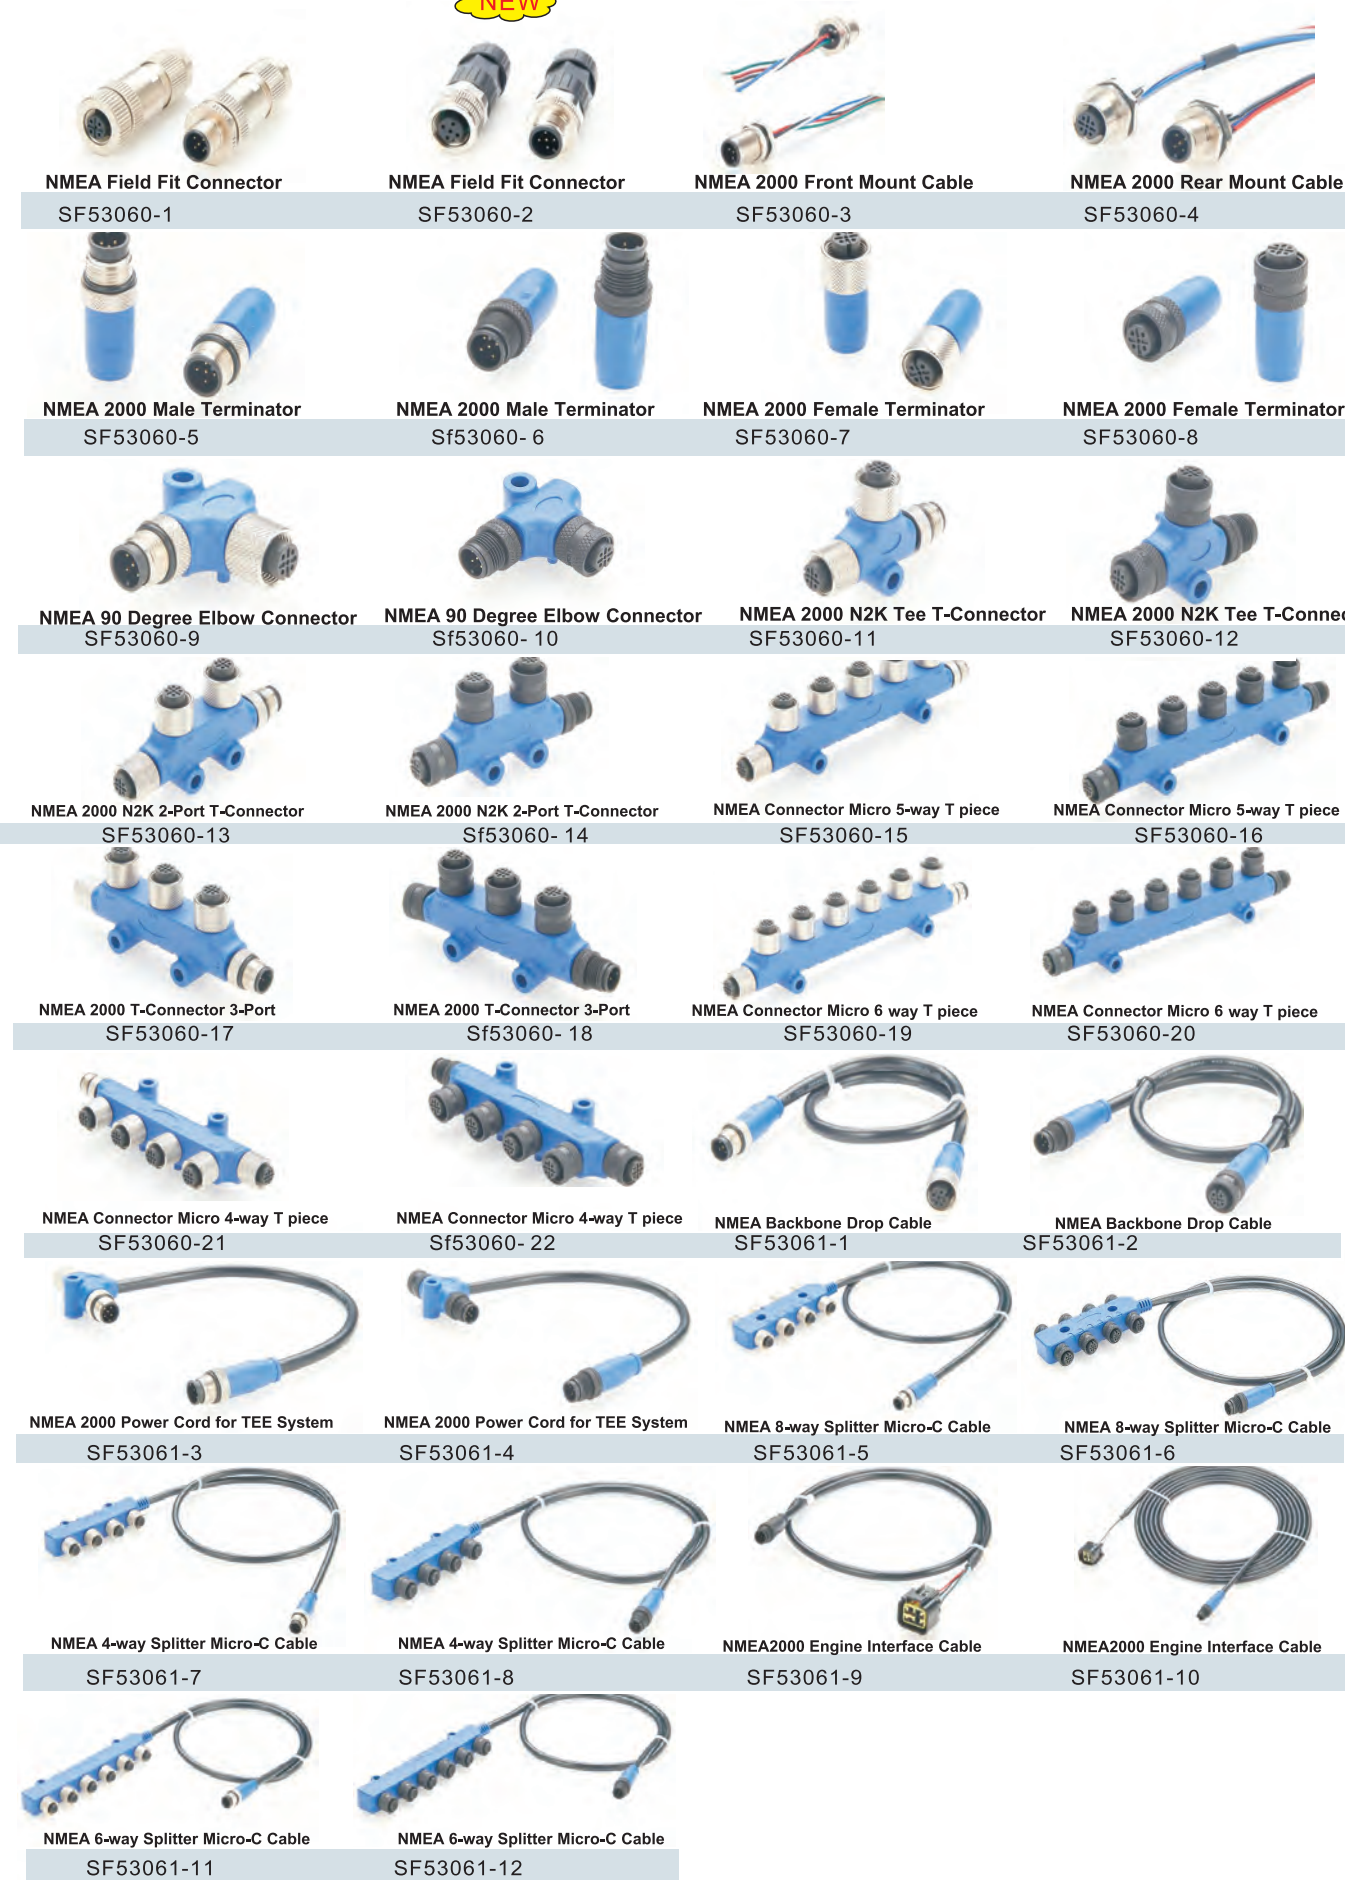

NMEA Field Fit Connector

SF53060-1

NMEA Field Fit Connector

SF53060-2

NMEA 2000 Front Mount Cable

SF53060-3

NMEA 2000 Rear Mount Cable

SF53060-4

NMEA 2000 Male Terminator

SF53060-5

NMEA 2000 Male Terminator

SF53060-6

NMEA 2000 Female Terminator

SF53060-7

NMEA 2000 Female Terminator

SF53060-8

NMEA 90 Degree Elbow Connector

SF53060-9

NMEA 90 Degree Elbow Connector

SF53060-10

NMEA 2000 N2K Tee T-Connector

SF53060-11

NMEA 2000 N2K Tee T-Connector

SF53060-12

NMEA 2000 N2K 2-Port T-Connector

SF53060-13

NMEA 2000 N2K 2-Port T-Connector

SF53060-14

NMEA Connector Micro 5-way T piece

SF53060-15

NMEA Connector Micro 5-way T piece

SF53060-16

NMEA 2000 T-Connector 3-Port

SF53060-17

NMEA 2000 T-Connector 3-Port

SF53060-18

NMEA Connector Micro 6 way T piece

SF53060-19

NMEA Connector Micro 6 way T piece

SF53060-20

NMEA Connector Micro 4-way T piece

SF53060-21

NMEA Connector Micro 4-way T piece

SF53060-22

NMEA Backbone Drop Cable

SF53061-1

NMEA Backbone Drop Cable

SF53061-2

NMEA 2000 Power Cord for TEE System

SF53061-3

NMEA 2000 Power Cord for TEE System

SF53061-4

NMEA 8-way Splitter Micro-C Cable

SF53061-5

NMEA 8-way Splitter Micro-C Cable

SF53061-6

NMEA 4-way Splitter Micro-C Cable

SF53061-7

NMEA 4-way Splitter Micro-C Cable

SF53061-8

NMEA2000 Engine Interface Cable

SF53061-9

NMEA2000 Engine Interface Cable

SF53061-10

NMEA 6-way Splitter Micro-C Cable

SF53061-11

NMEA 6-way Splitter Micro-C Cable

SF53061-12