

LED REAR LAMP


- ◆ LED Dynamic Turn Function
- ◆ LED Neon Effect Position Function
- ◆ Robust Housing Design
- ◆ Manufactured using latest L.E.D technology
- ◆ Fully Sealed to IP 67 Standards
- ◆ E-Mark Certificated Lighting



Z-T081 LED Combination Rear Lamp




Function	RPL	DI	ST	Reflex
Power Consumption (W)	2.5	2	2.5	--
LED Q'TY (PCS)	72	20	20	--
Compliance	R7	R6	R7	R3




YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)


Z-T071 LED Combination Rear Lamp




Function	RPL	DI	ST	Reflex
Power Consumption (W)	2.2	2.6	3.5	--
LED Q'TY (PCS)	72	29	45	--
Compliance	R7	R6	R7	R3



Z-T111 LED Combination Rear Lamp

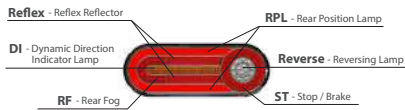


Function	RPL	DI	ST	Reverse	RF	Reflex
Power Consumption (W)	2	1.7	1.8	2	3.6	--
LED Q'TY (PCS)	68	14	33	13	13	--
Compliance	R7	R6	R7	R23	R38	R3



Z-T011 (RUBBER BRACKET) / Z-T012 (SCREWS) LED Multifunctional Rear Lamp



Function	RPL	DI	ST	Reverse
Power Consumption (W)	1	2.9	6.1	2.4
LED Q'TY (PCS)	21	6	21	4
Compliance	R7	R6	R7	R23




Z-T061 (Left) / Z-T062 (Right) LED Multifunctional Rear Lamp




Function	RPL	DI	ST	Reverse	RF	NPL
Power Consumption (W)	1	1.6	1	2.6	3	1.5
LED Q'TY (PCS)	24	14	16	8	16	4
Compliance	R7	R6	R7	R23	R38	R4

Reflex Compliance: R3




Z-T101 (Left) / Z-T102 (Right) LED Multifunctional Rear Lamp

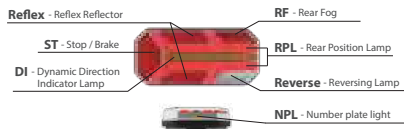


Function	RPL	DI	ST	Reverse	RF	NPL
Power Consumption (W)	1.7	2.4	2	4	4.8	1.5
LED Q'TY (PCS)	32	12	15	4	4	4
Compliance	R7	R6	R7	R23	R38	R4


Reflex Compliance: R3



Z-T021 (Left) / Z-T022 (Right) LED Multifunctional Rear Lamp

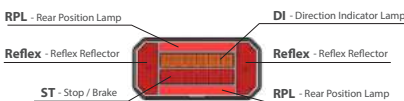


Function	RPL	DI	ST	Reflex
Power Consumption (W)	1.7	2.5	2.3	--
LED Q'TY (PCS)	12	6	6	--
Compliance	R7	R6	R7	R3



YTK CO.,LTD.
Http://www.ytk-group.co.jp



Z-T091 (Left) / Z-T092 (Right) LED Combination Rear Lamp



Function	RPL	DI	ST	Reverse ¹	RF	NPL
Power Consumption (W)	2.1	3	3.5	5	4.2	1.5
LED Q'TY (PCS)	28	8	10	8	10	4
Compliance	R7	R6	R7	R23	R38	R4

Reflex Compliance: R3



Z-T051 (Left) / Z-T052 (Right) LED Combination Rear Lamp

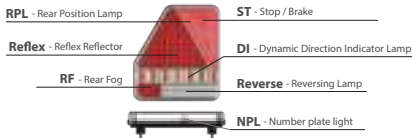

Function	RPL	DI	ST	Reverse ¹	RF	NPL
Power Consumption (W)	0.65	1.6	7.2	2.5	3.3	1.5
LED Q'TY (PCS)	39	14	39	14	6	4
Compliance	R7	R6	R7	R23	R38	R4

Reflex Compliance: R3

Z-T151 (Horizontal / Vertical) LED Multifunctional Rear Lamp

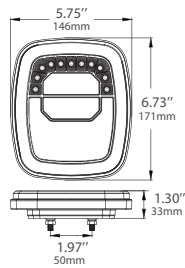
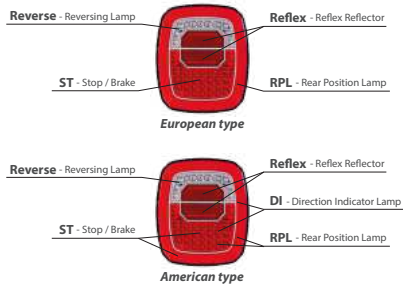


Function	European type				American type				
	RPL	ST	Reverse ¹	Reflex	RPL	DI	ST	Reverse ¹	Reflex
Power Consumption (W)	1	8.5	1.7	--	1	8.5	8.5	1.7	--
LED Q'TY (PCS)	48	32	11	--	80	80	11	--	--
Compliance	R7	R7	R23	R3	FMVSS 108				


LED Combination Rear Lamp



- Z-T26W - cable version
- Z-T26C - 7P connector version

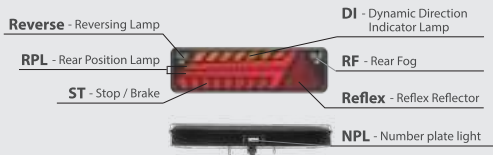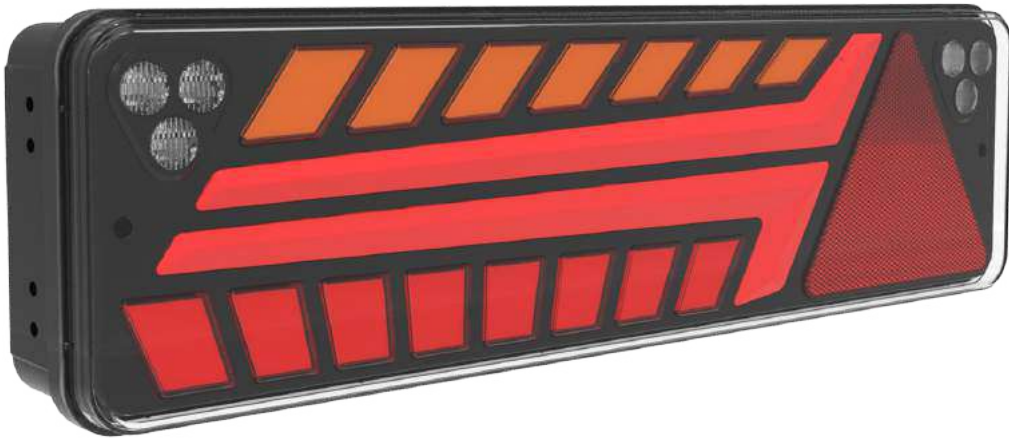



Two options for number plate light

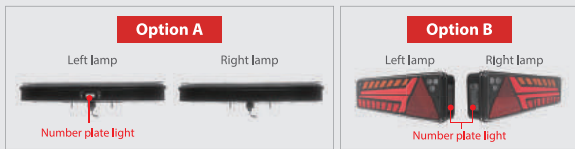


The left and right lamps can be used together with LED position lamps

Function	RPL	DI	ST	Reverse	RF	NPL
Power Consumption (W)	1.8	5	12	1.8	2	1.5
LED QTY (PCS)	78	84	96	3	3	4
Compliance	R7	R6	R7	R23	R38	R4

Reflex Compliance : R3

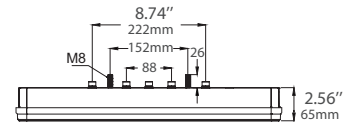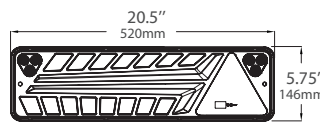

Z-T29 Series LED Multifunctional Rear Lamp




Z-T29A
RPL - Rear Position Lamp / **ST** - Stop / Brake



Z-T29B
RPL - Rear Position Lamp / **DI** - Direction Indicator Lamp




Z-T29C
RPL - Rear Position Lamp / **Reverse** - Reversing Lamp

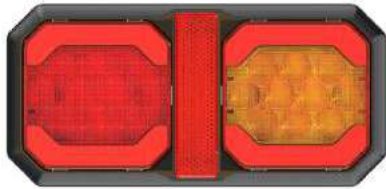




Z-T29D
RPL - Rear Position Lamp / **DI** - Dynamic Direction Lamp / **ST** - Stop / Brake / **Reflex** - Reflex Reflector



Z-T29E
RPL - Rear Position Lamp / **ST** - Stop / Brake / **Reverse** - Reversing Lamp / **Reflex** - Reflex Reflector

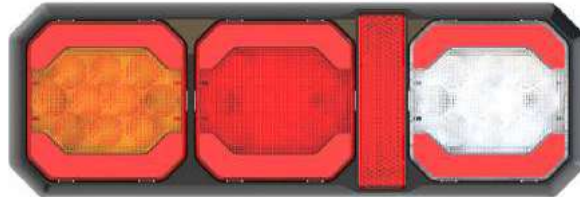

Z-T29F
RPL - Rear Position Lamp / **DI** - Dynamic Direction Lamp / **ST** - Stop Brake / **Reverse** - Reversing Lamp / **Reflex** - Reflex Reflector

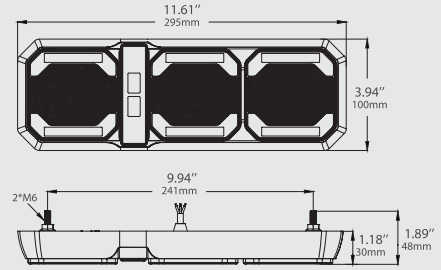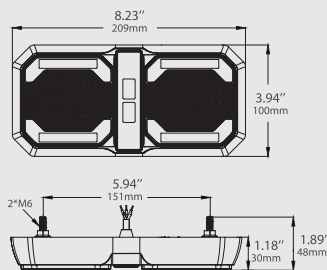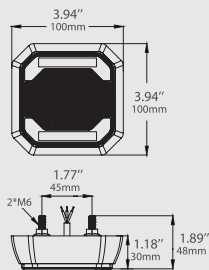



Function	Z-T29A		Z-T29B		Z-T29C		Z-T29D				Z-T29E				Z-T29F				
	RPL	ST	RPL	DI	RPL	Reverse	RPL	DI	ST	Reflex	RPL	DI	Reverse	Reflex	RPL	DI	ST	Reverse	Reflex
Power Consumption (W)	1	3.6	1	2	1	1.7	1	2	3.6	--	1	2	1.7	--	1	2	3.6	1.7	--
LED QTY (PCS)	16	10	16	10	16	10	16	10	10	--	16	10	10	--	16	10	10	10	--
Compliance	R7	R7	R7	R6	R7	R23	R7	R6	R7	R3	R7	R6	R23	R3	R7	R6	R7	R23	R3

LED ROUND MULTIFUNCTIONAL REAR LAMP

- ◆ LED Dynamic Turn Function
- ◆ LED Neon Effect Position Function
- ◆ Robust Housing Design
- ◆ Manufactured using latest L.E.D technology
- ◆ Fully Sealed to IP 67 Standards
- ◆ E-Mark Certificated Lighting



Z-T36L (Left) / Z-T36R (Right) 5.5" LED Hamburger Lamp

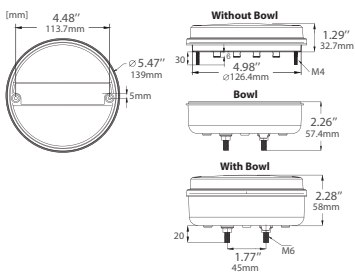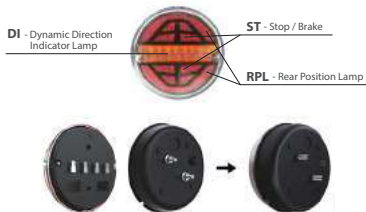


NEW




Function	RPL	DI	ST
Power Consumption (W)	1	2.8	4.1
LED QTY (PCS)	20	8	12
Compliance	R7	R6	R7

YTK CO.,LTD.
Http://www.ytk-group.co.jp


Z-T22 LED Multifunctional Rear Lamp




Function	RPL	DI	ST
Power Consumption (W)	2.5	2.5	4.5
LED Q'TY (PCS)	24	10	16
Compliance	R7	R6	R7



Z-T041 LED Round Multifunctional Rear Lamp




Function	RPL	DI	ST
Power Consumption (W)	2.5	3.5	6
LED Q'TY (PCS)	24	9	12
Compliance	R7	R6	R7



Z-T044 LED Round Multifunctional Rear Lamp





Function	RPL	DI	ST	Reverse
Power Consumption (W)	2.5	3.5	5.7	5.7
LED Q'TY (PCS)	24	9	6	6
Compliance	R7	R6	R7	R23



Z-T001 / Z-T002 / Z-T003



LED Round Multifunctional Rear Lamp

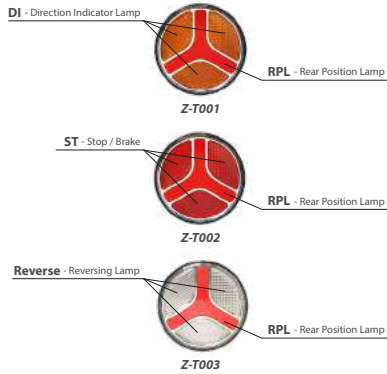

	Z-T001		Z-T002		Z-T003	
Function	RPL	DI	RPL	ST	RPL	Reverse
Power Consumption (W)	2	7	2	7	2	7
LED Q'TY (PCS)	15	114	15	114	15	114
Compliance	R7	R6	R7	R7	R7	R23

Z-T171 / Z-T172 / Z-T173

LED Out-line Marker Light

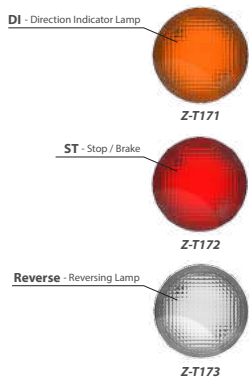

	Z-T171	Z-T172	Z-T173
Function	DI	ST	Reverse
Power Consumption (W)	5.6	5.6	5.6
LED Q'TY (PCS)	86	86	86
Compliance	R6	R7	R23


YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

Z-T30 Left / Z-T30 Right LED Multifunctional Rear Lamp



FlyEagle

DI - Dynamic Direction Indicator Lamp
RPL/ST - Rear Position Lamp / Stop




Function	RPL	DI	ST
Power Consumption (W)	0.5	2.1	3.1
LED Q'TY (PCS)	14	10	14
Compliance	R7	R6	R7

Z-T30 Series Removable LED Trailer Light Board



Function	RPL	DI	ST	Reflex	NPL
Power Consumption (W)	0.5	2.1	3.1	--	1.5
LED Q'TY (PCS)	14	10	14	--	4
Compliance	R7	R6	R7	R3	R4

	Z-T30-1200	Z-T30-1400	Z-T30-1800	Z-T30-2150	Z-T30-2450
A	1200mm 47.2"	1400mm 55.1"	1800mm 70.9"	2150mm 84.6"	2450mm 96.5"
B	143mm 5.6"	143mm 5.6"	143mm 5.6"	143mm 5.6"	143mm 5.6"
C	32mm 1.3"	32mm 1.3"	32mm 1.3"	32mm 1.3"	32mm 1.3"

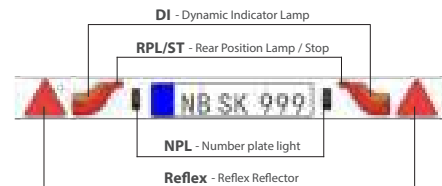

MAGNETIC WIRELESS TRAILER LIGHT KIT

Strong rubber coated magnets on lamps are used to secure the vehicle or trailer.
It can be used for 8 hours an full charge.


Three different options of Transmitter, can be used in Amrica, Europe, Australia and so on.



Packing box



Applications

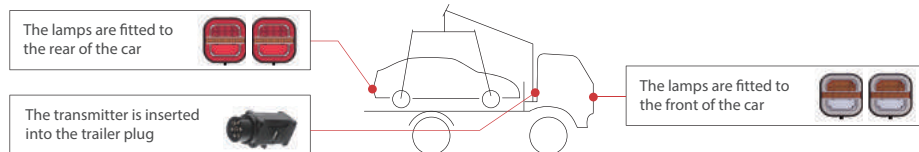

Applied in tractors, tugboats, EV, trailers, etc.

Four different options of transmitter



Z-TX01
European Round
(7Pins plug)



Z-TX51
European Round
Built-in Canbus
(7Pins plug)





Z-TX21
USA Round
(7Pins plug)



Z-TX11
Australian Flat
(7Pins plug)

YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)


Z-T28 Cable Type LED Multifunctional Front/Rear Lamp

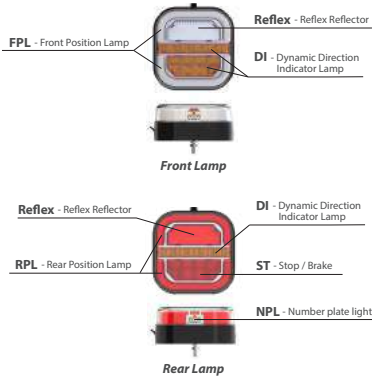


Function	Front Lamp			Rear Lamp				
	FPL	DI	Reflex	RPL	DI	ST	NPL	Reflex
Power Consumption (W)	1.2	3.2	--	2	3	1	0.5	--
LED QTY (PCS)	24	13	--	24	5	8	4	--
Compliance	R7	R6	R3	R7	R6	R7	R4	R3



Z-T28 Wireless Magnetic Wireless Trailer Light

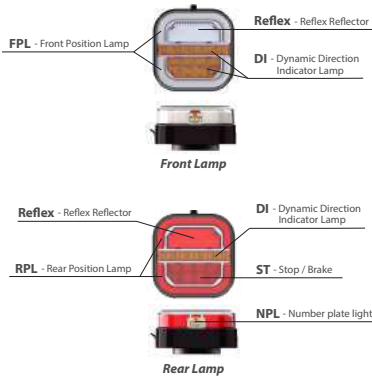



Charging time
About 2H
 Discharging time
8H



Function	Front Lamp			Rear Lamp				
	FPL	DI	Reflex	RPL	DI	ST	NPL	Reflex
Power Consumption (W)	1.2	3.2	--	2	3	1	0.5	--
LED QTY (PCS)	24	13	--	24	5	8	4	--
Compliance	R7	R6	R3	R7	R6	R7	R4	R3






Z-T032 (Left) / Z-T031 (Right) LED Multifunctional Front/Rear Lamp

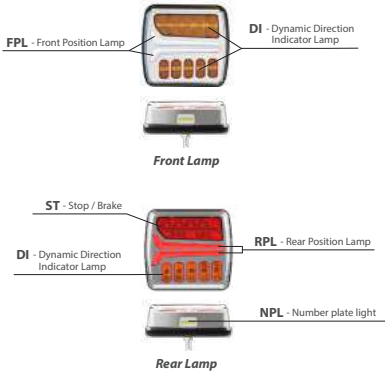

Function	Front Lamp			Rear Lamp				
	FPL	DI	Reflex	RPL	DI	ST	NPL	Reflex
Power Consumption (W)	4	3	--	5	2.6	2.3	1.5	--
LED Q'TY (PCS)	14	10	--	14	10	10	4	--
Compliance	R7	R6	R3	R7	R6	R7	R4	R3



Z-T033 Pair Magnetic Wireless Trailer Light


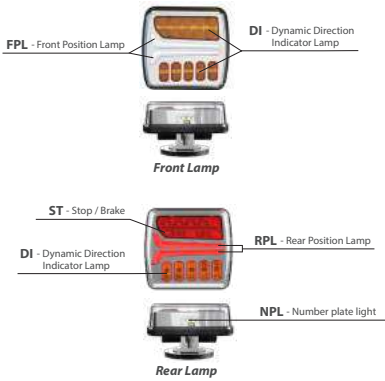


Function	Front Lamp			Rear Lamp				
	FPL	DI	Reflex	RPL	DI	ST	NPL	Reflex
Power Consumption (W)	4	3	--	5	2.6	2.3	1.5	--
LED Q'TY (PCS)	14	10	--	14	10	10	4	--
Compliance	R7	R6	R3	R7	R6	R7	R4	R3



YTK CO.,LTD.
Http://www.ytk-group.co.jp

Z-T43 Cable Type Plus-Triangle Wire Light Kits With Reflector





Function	RPL	DI	ST	RF	NPL
Power Consumption (W)	0.5	2.5	2.5	2.5	1
LED Q'TY (PCS)	12	12	12	2	6
Compliance	R7	R6	R7	R38	R4

Reflex Compliance : R3



Z-T43 Wireless Plus-Triangle Wireless Light Kits With Reflector, Strong Magnetic Suction Cup Installation



Function	RPL	DI	ST	RF	NPL
Power Consumption (W)	0.5	2.5	2.5	2.5	1
LED Q'TY (PCS)	12	12	12	2	6
Compliance	R7	R6	R7	R38	R4

Reflex Compliance : R3



Z-T212 Magnetic Wireless Trailer Light




RPL - Rear Position Lamp
① ② ③ ④ Red LED

DI - Direction Indicator Lamp
① ② ③ ④ Red LED

ST - Stop / Brake
① ② ③ ④ Red LED

Charging time
About 2H

Discharging time
8H



Function	RPL	DI	ST
Power Consumption (W)	0.28	0.4	0.8
LED QTY (PCS)	4	2	4
Compliance	FMVSS 108 FCC18		




Z-T30B FlyEagle Wireless Trailer Light Kit



Charging time
About 2H

Discharging time
8H



Function	RPL	DI	ST
Power Consumption (W)	0.5	2.1	3.1
LED QTY (PCS)	14	10	14
Compliance	R7	R6	R7



Z-TL01 7/13P EU&US Wire Harness Kit




American Round
(7 Pins plug)



European Round
(7 Pins plug)



European Round
(13 Pins plug)




Function introduction:

The power control system can provide power for the rear traction equipment and control the circuit of rear traction or carrying equipment. Its main function is to tow RV, trailer, beach motorcycle, bicycle, trunk, yacht and other facilities and equipment. With the power control system, whether it is brake control or signal light indication, the signal indicator at the rear of the traction device can keep synchronous with the circuit system of the tractor, and more safe for driving .




LED COMBINATION LAMP

Characterized by its attractive designs and low power consumption.
Wide range of applications, can be installed in the front or rear of the car.
Beautiful appearance, easy installation and use

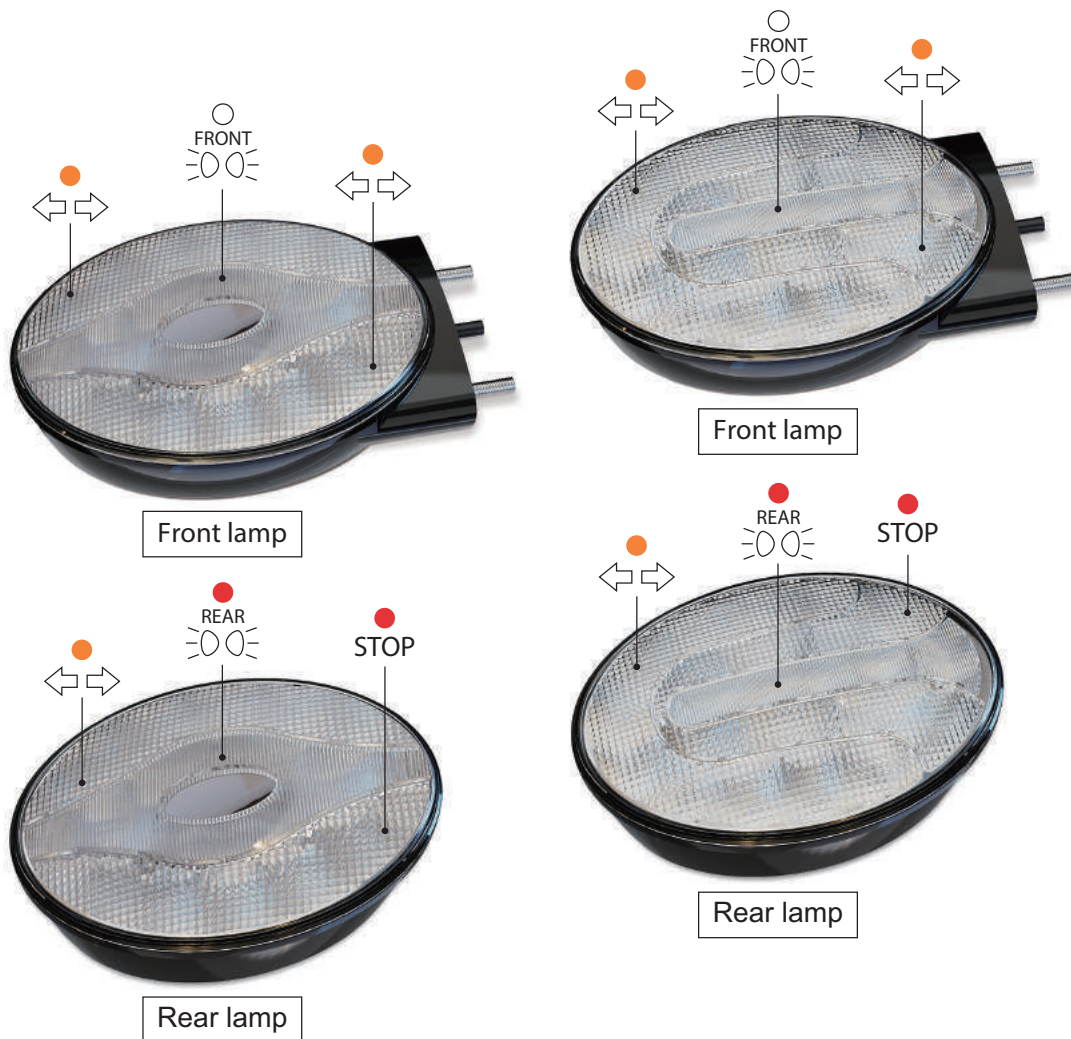

Z-T191 / Z-T193

LED Combination Front/Rear Lamp

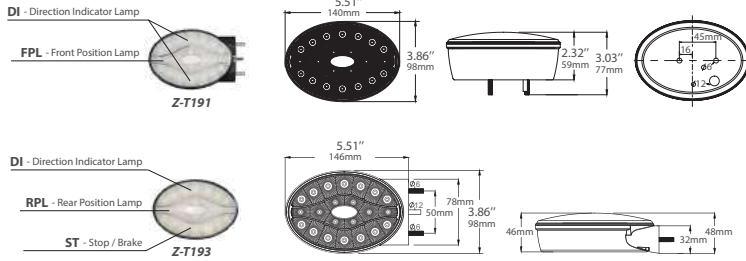

Function	Z-T191		Z-T193		
	FPL	DI	RPL	DI	ST
Power Consumption (W)	0.46	2.16	0.22	1.7	1.39
LED QTY (PCS)	8	14	8	7	7
Compliance	R7	R6	R7	R6	R7

Front Lamp




Rear Lamp



Z-T201 / Z-T203

LED Combination Front/Rear Lamp

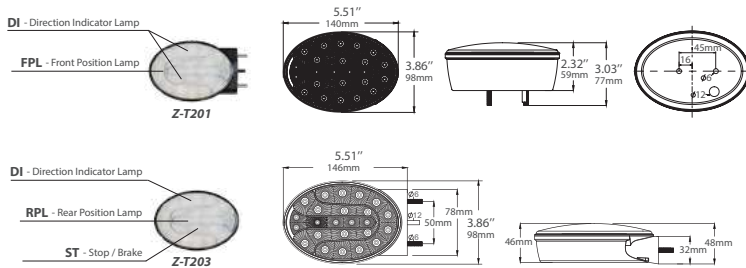

Function	Z-T201		Z-T203		
	FPL	DI	RPL	DI	ST
Power Consumption (W)	0.45	2.36	0.23	1.6	1.39
LED QTY (PCS)	6	18	6	8	10
Compliance	R7	R6	R7	R6	R7

Front Lamp



Rear Lamp



LED WARNING LAMP

◆ Construction & Automotive Vehicles


◆ Innovative Reflector Design

◆ **ECE R65 R10** Certified

◆ Pole, Magnetic & 1 Bolt Mount Available

◆ Suitable for Agricultural

◆ **SAE J845 CLASS1** Certified

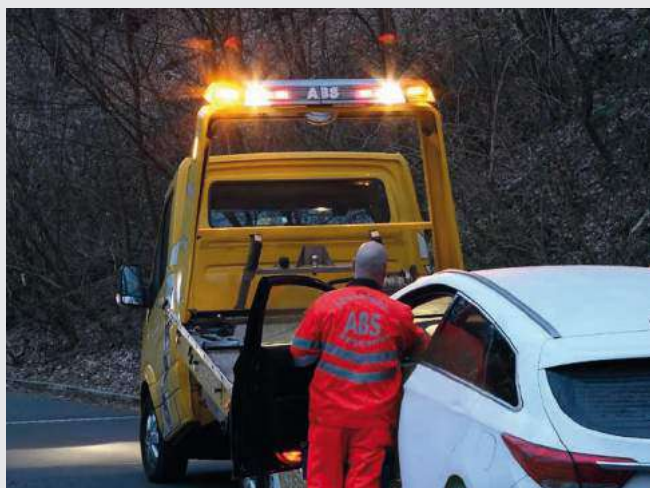

Z-W08B(Battery only) / Z-W08R(Battery and remote control) Magnetic Rechargeable Warning Lamp




Z-W08B LED beacon has unique LED reflectors provide a focused signal for superior brightness. Lens construction provides an excellent horizontal spread for easy identification of signal. ECE R65 and SAE J845 Approval. Including 3 flash patterns plus 4 rotation patterns provide plenty of signal options. Low amp draw and bright output provide the ideal beacon for everyday use.

Item No.	Z-W08B / Z-W08R
Input Voltage	12-24V
Power Consumption (W)	18
Current / Voltage	0.75A @ 24V
SMD	3535
LED Q'TY (PCS)	10
LED color	● ● ●
Modes	3 modes flash+4 modes rotation
Compliance	SAE J845 ECE R65 R10

Charging interface	DC 5.5/2.1
Electric core	Double section 18650 lithium ion
Capacity	7.4V 2600mAh
Charging voltage	12V/24V
Charging current	700mA(12V)/350mA(24V)
Charging time	About 3.5H
Discharging time	About 5H

Charging time
About 3.5H

Discharging time
About 5H



Z-W08S / Z-W08M / Z-W08P LED Warning Lamp



Z-W08S




Z-W08M



Z-W08P

Item No.	Z-W08S	Z-W08M	Z-W08P
Power Consumption (W)	18	25	25
Current / Voltage	0.75A @ 24V	1.04A @ 24V	1.04A @ 24V
LED Q'TY (PCS)	20	10	10
SMD	3030	3535	3535
Input Voltage	12-24V		
LED color	● ● ●		
Modes	3 modes flash+4 modes rotation		
Compliance	SAE J845 ECE R65 R10		

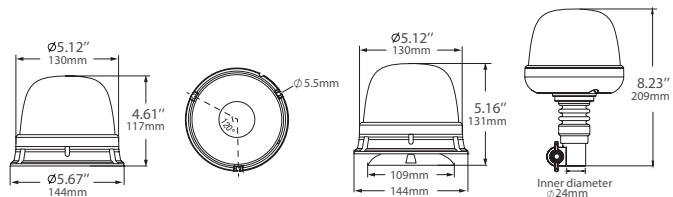


Z-W09B(Battery only) / Z-W09R(Battery and remote control)
Magnetic Rechargeable Warning Lamp



Item No.	Z-W09B / Z-W09R
Input Voltage	12-24V
Power Consumption (W)	18
Current / Voltage	0.75A @ 24V
SMD	3535
LED Q'TY (PCS)	10
LED color	● ● ●
Modes	3 modes flash+4 modes rotation
Compliance	SAE J845 ECE R65 R10

Charging time
About 3.5H

Discharging time
About 5H



Charging interface	DC 5.5/2.1
Electric core	Double section 18650 lithium ion
Capacity	7.4V 2600mAh
Charging voltage	12V/24V
Charging current	700mA(12V)/350mA(24V)
Charging time	About 3.5H
Discharging time	About 5H



Z-W09S / Z-W09M / Z-W09P
LED Warning Lamp



Z-W09S




Z-W09M



Z-W09P

Item No.	Z-W09S	Z-W09M	Z-W09P
Power Consumption (W)	18	25	25
Current / Voltage	0.75A @ 24V	1.04A @ 24V	1.04A @ 24V
LED Q'TY (PCS)	20	10	10
SMD	3030	3535	3535
Input Voltage	12-24V		
LED color	● ● ●		
Modes	3 modes flash+4 modes rotation		
Compliance	SAE J845 ECE R65 R10		

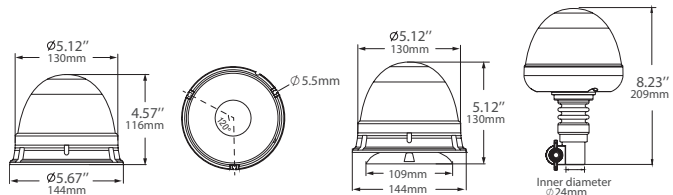


Z-W16B(Battery only) / Z-W16R(Battery and remote control) Magnetic Rechargeable Warning Lamp



Item No. Z-W16B / Z-W16R
 Input Voltage 12-24V
 Power Consumption (W) 14
 Current / Voltage 0.58A @ 24V
 SMD 3030
 LED Q'TY (PCS) 30
 LED color ●●●●
 Modes 3 modes flash+4 modes rotation
 Compliance CISPR 25 SAE J845 ECE R65 R10

Charging time
About 4H
 Discharging time
About 6.5H



Charging interface DC 5.5/2.1
 Electric core Double section 18650 lithium ion
 Capacity 7.4V 2600mAh
 Charging voltage 12V/24V
 Charging current 700mA(12V) / 350mA(24V)
 Charging time About 4H
 Discharging time About 6.5H



Z-W16S / Z-W16M / Z-W16P LED Warning Lamp



Z-W16S




Z-W16M



Z-W16P

Item No. Z-W16S / W16M / W16P
 Power Consumption (W) 19
 Current / Voltage 0.79A @ 24V
 LED Q'TY (PCS) 30
 SMD 3030
 Input Voltage 12V/24V
 LED color ●●●●
 Modes 3 modes flash+4 modes rotation
 Compliance CISPR 25 SAE J845 ECE R65 R10

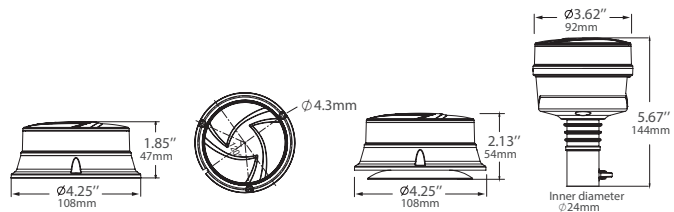


Z-W15B(Battery only) / Z-W15R(Battery and remote control) Magnetic Rechargeable Warning Lamp



Item No.	Z-W15B / Z-W15R
Input Voltage	12-24V
Power Consumption (W)	18
Current / Voltage	0.75A @ 24V
SMD	2835
LED Q'TY (PCS)	50
LED color	● ● ●
Modes	3 modes flash+4 modes rotation
Compliance	CISPR 25 SAE J845 ECE R65 R10

Charging time
About 3.5H
 Discharging time
About 5H



Charging interface	DC 5.5/2.1
Electric core	Double section 18650 lithium ion
Capacity	7.4V 2600mAh
Charging voltage	12V/24V
Charging current	700mA(12V)/350mA(24V)
Charging time	About 3.5H
Discharging time	About 5H



Z-W15S / Z-W15M / Z-W15P LED Warning Lamp



Z-W15S





Z-W15M



Z-W15P

Item No.	Z-W15S	Z-W15M	Z-W15P
Power Consumption (W)	25	25	25
Current / Voltage	1.04A @ 24V	1.04A @ 24V	1.04A @ 24V
LED Q'TY (PCS)	50	50	50
SMD	2835	2835	2835
Input Voltage	12-24V		
LED color	● ● ●		
Modes	3 modes flash+4 modes rotation		
Compliance	CISPR 25 SAE J845 ECE R65 R10		

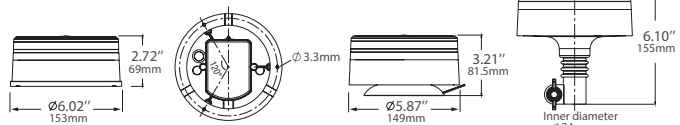

YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

Z-W135 / Z-W13M / Z-W13P LED Warning Lamp



ECE R65 Class 2



Light Sensation Beacon



Z-W135




Z-W13M



Z-W13P


Item No.	Z-W135	Z-W13M	Z-W13P
Power Consumption (W)	70	70	70
Current / Voltage	2.5A @ 24V	2.5A @ 24V	2.5A @ 24V
LED Q'TY (PCS)	20	20	20
SMD	3535	3535	3535
Input Voltage	12-24V		
LED color	● ● ●		
Modes	5 modes flash+2 modes rotation		
Compliance	CISPR 25 SAE J845 ECE R65 R10		

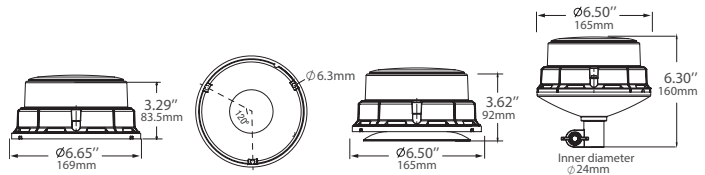

Z-W10 LED Warning Lamp



Item No.	Z-W10
Input Voltage	12-24V
Power Consumption	20W
Current / Voltage	0.83A @ 24V
SMD	2835
LED Q'TY	48
LED color	● ● ●
Modes	4 modes flash+4 modes rotation
Compliance	SAE J845 ECE R10

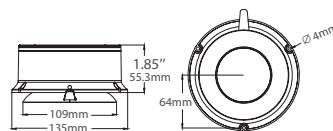

YTK CO.,LTD.
Http://www.ytk-group.co.jp

Z-W47S / Z-W47M / Z-W47P LED Warning Beacon



Z-W47S




Z-W47M



Z-W47P

Item No.	Z-W47S	Z-W47M	Z-W47P
Power Consumption (W)	16	16	16
Current / Voltage	0.67A @ 24V	0.67A @ 24V	0.67A @ 24V
LED Q'TY (PCS)	16	16	16
SMD	3030	3030	3030
Input Voltage	12-24V		
LED color	● ● ●		
Modes	3 modes flash+3 modes rotation		
Compliance	CISPR 25 SAE J845 ECE R65 R10		

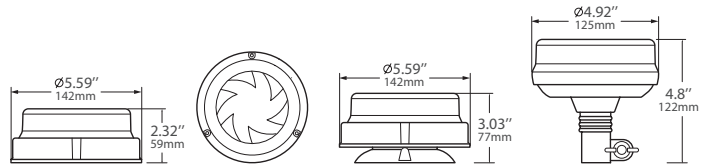

Beacons Light Mounting brackets

We designed three user-friendly mounting brackets for the user.

It allows you to install our products in many places you want to install, such as forklifts, excavators, motorcycles, fences, etc. The metal frame with ultra-low conductivity is used, which is not easy to be electrically shocked and has sufficient hardness. At the same time, the plug base can be rotated and disassembled.



MAGNETIC RECHARGEABLE WARNING LAMP

- ◆ **Strong Magnetic/Suction Cup Base**
- ◆ **Dual USB Charging Cable**
- ◆ **ECE R65 R10 Certified**
- ◆ **Vertical And Horizontal Mount Brackets**
- ◆ **With Cigarette Plug Adapter**
- ◆ **Once Full charge for 8 hours used**



Packing box




3 Mount Brackets




Lighting



Introduce

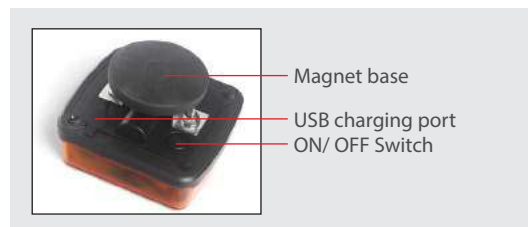

Z-W02 Magnetic Rechargeable Warning Lamp



Item No. Z-W02
 Input Voltage 12-24V
 Power Consumption 5W
 Current / Voltage 1.35A 2835
 SMD
 LED Q'TY 12
 LED color
 Modes Double Flash
 Compliance ECE R65 R10

Charging interface MICRO USB
 Electric core Single section 18650 lithium ion
 Capacity 3.7-4.2V 2600mAh
 Charging voltage 5V
 Charging current 1000mA
 Charging time About 3H
 Discharging time 8H

