

Rechargeable LED Warning Lights



WL400WB-SM

WL400WB-ST

DESCRIPTION

Light Source	3W high power LED
Function	8Flashing patterns
Battery	Lithium battery 18650,7.4V 4000MA
Charging time	3~4Hours
Discharging time	Single Flashing-2 Hours Dual Flashing-2 Hours Rotating-3 Hours
Lens Material	PC
Base Material	ABS
Waterproof	IP65
Working Temperature	-30 °C / +60 °C

APPLICATION



Temporary clearance Work




Temporary Concrete Work




Lifting Platform Vehicle




Temporary parking




Spring cable with European Cigar Plug & DC Plug 1Pcs



On/off switch Function switch



Battery status indicator



A power on/off

B function choice

Rechargeable LED Warning Lights

8
Flashing Patterns




WL400WB-SMB


WL400WB-STB

DESCRIPTION


Light Source	3W high power LED
Function	8Flashing patterns
Battery	Lithium battery 18650,7.4V 4000MA
Charging time	3~4Hours
Discharging time	Single Flashing-2 Hours Dual Flashing-2 Hours Rotating-3 Hours
Lens Material	PC
Base Material	ABS
Waterproof	IP65
Working Temperature	-30 °C / +60 °C




Spring cable with European Cigar Plug & DC Plug 1Pcs



On/off switch Function switch



Battery status indicator



A power on/off

B function choice

APPLICATION



Temporary clearance Work



Temporary Concrete Work



Lifting Platform Vehicle



Temporary parking

Rechargeable LED Warning Lights



WL400SWB-SM

WL400SWB-ST

DESCRIPTION

Light Source	0.5W high power LED
Function	8 Flashing patterns
Battery	Lithium battery 18650, 7.4V 4000MA
Charging time	3~4 Hours
Discharging time	Single Flashing-2 Hours Dual Flashing-2 Hours Rotating-3 Hours
Lens Material	PC
Base Material	ABS
Waterproof	IP65
Working Temperature	-30 °C / +60 °C

APPLICATION



Temporary clearance Work




Temporary Concrete Work




Lifting Platform Vehicle



Temporary parking



Spring cable with European Cigar Plug & DC Plug 1Pcs




On/off switch Function switch

Charger port

25% 50% 75% 100%

Battery status indicator



A power on/off

B function choice

Rechargeable LED Warning Lights

8
Flashing Patterns




WL400SWB-SMB


WL400SWB-STB

DESCRIPTION



Light Source	0.5W high power LED
Function	8Flashing patterns
Battery	Lithium battery 18650,7.4V 4000MA
Charging time	3~4Hours
Discharging time	Single Flashing-2 Hours Dual Flashing-2 Hours Rotating-3 Hours
Lens Material	PC
Base Material	ABS
Waterproof	IP65
Working Temperature	-30 °C / +60 °C



Spring cable with European Cigar Plug & DC Plug 1Pcs



On/off switch Function switch



APPLICATION



Temporary clearance Work



Temporary Concrete Work



Lifting Platform Vehicle



Temporary parking


Rechargeable LED Warning Lights




WL400HWB-SMB

DESCRIPTION


Light Source	3W high power LED
Function	8Flashing patterns
Battery	Lithium battery 18650,7.4V 4000MA
Charging time	3~4Hours
Discharging time	Single Flashing-2 Hours Dual Flashing-2 Hours Rotating-3 Hours
Lens Material	PC
Base Material	ABS
Waterproof	IP65
Working Temperature	-30 °C / +60 °C




Spring cable with European Cigar Plug & DC Plug 1Pcs



On/off switch Function switch



Battery status indicator



A power on/off
B function choice

APPLICATION



Temporary clearance Work



Temporary Concrete Work



Lifting Platform Vehicle



Temporary parking

Warning Lights



SAE

With Synchronization function



Description LED, Magnetic Base



AMERICAN MODEL



Description LED, Screw Base

WL839



Description XENON, Magnetic Base



AMERICAN MODEL



Description XENON, Screw Base

WL839X

DESCRIPTION

Function	36kind of flashing patterns with Synchronization function
Voltage	12-24 VDC
Lens Material	PC
Base Material	Aluminium
Waterproof	IP65
Operating Temperature	-30 °C ~ +60 °C

YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)



Warning Lights



SAE

With Synchronization function



Description LED, Magnetic Base



AMERICAN MODEL



Description LED, Screw Base

WL840



Description XENON, Magnetic Base



AMERICAN MODEL



Description XENON, Screw Base

WL840X

DESCRIPTION

Function	36kind of flashing patterns with Synchronization function
Voltage	12-24 VDC
Lens Material	PC
Base Material	Aluminium
Waterproof	IP65
Operating Temperature	-30 °C ~ +60 °C

YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)



Warning Lights



SAE

With Synchronization function



Description LED, Magnetic Base



AMERICAN MODEL



Description LED, Screw Base

WL841



Description XENON, Magnetic Base



AMERICAN MODEL



Description XENON, Screw Base

WL841X

DESCRIPTION

Function	36kind of flashing patterns with Synchronization function
Voltage	12-24 VDC
Lens Material	PC
Base Material	Aluminium
Waterproof	IP65
Operating Temperature	-30 °C ~ +60 °C

YTK CO.,LTD.
Http://www.ytk-group.co.jp



LED Warning Light



Input Voltage
DC12-24V



Light Source
High Power LED



Function
Flashing / Rotating



Lens Material
PC



Lens Colors
Amber, Red, Blue, Green, Clear



Base Material
ABS



Waterproof
IP65



Working Temperature
-30 °C ~ +60 °C



Approvals
ECE R10 R65



45 LED

SAE J845-AUG 2021



WL470-V
With screw base type



WL471-V
With magnet and cable



WL472-V
With single bolt base



WL473-V
With flexible DIN base



WL474-V
With single bolt base



WL475-V
With magnet and cable



WL476-V
With Quick Fix Din Mount Base



WL477-V
With flexible DIN base



WL477-DL-V
With flexible DIN base



WL478-V
With flexible DIN base



WL479-V
With DIN base



WL480-V
With flexible DIN base



WL473LP-V
With Quick Fix Din Mount Base

CLASS 5
IEC CISPR25-2016



LED Warning Light



Input Voltage
DC12-24V



Light Source
High Power LED



Function
Flashing / Rotating



Lens Material
PC



Lens Colors
Amber, Red, Blue, Green, Clear



Base Material
ABS



Waterproof
IP65



Working Temperature
-30 °C ~ +60 °C



Approvals
ECE R10 R65



8 LED

SAE J845-AUG 2021



WL440-V
With screw base type



WL441-V
With magnet and cable



WL442-V
With single bolt base



WL443-V
With flexible DIN base



WL444-V
With single bolt base



WL445-V
With magnet and cable



WL446-V
With Quick Fix Din Mount Base



WL447-V
With flexible DIN base



WL447-DL-V
With flexible DIN base



WL448-V
With flexible DIN base



WL449-V
With DIN base



WL450-V
With flexible DIN base



WL443LP-V
With Quick Fix Din Mount Base

CLASS 5
IEC CISPR25-2016



LED Warning Light



Input Voltage
DC12-24V



Light Source
High Power LED



Function
Single Flashing,
Dual Flashing,
Rotating



Working Temperature
-30 °C ~ +60 °C



Lens Material
PC



Base Material
ABS



Waterproof
IP65

45 LED



WL04S

Description LED, Magnetic Base



YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)



LED Warning Light



Input Voltage
DC12-24V



Light Source
High Power LED



Function
Single Flashing,
Dual Flashing,
Rotating



Working Temperature
-30 °C ~ +60 °C



Lens Material
PC



Base Material
ABS



Waterproof
IP65

12 LED



WLO4H

Description LED,Magnetic Base



Green&Amber LED Warning Light



Amber/Green



WL400S-DC



WL431S-DC




WL430S-DC



WL401S-DC

Remote Control

- A** Power on/off
 - B** Function choice
- | | |
|-----------------------------------|------------------------------|
|
0.5 Sec x1
Function |
3 Sec x1
Color |
|-----------------------------------|------------------------------|



DESCRIPTION

- Input Voltage**
DC12-24V
- Light Source**
SMD2835 ,45Pcs
- Function**
Single Flashing, Dual Flashing, Rotating
- Lens Material**
PC
- Base Material**
ABS
- Waterproof**
IP65
- Working Temperature**
-30 °C ~ +60 °C

YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)



Double Color LED Warning Light

TA2

E9*65R00/10*6515*00



R10

LED



Amber/Green



WL400H-DC



WL431H-DC



WL430H-DC



WL401H-DC

DESCRIPTION



Input Voltage

DC12-24V



Light Source

SMD3535 3W LED , 24pcs



Function

Single Flashing, Dual Flashing, Rotating



Lens Material

PC



Base Material

ABS



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C



YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

Green&Amber LED Warning Light



Amber/Green



R10

LED



WL400-DC



WL431-DC



WL430-DC



WL401-DC

Remote Control

A

Power on/off




Function



Color

B

Function choice



DESCRIPTION



Input Voltage

DC12-24V



Light Source

SMD3535 3W LED ,12pcs



Function

Single Flashing, Dual Flashing, Rotating



Lens Material

PC



Base Material

ABS



Waterproof


IP65



Working Temperature

-30 °C ~ +60 °C

YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

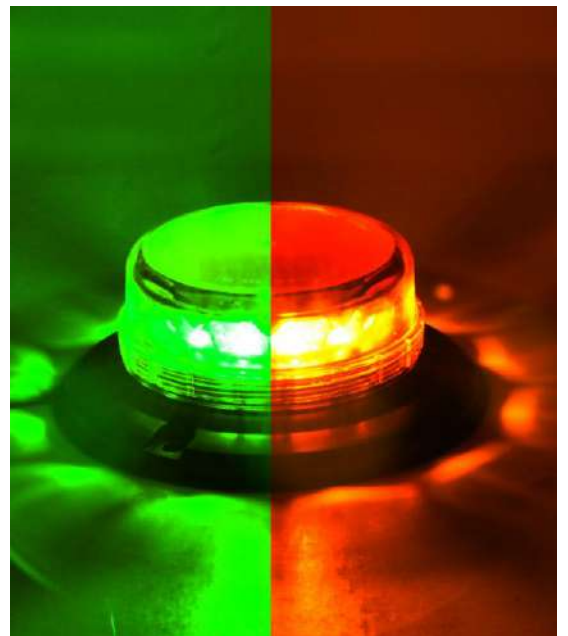

Four Color LED Warning Light



WL400-FC

with Ultrathin design 3 bolt Aluminium base



WL431-FC

with magnet base



WL430-FC

Ultrathin design, Aluminium base, with magnet base



WL401-FC

with flexible DIN base

DESCRIPTION



Input Voltage

DC12-24V



Light Source

SMD3535 3W LED , 12pcs



Function

Single Flashing, Dual Flashing, Rotating



Lens Material

PC



Base Material

ABS






Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C



YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

Four Color LED Warning Light



Amber
Green
White
Amber



WL701-FC-MC

Description LED, Magnetic Base



WL701-FC-SC

Description LED, Screw Base

DESCRIPTION



Input Voltage

DC12-24V



Light Source

High power LED



Function

36 Kind of Flashing Patterns



Lens Material

PC



Base Material

Aluminium



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C

YTK CO.,LTD.

[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)



Four Color LED Warning Light



Amber
Green
White
Amber



WL842-FC

Description LED, Magnetic Base



WL842-FC

Description LED, Screw Base

DESCRIPTION



Input Voltage

DC12-24V



Light Source

High power LED



Function

36 Kind of Flashing Patterns



Lens Material

PC



Base Material

Aluminium



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C

YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)



Four Color LED Warning Light



Amber
Green
White
Amber



WL700-FC-MC

Description LED, Magnetic Base



WL700-FC-SC

Description LED, Screw Base

DESCRIPTION



Input Voltage

DC12-24V



Light Source

High power LED



Function

36 Kind of Flashing Patterns



Lens Material

PC



Base Material

Aluminium



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C

YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)



Double Color LED Warning Light



Red/Green



WL701DC-MC

Description LED, Magnetic Base



WL701DC-SC

Description LED, Screw Base



White/Amber



WL700DC-MC

Description LED, Magnetic Base



WL700DC-SC

Description LED, Screw Base



White/Blue

DESCRIPTION



Input Voltage

DC12-24V



Light Source

High power LED



Function

Two Color Flashes Individually
Two Color Flashing Individually



Lens Material

PC



Base Material

ABS



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C



YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

Double Color LED Warning Light



Red/Green



White/Amber



White/Blue



R10

LED



Screw Base



Magnetic Base

WL205-DC

DESCRIPTION



Input Voltage

DC12-24V



Light Source

High power LED



Function

Two Color Flashes Individually
Two Color Flashing Individually



Lens Material

PC



Base Material

ABS



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C



YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

Double Color LED Warning Light



Red/Green



White/Amber



White/Blue



Wire Outlet

WL29-DC

DESCRIPTION



Input Voltage

DC12-24V



Light Source

High power LED



Function

Two Color Flashes Individually
Two Color Flashing Individually



Lens Material

PC



Base Material

ABS



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C



YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

Double Color LED Warning Light



Red/Green



White/Amber



White/Blue



WL61-DC



R10

LED



Magnetic Base

Screw Base

DESCRIPTION



Input Voltage

DC12-24V



Light Source

High power LED



Function

Two Color Flashes Individually
Two Color Flashing Individually



Lens Material

PC



Base Material

ABS



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C



YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

Double Color LED Warning Light



Red/Green




White/Amber



White/Blue



WL247-DC

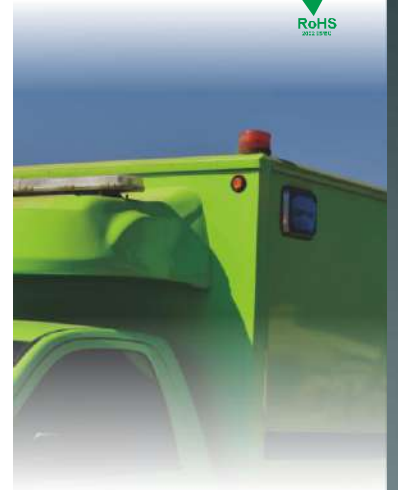

Magnetic Base



Screw Base

DESCRIPTION



Input Voltage

DC12-24V



Light Source

High power LED



Function

Two Color Flashes Individually
Two Color Flashing Individually



Lens Material

PC



Base Material

ABS



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C



YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

Double Color LED Warning Light



Red/Green



White/Amber



White/Blue



R10

LED



WL69-DC



Magnetic Base



Screw Base

DESCRIPTION



Input Voltage

DC12-24V



Light Source

High power LED



Function

Two Color Flashes Individually
Two Color Flashing Individually



Lens Material

PC



Base Material

ABS



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C



YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)