

ISO 9001
REGISTERED

1.0 DESCRIPTION

Accuracy: $\pm 0.5\%$ of full scale ($\pm 1\%$ F.S full scale for $-1 \sim 0$ bar to $0 \sim 2.5$ bar only)

Range: refer to the Measure Range Table

Power supply: 11 to 30 volts DC

Output signal: 4-20mA, 2 wire

EMC compatibility: 80MHz - 1GHz

Operature temperature: -10°C to $+80^{\circ}\text{C}$


Conduit connection: M12 & Mini DIN Connectors, plastic

Material of wetted parts: SS316 or SS304

Process connections: $\frac{1}{4}$ " NPT Male



2.0 CONNECTION

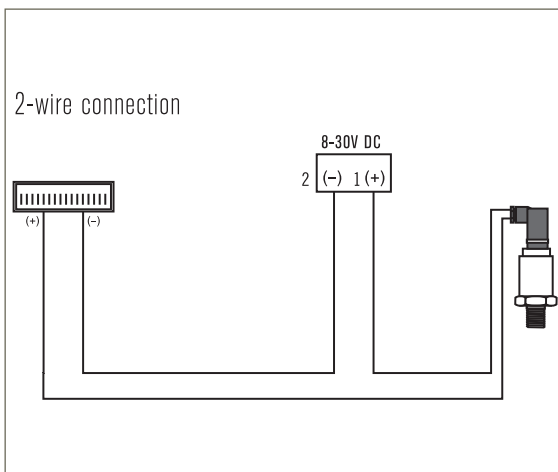

3.0 CONNECTION DIMENSION

