



AIR DUCT

研发销售生产各种高温风管

R & D, sales and production of various high temperature air ducts

☑高温风管 ☑尼龙布风管 ☑伸缩软管 ☑夹式伸缩风管 ☑复合软管 ☑过料软管


YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

株式会社YTK
〒556-0011 大阪市浪速区難波中 2 - 1 0 - 7 0 難波パークスタワー 1 9 F
〒556-0011 NAMBA PARKS 19F, 2-10-70 Nambanaka, Naniwa-ku, Osaka-shi, Osaka
TEL : 06-7662-8687 FAX:06-6777-7941

株式会社YTK 平野配送センター :
〒547-0004 大阪府大阪市平野区加美鞍作 1 丁目 1 0 番 1 2 号
1-10-12, Kamikuratsukuri, Hirano-ku Osaka-shi, Osaka, 547-0004, Japan
TEL:06-6777-7463 FAX:06-6777-7941

OVERLOOKING
HOSE TECHNOLOGY

尽览软管科技



YTK -GROUP

产品目录 / PRODUCT LIST

- 

P07 红 / 黑色阻燃高温硫化管
RED/BLACK FLAME RETARDANT HIGH TEMPERATURE VULCANIZED TUBE
- 

P08 红 / 黑色硅胶高温风管
RED/BLACK SILICONE HIGH TEMPERATURE AIR DUCT
- 

P09 加强高温单线软管
STRENGTHEN HIGH-TEMPERATURE SINGLE-LINE HOSE
- 

P10 高温加厚负压风管
HIGH TEMPERATURE SOFT CONNECTION THICKENED NEGATIVE PRESSURE AIR DUCT
高温软接风管 HIGH TEMPERATURE FLEXIBLE DUCT
- 

P11 高温保温风管
HIGH TEMPERATURE INSULATION AIR DUCT
- 

P12 高温软接保温风管
HIGH TEMPERATURE SOFT JOINT INSULATION DUCT
- 

P13 耐温 450 度夹式加厚保温风管
HEAT-RESISTANT 450 DEGREE CLIP-TYPE THICKENED HEAT-INSULATING AIR DUCT
- 

P14 耐磨高温保温软管
HIGH TEMPERATURE SOFT JOINT INSULATION DUCT
- 

P15 304 不锈钢波纹管 / 加厚铝管
304 STAINLESS STEEL CORRUGATED PIPE/THICKENED ALUMINUM PIPE
- 

P16 加强尼龙布风管
REINFORCED NYLON CLOTH DUCT
- 

P17 尼龙网布风管
NYLON MESH DUCT
- 

P18 PVC 多用途伸缩软管
PVC MULTI-PURPOSE TELESCOPIC HOSE
- 

P19 PVC 多用途负压软管
PVC MULTI-PURPOSE TELESCOPIC HOSE
- 

P20 养殖业专用多用途伸缩软管
MULTI-PURPOSE TELESCOPIC HOSE FOR AQUACULTURE
- 

P21 多用途保温加厚伸缩软管
MULTI-PURPOSE THERMAL INSULATION THICKENED TELESCOPIC HOSE
- 

P22 多用途无骨架正压软管
MULTI-PURPOSE NON-SKELETON POSITIVE PRESSURE HOSE
异型软接风管 SPECIAL-SHAPED FLEXIBLE DUCT
- 

P23 耐温 800 度伸缩风管
800 DEGREE TEMPERATURE RESISTANT TELESCOPIC DUCT
- 

P24 耐温 450 度伸缩风管
TEMPERATURE RESISTANT 450 DEGREES TELESCOPIC DUCT
- 

P25 三防布伸缩软管
THREE-PROOF CLOTH TELESCOPIC HOSE
- 

P26 耐高温夹式保温伸缩软管
HIGH TEMPERATURE RESISTANT CLIP-TYPE THERMAL INSULATION TELESCOPIC HOSE
- 

P27 双层铝箔内夹管
DOUBLE-LAYER ALUMINUM FOIL INNER CLIP TUBE
- 

P28 玻纤布复合软管
GLASS FIBER CLOTH COMPOSITE HOSE
- 

P29 TPU 聚氨酯钢丝管
TPU POLYURETHANE STEEL WIRE PIPE
- P30** 客户案例
CUSTOMER CASE
- P31-32** 售后服务 / 销售网络
AFTER-SALES SERVICE/SALES NETWORK

18 行业生产经验
INDUSTRY PRODUCTION EXPERIENCE
YEARS

SIX SERIES OF PRODUCTS

六大系列产品



1

HIGH TEMPERATURE AIR DUCT SERIES
高温风管系列

2

NYLON CLOTH DUCT SERIES
尼龙布风管系列

3

TELESCOPIC HOSE SERIES
伸缩软管系列

4

CLIP-ON TELESCOPIC DUCT SERIES
夹式伸缩风管系列

5

COMPOSITE HOSE SERIES
复合软管系列

6

FEEDING HOSE SERIES
过料软管系列

RED/BLACK FLAME RETARDANT HIGH TEMPERATURE VULCANIZED TUBE

红 / 黑色阻燃高温硫化管

玻璃纤维布
Fiberglass cloth

不燃高分子材料
Non-combustible polymer materials

硅橡胶组合
Silicone rubber combination

规格尺寸: Φ19mm- Φ 600mm
管厚: 1.0mm (可按客户要求订做壁厚)
钢丝直径: 1.0-2.3mm
温度: -70℃ -+260℃ 瞬间温度达 300 度, 最大耐压 5000pa
Standard sizes:Φ19mm- Φ 600mm
Tube thickness: 1.0mm (wall thickness can be customized according to customer requirements)
Wire diameter: 1.0-2.3mm
Temperature: -70℃ -+260℃ , the instantaneous temperature reaches 300 degrees, the maximum withstand voltage is 5000pa



产品参数 Product parameter

标准规格 (内径) Standard specification (inner diameter)		长度 Length	重量 Weight
毫米 Millimeter (mm)	英寸 Inch	4 米 / 条 4 meters each	单位 Unit (kg)
φ 19	0.75	4	0.5
φ 25	1	4	0.72
φ 32	1.25	4	0.92
φ 38	1.5	4	1.1
φ 40	-	4	1.1
φ 43	1.75	4	1.18
φ 51	2	4	1.34
φ 60	-	4	1.52
φ 63	2.5	4	1.6
φ 76	3	4	1.94
φ 80	3.15	4	1.98
φ 89	3.5	4	2.52
φ 102	4	4	2.7
φ 115	4.5	4	3.08
φ 127	5	4	3.38
φ 133	5.23	4	3.45
φ 140	5.5	4	3.5
φ 152	6	4	4.1
φ 160	6.3	4	4.18
φ 180	7	4	4.95
φ 203	8	4	5.5
φ 220	9	4	5.94
φ 250	10	4	6.5
φ 300	12	4-	7
φ 400	16	-4	9

注: 可订做 φ 450- φ 600
Note: Can be customized φ 450- φ 600

RED/BLACK SILICONE HIGH TEMPERATURE AIR DUCT

红 / 黑色矽胶高温风管

红、黑色矽胶
Red, black silicone

玻璃纤维布
Fiberglass cloth

规格尺寸: Φ25mm- Φ 600mm
管厚: 0.6-0.8mm (可订做壁厚)
钢丝直径: 1.0-2.3mm
温度: -70℃ -+300℃ 瞬间温度达 330 度
Standard sizes: Φ25mm- Φ 600mm
Tube thickness: 0.6-0.8mm (wall thickness can be customized)
Wire diameter: 1.0-2.3mm
Temperature: -70℃ -+300℃ , the instantaneous temperature reaches 330 degrees



产品参数 Product parameter

标准规格 (内径) Standard specification (inner diameter)		长度 Length	重量 Weight
毫米 Millimeter (mm)	英寸 Inch	4 米 / 条 4 meters each	单位 Unit (kg)
φ 25	1	4	0.8
φ 32	1.25	4	1
φ 38	1.25	4	1.2
φ 51	2	4	1.5
φ 63	2.5	4	1.8
φ 76	3	4	2
φ 89	3.5	4	2.5
φ 102	4	4	3
φ 115	4.5	4	3.5
φ 127	5	4	3.8
φ 150	6	4	4
φ 160	6.2	4	4.2
φ 180	7	4	4.5
φ 200	8	4	5
φ 220	8.75	4	5.5
φ 250	10	4	6
φ 280	11	4	6.8
φ 300	12	4	7
φ 350	14	4	8
φ 400	16	4	9

注: 口径 25—600mm 之间任意尺寸, 长度可以订做。
Note: The caliber is any size between 25-600mm, and the length can be customized.

- 特性 Characteristic
- ▷ 以矽胶玻璃纤维被覆, 内以螺旋钢丝支撑, 常温硫化粘接钢丝之上下层成型。
 - ▷ 最大耐压 5000pa。
 - ▷ 双层管壁, 防漏, 内壁光滑, 任意弯曲, 安装方便。
 - ▷ It is covered with silicone glass fiber and supported by a spiral steel wire inside. The upper and lower layers of the steel wire are vulcanized and bonded at room temperature to form.
 - ▷ The maximum withstand voltage is 5000pa.
 - ▷ Double-layer pipe wall, leak-proof, smooth inner wall, arbitrary bending, easy installation.

- 产品应用 Applications
- ▷ 应用于各种塑料机械、干燥机、印刷机械、热风机、汽车引擎加热、炉窖烘箱、高温整烫, 火车热风系统、航空设备和军事设备, 冷热风循环输送及废气排放。
 - ▷ Used in various plastic machinery, dryers, printing machinery, hot air blowers, automobile engine heating, furnace ovens, high temperature ironing, train hot air systems, aviation equipment and military equipment, circulating cold and hot air conveying and exhaust emissions.

STRENGTHEN HIGH-TEMPERATURE SINGLE-LINE HOSE

加强高温单线软管

矽胶
Silicone

高质量玻璃纤维布
High quality fiberglass cloth

规格尺寸：Φ32mm- Φ 152mm
管厚：1.0-1.2mm
钢丝直径：1.0-1.3mm
温度：-70℃ -+300℃

Standard sizes: Φ32mm- Φ 152mm
Tube thickness: 1.0-1.2mm
Wire diameter: 1.0-1.3mm
Temperature: -70℃ -+300℃



● 质量 ● 诚信 ● 服务

产品参数 Product parameter

标准规格（内径） Standard specification (inner diameter)		长度 Length	重量 Weight
毫米 Millimeter (mm)	英寸 Inch	4 米 / 条 4 meters each	单位 Unit (kg)
φ 38	1.5	4	1.5
φ 40	1.6	4	1.6
φ 43	1.7	4	1.7
φ 45	1.75	4	1.75
φ 49	1.85	4	1.8
φ 51	2	4	1.9
φ 55	2.2	4	2
φ 60	2.37	4	2.1
φ 63	2.5	4	2.4
φ 65	2.7	4	2.6
φ 76	3	4	2.8
φ 80	3.2	4	3
φ 85	3.3	4	3.2
φ 89	3.5	4	3.5
φ 102	4	4	3.8
φ 115	4.5	4	4
φ 127	5	4	4.5
φ 133	5.4	4	4.8
φ 140	5.5	4	5
φ 152	6	4	5.2

注：口径 38—150mm 之间任意尺寸，长度可以订做。
Note: Any size between the diameter of 38-150mm, the length can be customized.

HIGH TEMPERATURE SOFT CONNECTION THICKENED NEGATIVE PRESSURE AIR DUCT

高温加厚负压风管

HIGH TEMPERATURE FLEXIBLE DUCT
高温软接风管

矽胶
Silicone

加厚玻璃纤维布
Thickened glass fiber cloth

规格尺寸：Φ19mm-Φ 600mm
管厚：1.2-5mm
钢丝直径：1.4-2.5mm
温度：-70℃ -+300℃

Standard sizes: Φ19mm-Φ 600mm
Tube thickness: 1.2-5mm
Wire diameter: 1.4-2.5mm
Temperature: -70℃ -+300℃



● 质量 ● 诚信 ● 服务

产品参数 Product parameter

标准规格（内径）Standard specification (inner diameter)		长度 Length	重量 Weight
毫米 Millimeter (mm)	英寸 Inch	4 米 / 条 4 meters each	单位 Unit (kg)
φ 25	1	4	1.5
φ 32	1.25	4	2.5
φ 38	1.5	4	3
φ 51	2	4	3.5
φ 63	2.5	4	4
φ 76	3	4	4.5
φ 89	3.5	4	5
φ 102	4	4	5.5
φ 115	4.5	4	6
φ 127	5	4	6.5
φ 150	6	4	7
φ 200	8	4	9
φ 250	10	4	12
φ 300	12	4	14
φ 400	16	4	18

注：口径 25—600mm 之间任意尺寸，4 米以下长度可订做。
Note: The caliber is any size between 25-600mm, and the length below 4 meters can be customized.

特性 Characteristic

- ▷ 以加厚矽胶玻璃纤维被覆，内以螺旋钢丝支撑，经高温硫化成型。两头各留 5-10cm 不带钢丝加厚软接平口，便于安装紧固，避免卡箍锁破管口，密封性好，耐高温、工作压力大、使用寿命长，耐酸、碱、油、防腐蚀，耐潮、体积轻等。
- ▷ 最大耐压 10000pa。
- ▷ 加厚管壁，防漏，内壁光滑，抗压耐磨。
- ▷ It is covered with thick silicone glass fiber, supported by spiral steel wire, and formed by high temperature vulcanization. Leave 5-10cm at each end without steel wire thickened soft joint flat mouth, which is convenient for installation and tightening, avoiding the pipe opening of the clamp lock, good sealing, high temperature resistance, high working pressure, long service life, acid, alkali, and oil resistance , Anti-corrosion, moisture resistance, light volume, etc.
- ▷ The maximum withstand voltage is 10000pa.
- ▷ Thickened pipe wall, leak-proof, smooth inner wall, compression and wear resistance.

产品应用 Applications

- ▷ 应用于各种塑料机械、干燥机、印刷机械、热风机、汽车引擎加热、炉窖烘箱、高温整烫，火车热风系统、航空设备和军事设备，冷热风循环输送及废气排放。
- ▷ Used in various plastic machinery, dryers, printing machinery, hot air blowers, automobile engine heating, furnace ovens, high-temperature ironing, train hot air systems, aviation equipment and military equipment, circulating cold and hot air transportation and exhaust emissions.


HIGH TEMPERATURE INSULATION AIR DUCT
高温保温风管

阻燃高温风管
Flame retardant
high temperature
air duct

保温玻璃纤维棉
Thermal insulation
glass fiber cotton

规格尺寸: Φ25mm-Φ 600mm (可订做)
管厚: 28mm-50mm
温度: -70℃ -+300℃ 瞬间温度 330 度

Standard sizes: Φ25mm-Φ 600mm (can be customized)
Tube thickness: 28mm-50mm
Temperature: -70℃ -+300℃ , instantaneous temperature 330 degrees

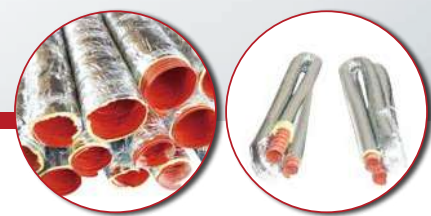

产品参数 Product parameter

标准规格 (内径) Standard specification (inner diameter)		长度 Length	重量 Weight
毫米 Millimeter (mm)	英寸 Inch	4 米 / 条 4 meters each	单位 Unit (kg)
Φ 25	1	4	0.8
Φ 32	1.25	4	1
Φ 38	1.5	4	1.2
Φ 51	2	4	1.5
Φ 63	2.5	4	1.8
Φ 76	3	4	2
Φ 89	3.5	4	2.5
Φ 102	4	4	3
Φ 115	4.5	4	3.5
Φ 127	5	4	3.8
Φ 150	6	4	4
Φ 200	8	4	5
Φ 250	10	4	6
Φ 300	12	4	7
Φ 400	16	4	9

注: 口径 25—600mm 之间任意尺寸, 长度可订做。
Note: The caliber is any size between 25-600mm, length can be customized.

● 质量 ● 诚信 ● 服务

HIGH TEMPERATURE SOFT JOINT INSULATION DUCT
高温软接保温风管

● 质量 ● 诚信 ● 服务

双层阻燃高温风管
Double-layer flame-retardant high-temperature air duct

保温玻璃纤维棉
Thermal insulation
glass fiber cotton

规格尺寸: Φ25mm-Φ600mm
管厚: (按客户要求订做)
温度: -70℃ -+300℃

Standard sizes: Φ25mm-Φ600mm
Tube thickness: (customized according to customer requirements)
Temperature: -70℃ -+300℃



产品应用 Applications

- 用于各种机械、汽车尾气、陶瓷工业, 整套设备等气体、尘埃、烟雾、粉末的抽排换气。它具有耐高温、阻燃、容易安装且耐用等功能。
- 用于热气和冷气的保温隔热引导, 防冷凝露水结珠, 隔热阻燃性能好, 弯曲时管壁不会内凹, 不会产生形变, 抽取和输送良好耐高温保温。
- It is used for the exhaust and ventilation of various machinery, automobile exhaust, ceramic industry, complete equipment and other gases, dust, smoke, and powder. It is resistant to high temperature, flame retardant, easy to install and durable.
- It is used for heat preservation and heat insulation guidance of hot and cold air, anti-condensation and dew condensation, good heat insulation and flame retardant performance, the tube wall will not be concave when bent, will not be deformed, and the extraction and transportation are good for high temperature and heat preservation.
- 特性 Characteristic
- 以高温风管为管内壁, 中间夹高温保温棉, 外加高温风管为密封层, 两端各留 100mm 加厚软接平口, 方便管身对接卡箍紧固, 管口用高温硅胶封口, 高温作业时, 保护管身内壁热量不流失, 达到更好的保温性能, 以免热量散发, 改善工作中的高温恶劣环境避免烫伤等之特殊功能。
- 最大耐压 10000pa。
- Use high-temperature air pipe as the inner wall of the pipe, sandwich high-temperature insulation cotton in the middle, and add a high-temperature air pipe as a sealing layer. Both ends are left with 100mm thick soft joint flat openings to facilitate the fastening of the pipe body butt clamps. The nozzles are sealed with high-temperature silicone, high temperature During operation, it protects the inner wall of the tube from heat loss, achieves better thermal insulation performance, prevents heat dissipation, and improves the special functions of high temperature and harsh environment during work to avoid burns.
- The maximum withstand voltage is 10000pa.

HEAT-RESISTANT 450 DEGREEE CLIP- TYPE THICKENED HEAT-INSULATING AIR DUCT

耐温 450 度夹式加厚保温风管

● 质量 ● 诚信 ● 服务

夹式高温伸缩管
Clip-on high
temperature
telescopic tube

隔热保温棉
Thermal insulation
cotton

硅胶高温风管
Silicone high
temperature air duct

规格尺寸: Φ51mm-Φ600mm
管厚: 50mm (可订做) 最大耐压 10000pa
温度: -70℃ -+500℃

Standard sizes: Φ51mm- Φ600mm
Tube thickness: 50mm (can be customized)
Maximum pressure resistance 10000pa
Temperature: -70℃ -+500℃



产品应用 Applications

- ▶ 用于各种机械、汽车尾气、陶瓷工业，整套设备等气体、尘埃、烟雾、粉末的抽排换气。它具有耐高温、阻燃、容易安装且耐用等功能。
- ▶ 用于热气和冷气的保温隔热引导，防冷凝露水结珠，隔热阻燃性能好，弯曲时管壁不会内凹，不会产生形变，抽取和输送良好，耐高温保温。
- ▶ It is used for the exhaust and ventilation of various machinery, automobile exhaust, ceramic industry, complete equipment and other gases, dust, smoke, and powder. It is resistant to high temperature, flame retardant, easy to install and durable.
- ▶ It is used for heat preservation and heat insulation guidance of hot and cold air, prevents condensation and dew condensation, has good heat insulation and flame retardancy, and the pipe wall will not be concave when bent, and will not deform, and the extraction and transportation are good for high temperature and heat preservation.

特性 Characteristic

- ▶ 内以耐 450℃或耐温 800℃伸缩夹式管为管壁，中间夹高温保温棉，外加高温风管为密封层，两端管口用高温硅胶封口，高温作业时，保护管身内壁热量不流失，达到更好的保温性能，以免热量散发表面温度过高导致工作恶劣环境，避免烫伤等之特殊功能。
- ▶ The inner wall of the tube is a telescopic clip tube with a temperature resistance of 450 °C or a temperature of 800 °C , with high temperature insulation cotton in the middle, and a high temperature air pipe as a sealing layer. The two ends of the pipe are sealed with high temperature silica gel to protect the inner wall of the tube during high temperature operation. No loss, to achieve better thermal insulation performance, so as to avoid heat dissipation, the surface temperature is too high, and the special function of avoiding burns in a harsh working environment.

HIGH TEMPERATURE SOFT JOINT INSULATION DUCT

耐磨高温保温软管

● 质量 ● 诚信 ● 服务


硅胶高温风管
Silicone high temperature
air duct

隔热保温棉
Thermal insulation cotton

耐温耐磨 450 度夹式风管
Temperature-resistant and
wear-resistant 450 degree
clip-on air duct

规格尺寸: Φ38mm-Φ600mm
管厚: 50mm (可订做) 最大耐压 10000pa
温度: -70℃ -+300℃

Standard sizes: Φ38mm-Φ600mm
Tube thickness: 50mm (can be customized)
Maximum pressure resistance 10000pa
Temperature: -70℃ -+300℃

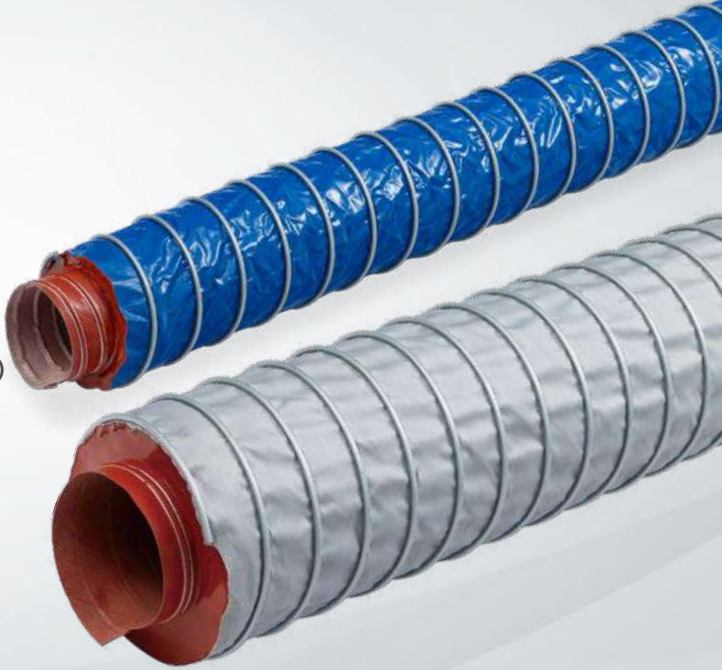

产品应用 Applications

- ▶ 用于各种机械、汽车尾气、陶瓷工业，整套设备等气体、尘埃、烟雾、粉末的抽排换气。它具有耐高温、阻燃、容易安装且耐用等功能。
- ▶ 用于热气和冷气的保温隔热引导，防冷凝露水结珠，隔热阻燃性能好，弯曲时管壁不会内凹，不会产生形变，抽取和输送良好，高温保温。
- ▶ It is used for the exhaust and ventilation of various machinery, automobile exhaust, ceramic industry, complete equipment and other gases, dust, smoke, and powder. It is resistant to high temperature, flame retardant, easy to install and durable.
- ▶ It is used for heat preservation and heat insulation guidance of hot and cold air, prevents condensation and dew condensation, has good heat insulation and flame retardancy, and the pipe wall will not be concave when bent, and will not deform, and the extraction and transportation are good for high temperature and heat preservation.

特性 Characteristic

- ▶ 以阻燃高温硫化管为管壁，中间夹高温保温棉，外加耐温耐磨 450℃夹式风管为密封层，两端管口用高温硅胶封口，高温作业时，保护管身内壁热量不流失，达到更好的保温性能，以免热量散发表面温度过高导致恶劣的工作环境，避免烫伤等特殊功能，耐磨效果极佳。
- ▶ The flame-retardant high-temperature vulcanized pipe is used as the pipe wall, the middle is sandwiched with high-temperature insulation cotton, and the temperature-resistant and wear-resistant 450°C clip-on air pipe is used as the sealing layer. The two ends of the pipe are sealed with high-temperature silicone to protect the inner wall of the pipe from heat during high-temperature operation. It has the special effect of avoiding burns and other special effects, such as heat dissipation, and high surface temperature caused by excessive heat dissipation, and excellent wear resistance.

304 STAINLESS STEEL CORRUGATED PIPE/THICKENED ALUMINUM PIPE

304 不绣钢波纹管 / 加厚铝管

201 不锈钢
201 stainless steel

304 不锈钢带
304 stainless steel belt

规格尺寸: Φ20-Φ350mm
管厚: 0.08mm-0.1mm 之间
耐温: -200℃ -+900℃
正负压强度: 3000-6000pa
长度: 10 米 / 条

Standard sizes: Φ20-Φ350mm
Tube thickness: Between 0.08mm-0.1mm
Temperature resistance: -200 °C -+900 °C
Positive and negative pressure strength: 3000-6000pa
Length: 10 meters/piece

规格尺寸: Φ42-Φ300mm
管厚: 0.08mm、0.09mm、0.1mm 0.12mm、0.16mm
耐温: -70℃ -+300℃
正负压强度: 1000-3000pa
长度: 3 米 / 条
压缩比例: 3:1

Standard sizes: Φ42-300mm
Tube thickness: 0.08mm、0.09mm、0.1mm 0.12mm、0.16mm
Temperature resistance: -70 °C -+300 °C
Positive and negative pressure strength: 1000-3000pa
Length: 3 meters/piece
Compression ratio: 3:1



产品应用 Applications

- ▶ 用途极其广泛, 可用于热水器排气, 机械设备需要排风排气耐高温的地方均可使用。螺旋压制楞筋工艺, 增加强抗压力咬口潜缝, 厚度是管体的四倍, 外观光滑, 无锌瘤、毛刺, 呈银白色; 强度与钢性均好; 厚度均为可控。以精密的咬口成型工艺, 接缝均匀平整, 咬口紧密、密封性好, 连接力强、安装方便, 连接点少。内壁光滑保证通风的流畅, 避免杂物堆积。通风阻力小, 通风噪音小, 档次高, 外观美观。耐腐蚀性好, 采用不锈钢材料, 适用于各种强酸、碱雾气等强腐蚀性环境中。
- ▶ A type of flexible pipeline in modern industrial pipelines, it is pressed by a stainless steel belt bending machine. It has good flexibility, fatigue resistance, high pressure resistance, high and low temperature resistance, corrosion resistance, long life, easy shaping and many other characteristics. Mainly used in chemical industry, furnace, factory and mining equipment, various machinery, electromechanical, construction, building materials and other pipes.
- ▶ This product is a stainless steel hose, which can only be bent, not telescopic. It is shaped after bending and is absolutely fireproof. It has the advantages of anti-rust, high pressure resistance, high and low temperature resistance, fatigue resistance, and easy shaping.
- ▶ 用铝质带机压变曲, 螺旋连接而成, 耐高温, 耐酸碱, 用途广泛, 适合吸尘、排风、抽气之用。
- ▶ 本产品是加厚铝管, 只能弯曲, 不能伸缩, 弯曲后定型, 绝对防火。具有防生锈、耐高压、耐高、低温、易定型等优点。用途极其广泛, 可用于热水器排气, 机械设备需要在排风排气耐高温的地方均可使用。
- ▶ Compressed and deformed by an aluminum belt machine, spirally connected, it is resistant to high temperature, acid and alkali, and has a wide range of uses. It is suitable for dust collection, exhaust, and air extraction.
- ▶ This product is a thick aluminum tube, which can only be bent, can be expanded and contracted, and is shaped after bending, which is absolutely fireproof. It has the advantages of anti-rust, high pressure resistance, high and low temperature resistance, fatigue resistance, and easy shaping. It has a wide range of uses, it can be used for water heater exhaust, and it can be used in exhaust and exhaust places where mechanical equipment needs high temperature resistance.

特性 Characteristic

- ▶ 现代工业管路中一种的柔性管道, 由不锈钢带变曲机压制而成。具有良好的柔软性、耐高压、耐高低温、耐腐蚀性、寿命长、易定型等诸多特性。主要用于化工、炉窑、厂矿设备、各种机械、机电、建筑、建材等用管。
- ▶ 本产品是不锈钢软管, 只能弯曲, 不能伸缩, 弯曲后定型, 绝对防火。具有防生锈、耐高压、耐高低温、易定型等优点。
- ▶ A type of flexible pipeline in modern industrial pipelines, it is pressed by a stainless steel belt bending machine. It has good flexibility, fatigue resistance, high pressure resistance, high and low temperature resistance, corrosion resistance, long life, easy shaping and many other characteristics. Mainly used in chemical industry, furnace, factory and mining equipment, various machinery, electromechanical, construction, building materials and other pipes.
- ▶ This product is a stainless steel hose, which can only be bent, not telescopic. It is shaped after bending and is absolutely fireproof. It has the advantages of anti-rust, high pressure resistance, high and low temperature resistance, fatigue resistance, and easy shaping.
- ▶ 螺旋压制楞筋工艺, 增加强抗压力咬口潜缝, 厚度是管体的四倍, 外观光滑, 无锌瘤、毛刺, 呈银白色; 强度与刚性均好; 厚度均为可控。以精密的咬口成型工艺, 接缝均匀平整, 咬口紧密、密封性好, 连接力强、安装方便, 连接点少。内壁光滑保证通风的流畅, 避免杂物堆积。通风阻力小, 通风噪音小, 档次高, 外观美观。耐腐蚀性好, 采用不锈钢材料, 适用于各种强酸、碱雾气等强腐蚀性环境中。
- ▶ Spiral pressing corrugated bar technology increases strong resistance to pressure. The thickness of the seam is four times that of the pipe body. The appearance is smooth, free of zinc tumors, burrs, and silvery white; both strength and rigidity are good; the thickness is controllable. With the precise bite forming process, the seams are even and flat, the bite is tight, the sealing is good, the connection force is strong, the installation is convenient, and the connection points are few. The smooth inner wall ensures smooth ventilation and avoids accumulation of debris. The ventilation resistance is small, the ventilation noise is low, the grade is high, and the appearance is beautiful. Good corrosion resistance, using stainless steel material, suitable for various strong acid, alkali mist and other strong corrosive environments.

REINFORCED NYLON CLOTH DUCT

加强尼龙布风管

● 质量 ● 诚信 ● 服务

进口尼龙布基布两面阻燃 PVC 涂层
Imported nylon cloth base fabric with flame retardant PVC coating on both sides

高弹力钢丝
High-strength elastic steel wire

规格尺寸: Φ50mm- Φ 600mm
管厚: 0.35mm
耐温: -15℃ -+130℃
钢丝直径: 0.8-2.3mm

Standard sizes: Φ50mm-Φ 600mm
Tube thickness: 0.35mm
Temperature resistance: -15°C -+130°C
Wire diameter: 0.8-2.3mm



产品参数 Product parameter

标准规格 (内径) Standard specification (inner diameter)		长度 Length	重量 Weight
毫米 Millimeter (mm)	英寸 Inch	10 米 / 条 10 meters each	单位 Unit (kg)
Φ 50	2	10	1.7
Φ 63	2.5	10	2.4
Φ 75	3	10	2.5
Φ 80	-	10	2.6
Φ 89	3.5	10	2.9
Φ 100	4	10	3.0
Φ 115	4.5	10	3.3
Φ 127	5	10	3.75
Φ 152	6	10	4.1
Φ 160	6.2	10	4.2
Φ 180	7	10	5.4
Φ 200	8	10	5.5
Φ 220	9	10	4.78
Φ 250	10	10	5.7
Φ 300	12	10	7.35
Φ 350	14	10	9.05
Φ 400	16	10	11
Φ 450	18	10	12.6
Φ 500	20	10	13.9

注: 钢丝粗细及间距可订做。 Note: Wire thickness and spacing can be customized.

特性 Characteristic

- ▶ 以进口尼龙布基布两面阻燃 PVC 涂层被覆, 内夹钢丝支撑, 热熔贴合上下层, 螺旋成型延长。
- ▶ 最大耐压 1200pa, 标准长度 10m , 伸缩比例为 1: 10。
- ▶ 高伸缩弯曲性, 施工容易, 抗老化, 承受压力大, 耐磨耐用。
- ▶ It is covered with flame-retardant PVC coating on both sides of the imported nylon fabric base cloth, supported by steel wire inside, hot-melt bonded to the upper and lower layers, and spirally formed to extend.
- ▶ The maximum pressure resistance is 1200pa, the standard length is 10m, and the expansion ratio is 1:10.
- ▶ High flexibility, easy construction, anti-aging, high pressure, wear resistance and durability.

产品应用 Applications

- ▶ 用于各种机械通风、化学、废气等排放等, 它具有耐高温、耐酸碱、阻燃、离火自熄。
- ▶ It is used for various mechanical ventilation, chemical, exhaust gas, etc. It has high temperature resistance, acid and alkali resistance, flame retardant, and self-extinguishing from fire.

NYLON MESH DUCT

尼龙网布风管

国产尼龙网布
Domestic nylon mesh

高碳钢丝（灰色有备货，蓝色和黑色可订做）
High carbon steel wire (grey is in stock, blue and black can be customized)

规格尺寸：Φ50mm-Φ 600mm
管厚：0.32mm
温度：-10℃ -+100℃
钢丝直径：0.8-2.0mm

Standard sizes: Φ50mm-Φ 600mm
Tube thickness: 0.32mm
Temperature: -10℃ -+100℃
Wire diameter: 0.8-2.0mm

产品参数 Product parameter

标准规格（内径）Standard specification (inner diameter)		长度 Length	重量 Weight
毫米 Millimeter (mm)	英寸 Inch	10 米 / 条 10 meters each	单位 Unit (kg)
Φ 50	2	10	1.43
Φ 63	2.5	10	1.67
Φ 75	3	10	2.15
Φ 80		10	2.25
Φ 89	3.5	10	2.35
Φ 100	4	10	2.46
Φ 115	4.5	10	2.53
Φ 127	5	10	2.9
Φ 152	6	10	3.37
Φ 160	6.2	10	3.8
Φ 180	7	10	4.27
Φ 200	8	10	4.55
Φ 220	9	10	4.78
Φ 250	10	10	5.22
Φ 300	12	10	6.5
Φ 350	14	10	7.06
Φ 400	16	10	8.96
Φ 450	18	10	11.73
Φ 500	20	10	13.4
Φ 550	22	10	14.3

注：钢丝粗细及间距可订做。 Note: Wire thickness and spacing can be customized.

● 质量 ● 诚信 ● 服务



特性 Characteristic

- ▷ 以尼龙网布被覆，内以钢丝支撑，高温热熔贴合上下层，螺旋成型延长。
- ▷ 最大耐压 1000pa，标准长度 10m。
- ▷ 高伸缩弯曲性，施工容易。

- ▷ Covered with nylon mesh cloth, the inner is supported by steel wire, the upper and lower layers are bonded by high temperature heat fusion, and the spiral is formed to extend.
- ▷ The maximum withstand voltage is 1000pa, and the standard length is 10m.
- ▷ High flexibility and flexibility, easy construction.

产品应用 Applications

- ▷ 用于各种机械通风，化学、废气等排放等，它具有耐高温、耐酸碱、阻燃性极强、离火自熄。
- ▷ It is used for various mechanical ventilation, chemical, exhaust gas, etc. It has high temperature resistance, acid and alkali resistance, strong flame retardancy, and self-extinguishing from fire.

PVC MULTI-PURPOSE TELESCOPIC HOSE

PVC 多用途伸缩软管

● 质量 ● 诚信 ● 服务

特等优质阻燃防火 PVC 夹网布
Special high-quality flame-retardant fire-retardant PVC mesh fabric

高碳钢丝（常用颜色是：橘黄色、灰色、黑色、蓝色）
High carbon steel wire (common colors are: orange, gray, black, blue)

黑色 PVC 胶条
Black PVC strip

规格尺寸：Φ100mm-Φ1500mm
之间，任意尺寸可以订做。
管厚：0.35mm-0.5mm
耐温：-15℃ -+100℃

Standard sizes:Φ100mm-Φ1500mm, and any size can be customized.
Tube thickness: 0.35mm-0.5mm
Temperature resistance: -15℃ -+100℃

产品应用 Applications

本通风管由黑色加密塑料胶骨包裹加密加粗钢丝为骨架，以特等优质阻燃防火 PVC 夹网布为管身，独立式加粗尾环，管身处每隔一米打一个金属吊环，可方便固定风管。广泛应用于机房、地下室、隧道、市政管道工程、地下电缆维修、机械造船工程、消防救护、机场、养殖、大棚种植领域、矿山等工作环境下，冷暖空气输送循环，通风换气之用等，是手提式抽送风机的配套使用产品。

The vent pipe is made of black encrypted plastic rubber bone wrapped with encrypted thick steel wire as the skeleton, and the pipe body is made of special high-quality flame-retardant fireproof PVC sandwich net cloth. The independent thick tail ring is located at the pipe body. There is a metal ring every one meter. The duct can be easily fixed. Widely used in computer rooms, basements, tunnels, municipal pipeline engineering, underground cable maintenance, mechanical shipbuilding engineering, fire rescue, airports, breeding, dapeng planting fields, mines and other working environments, cold and warm air transport circulation, ventilation, etc. , It is a supporting product for portable exhaust fan.



产品参数 Product parameter

标准规格（内径）Standard specification (inner diameter)		包装规格（cm）	重量 Weight
毫米 Millimeter (mm)	英寸 Inch	10 米 / 条 10 meters each	单位 Unit (kg)
Φ 150	6	20*20*35	5.8
Φ 200	8	23*23*36	6.8
Φ 250	10	28*28*35	9
Φ 300	12	34*34*28	10.8
Φ 350	14	37*37*28	12
Φ 400	16	43*43*26	13.3
Φ 450	18	48*48*26	16.5
Φ 500	20	53*53*26	21.5
Φ 550	22	58*58*26	23
Φ 600	24	62*62*25	23.8
Φ 650	25	不配纸箱	25
Φ 700	28	不配纸箱	28
Φ 800	32	不配纸箱	30
Φ 900	36	不配纸箱	32
Φ 1000	40	不配纸箱	35

注：钢丝粗细及间距可订做。

Note: Wire thickness and spacing can be customized.



特性 Characteristic

- ▷ 由黑色加密塑胶骨包裹加密加粗钢丝为骨架，以 PVC 夹网布为管身，高温热熔贴合成型。
- ▷ 可伸缩变转驳接自由、伸缩自如、任意弯转；体积轻巧，携带方便。密封性好具有不漏风、耐磨、风阻小、抗压强度大等优点。
- ▷ 耐高温、耐油酸、阻燃、绝缘。
- ▷ 排风专用，最大压：5000pa，标准长度：5m-50m。
- ▷ 绳子直筒式（皮带扣喇叭式）管口，方便套接延长。

- ▷ It is made of black encrypted plastic bone wrapped with encrypted thickened steel wire as the skeleton, PVC sandwich mesh cloth is used as the tube body, and high-temperature hot-melt paste composite type.
- ▷ Scalable, flexible, free to connect, stretch freely, and turn arbitrarily; light in size and easy to carry. Good airtightness has the advantages of no air leakage, wear resistance, low wind resistance, and high compressive strength.
- ▷ High temperature resistance, oleic acid resistance, flame retardant, insulation.
- ▷ For exhaust air, maximum pressure: 5000pa, standard length: 5m-50m.
- ▷ Straight rope type (belt buckle horn type) nozzle for easy extension.

YTK CO.,LTD.

Http://www.ytk-group.co.jp

PVC MULTI-PURPOSE TELESCOPIC HOSE
PVC 多用途负压软管

- 特等优质阻燃防火 PVC 夹网布
Special high-quality flame-retardant fire-retardant PVC mesh fabric
- 高碳钢丝（常用颜色是：橘黄色，灰色，黑色 . 蓝色）
High carbon steel wire (common colors are: orange, gray, black, blue)
- 黑色 PVC 胶条
Black PVC strip

规格尺寸：Φ100mm-Φ1500mm，任意尺寸可以订做。
管厚：（备料厚度）0.35mm-0.5mm
耐温：-15℃ -+100℃

Standard sizes: Φ100mm-Φ1500mm, any size can be customized.
Tube thickness: (Stock thickness) 0.35mm-0.5mm
Temperature resistance: -15℃ -+100℃

产品应用 Applications

本通风管由黑色加密塑料胶骨包裹加密加粗钢丝为骨架，以特等优质阻燃防火 PVC 夹网布为管身，独立式加粗尾环，管身处每隔一米打一个金属吊环，可方便固定风管。广泛应用于机房、地下室、隧道、市政管道工程、地下电缆维修、机械造船工程、消防救护、机场、养殖、大棚种植领域、矿山等工作环境下，冷暖空气输送循环，通风换气之用等，是手提式抽送风机的配套使用产品！
The vent pipe is made of black encrypted plastic rubber bone wrapped with encrypted thick steel wire as the skeleton, and the pipe body is made of special high-quality flame-retardant fireproof PVC sandwich net cloth. The independent thick tail ring is located at the pipe body, and there is a metal ring every one meter. The duct can be easily fixed. Widely used in computer rooms, basements, tunnels, municipal pipeline engineering, underground cable maintenance, mechanical shipbuilding engineering, fire rescue, airport, breeding, greenhouse planting fields, mines and other working environments, cold and warm air transport circulation, ventilation, etc., It is a supporting product for portable exhaust fan!

产品参数 Product parameter

标准规格（内径） Standard specification (inner diameter)		包装规格（cm）	重量 Weight
毫米 Millimeter (mm)	英寸 Inch	10 米 / 条 10 meters each	单位 Unit (kg)
Φ 150	6	20*20*35	5.8
Φ 200	8	23*23*36	6.8
Φ 250	10	28*28*35	9
Φ 300	12	34*34*28	10.8
Φ 350	14	37*37*28	12
Φ 400	16	43*43*26	13.3
Φ 450	18	48*48*26	16.5
Φ 500	20	53*53*26	21.5
Φ 550	22	58*58*26	23
Φ 600	24	62*62*25	23.8
Φ 650	25	不配纸箱	25
Φ 700	28	不配纸箱	28
Φ 800	32	不配纸箱	30
Φ 900	36	不配纸箱	32
Φ 1000	40	不配纸箱	35

注: 钢丝规格及间距可按客户要求订做。
Note: Wire specifications and spacing can be customized according to customer requirements.

MULTI-PURPOSE TELESCOPIC HOSE
FOR AQUACULTURE
养殖业专用多用途伸缩软管

特等优质阻燃防火 PVC 夹网布
Special high-quality flame-retardant fire-retardant PVC mesh fabric

黑色 PVC 胶条
Black PVC strip

高碳钢丝（常用颜色是：橘黄色，灰色，黑色 . 蓝色）
High carbon steel wire (common colors are: orange, gray, black, blue)

规格尺寸：Φ150mm-Φ1500mm，任意尺寸可以订做。
管厚：0.35mm-0.5mm
温度：-15℃ -+100℃ 耐压 5000pa

Standard sizes: Φ150mm-Φ1500mm, any size can be customized.
Tube thickness: 0.35mm-0.5mm
Temperature: -15℃ -+100℃ withstand voltage 5000pa

产品参数 Product parameter

标准规格（内径）Standard specification (inner diameter)		包装规格（cm）	重量 Weight
毫米 Millimeter (mm)	英寸 Inch	10 米 / 条 10 meters each	单位 Unit (kg)
Φ 150	6	20*20*35	5.8
Φ 200	8	23*23*36	6.8
Φ 250	10	28*28*35	9
Φ 300	12	34*34*28	10.8
Φ 350	14	37*37*28	12
Φ 400	16	43*43*26	13.3
Φ 450	18	48*48*26	16.5
Φ 500	20	53*53*26	21.5
Φ 550	22	58*58*26	23
Φ 600	24	62*62*25	23.8
Φ 650	25	不配纸箱	25
Φ 700	28	不配纸箱	28
Φ 800	32	不配纸箱	30
Φ 900	36	不配纸箱	32
Φ 1000	40	不配纸箱	35

注: 钢丝规格及间距可按客户要求订做。
Note: Wire specifications and spacing can be customized according to customer requirements.



用途和特点 Uses and features

本产品为养殖场，大棚种植领域专用，以特等优质阻燃防火 PVC 夹网布为管身，黑色塑料胶骨包裹加强弹力钢丝为骨架，独立式加粗尾环，管身每隔一米打一个金属吊环，可根据客户的要求在管身上不同的角度开出不同口径的出风口，把管内的冷热气体输送入指定的场所，让畜牧及植物在更适合的温度中快速成长，提高养殖种植的效益。
This product is dedicated for breeding farms and greenhouse planting fields. It uses special high-quality flame-retardant fireproof PVC mesh cloth as the tube body, black plastic bone wrapped reinforced elastic steel wire as the skeleton, independent thick tail ring, and the tube body is beaten every one meter. A metal lifting ring can open air outlets of different calibers at different angles on the tube body according to customer requirements, and transport the hot and cold gas in the tube to the designated place, allowing livestock and plants to grow rapidly at a more suitable temperature and improve breeding The benefits of planting.

MULTI-PURPOSE THERMAL INSULATION THICKENED TELESCOPIC HOSE

多用途保温加厚伸缩软管

● 质量 ● 诚信 ● 服务

双层 PVC 夹网布
Double-layer PVC mesh cloth

内夹保温棉
Insulation cotton

黑色 PVC 胶条
Black PVC strip

高强弹力钢丝
High-strength elastic steel wire

规格尺寸: $\Phi 150\text{mm}-\Phi 1500\text{mm}$
长度: 5 米 /10 米 (其他长度可以订制)
温度: $-15^{\circ}\text{C} \rightarrow +100^{\circ}\text{C}$

Standard sizes: $\Phi 150\text{mm}-\Phi 1500\text{mm}$
length: 5m/10m (other lengths can be customized)
Temperature : $-15^{\circ}\text{C} \rightarrow +100^{\circ}\text{C}$



最新产品 Latest Products

- ▷ 各大型展会、飞机等特殊行业冷热气输送，具有良好的保温效果，使用过程中不让管内的冷热气体散发。
- ▷ The transportation of hot and cold air in various large-scale exhibitions, airplanes and other special industries has a good thermal insulation effect, and the hot and cold air in the tube is not allowed to escape during use.

特性 Characteristic

- ▷ 上下两层均为阻燃 PVC 夹网布材料、中间珍珠棉复合成管身，由黑色塑胶胶骨包裹高碳钢丝为骨架。
- ▷ 具有热损耗少，风阻小，质量轻，消声效果好，节能环保等优点。外层抗磨胶条包裹的钢丝骨架柔软耐磨，易于运输安装。
- ▷ 伸缩自如、任意弯曲、体积轻巧、风阻小抗压强度增大等优点。
- ▷ 排风专用，最大正压：5000pa。
- ▷ 耐油酸，阻燃。
- ▷ The upper and lower layers are made of flame-retardant PVC sandwich mesh material, the middle pearl cotton is compounded into the tube body, and the black plastic rubber bone is wrapped with high carbon steel wire as the skeleton.
- ▷ It has the advantages of low heat loss, low wind resistance, light weight, good noise reduction effect, energy saving and environmental protection. The steel wire skeleton wrapped by the outer anti-wear rubber strip is soft and wear-resistant, easy to transport and install.
- ▷ The advantages of free expansion and contraction, arbitrary bending, light volume, small wind resistance and increased compressive strength.
- ▷ For exhaust air, maximum positive pressure: 5000pa.
- ▷ Resistant to oleic acid, flame retardant.

MULTI-PURPOSE NON-SKELETON POSITIVE PRESSURE HOSE

多用途无骨架正压软管

● 质量 ● 诚信 ● 服务

SPECIAL-SHAPED FLEXIBLE DUCT

异型软接风管

特等优质防火阻燃 PVC 夹网布
Special high-quality fire-retardant PVC mesh fabric

规格尺寸: $\Phi 100\text{mm}-\Phi 2000\text{mm}$ (可订做任意口径)
管厚: 0.35mm-0.8mm
温度: $-15^{\circ}\text{C} \rightarrow +100^{\circ}\text{C}$

Standard sizes: $\Phi 100\text{mm}-\Phi 2000\text{mm}$ (any caliber can be customized)
Tube thickness: 0.35mm-0.8mm
Temperature : $-15^{\circ}\text{C} \rightarrow +100^{\circ}\text{C}$



最新产品 Latest Products

- ▷ 全软型通风管，同有骨架通风管相比，本通风管具有成本低，重量轻，不使用时自动回位，不占用地方，施工方便等优点。
- ▷ Compared with the framed ventilation pipe, this ventilation pipe has the advantages of low cost, light weight, automatic return when not in use, does not occupy space, and is convenient for construction.

特性 Characteristic

- ▷ 以塑料夹网布为管身，无钢丝骨架，折叠方便。
- ▷ 可伸缩变转，驳接自由，体积轻巧。
- ▷ 耐高温，耐油酸，阻燃，绝缘。
- ▷ 最大耐压：正压 2000pa，标准长度：5m-100m。
- ▷ Use plastic mesh cloth as the tube body, no steel wire skeleton, easy to fold.
- ▷ Scalable and variable, free to connect, and light in size.
- ▷ High temperature resistance, oleic acid resistance, flame retardant, insulation.
- ▷ Maximum withstand pressure: positive pressure 2000pa, standard length: 5m-100m.

YTK CO.,LTD.

[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

800 DEGREE TEMPERATURE
RESISTANT TELESCOPIC DUCT

耐温 800 度伸缩风管

● 质量 ● 诚信 ● 服务

特种玻纤维布
Special glass fiber
cloth

高温涂层
High temperature
coating

不锈电解钢夹
Stainless electrolytic
steel clip



规格尺寸: Φ125mm-Φ1500mm
管厚: 0.95mm
温度: -70℃ ~+800℃

Standard sizes: Φ125mm-Φ1500mm
Tube thickness: 0.95mm
Temperature: -70℃ ~+800℃



产品参数 Product parameter

标准规格 (内径) Standard specification (inner diameter)		长度 Length	重量 Weight
毫米 Millimeter (mm)	英寸 Inch	10 米 / 条 10 meters each	单位 Unit (kg)
Φ 127	5	10	12
Φ 152	6	10	13
Φ 160	6.2	10	14
Φ 180	7	10	15
Φ 200	8	10	16
Φ 250	10	10	17
Φ 300	12	10	19
Φ 350	14	10	21
Φ 400	16	10	23
Φ 500	20	10	26
Φ 600	24	10	30
Φ 700	28	10	35
Φ 800	32	10	40
Φ 900	36	10	45
Φ 1000	40	10	52

注: 口径 125—1500mm 之间任意尺寸, 长度可以订做。

Note: The caliber is any size between 125-1500mm, and the length can be customized.

TEMPERATURE RESISTANT 450
DEGREES TELESCOPIC DUCT

耐温 450 度伸缩风管

● 质量 ● 诚信 ● 服务

高质量玻璃纤维布
High quality
fiberglass cloth

灰色高温涂层
Gray high
temperature coating

不锈电解钢夹
Stainless electrolytic
steel clip



规格尺寸: Φ51mm-Φ1500mm
管厚: 0.45mm
温度: -70℃ ~+450℃

Standard sizes: Φ51mm-Φ1500mm
Tube thickness: 0.45mm
Temperature: -70℃ ~+450℃



产品参数 Product parameter

标准规格 (内径) Standard specification (inner diameter)		长度 Length	重量 Weight
毫米 Millimeter (mm)	英寸 Inch	10 米 / 条 10 meters each	单位 Unit (kg)
Φ 50	2	10	3.8
Φ 63	2.5	10	4
Φ 75	3	10	4.2
Φ 89	3.5	10	4.4
Φ 100	4	10	5
Φ 115	4.5	10	5.2
Φ 127	5	10	6.25
Φ 152	6	10	7.55
Φ 160	6.2	10	8.5
Φ 180	7	10	10.5
Φ 200	8	10	11
Φ 220	9	10	12.55
Φ 250	10	10	13.5
Φ 300	12	10	14.5
Φ 350	14	10	16
Φ 400	16	10	18

注: 口径 51—1500mm 之间任意尺寸, 长度可以订做。

Note: Any size between 51-1500mm diameter, length can be customized.

特性 Characteristic

- ▷ 以 (多层) 特种耐热纤维加高温涂层, 内衬高强度纤维线, 用金属夹夹住材料上下端咬口螺旋成型延长, 管壁密封性好不漏风。
- ▷ 最大耐压 5000pa。
- ▷ 质量超轻, 非常强韧, 弯曲半径约等于外径; 压缩比为 1.2:10。

- ▷ With (multi-layer) special heat-resistant fiber and high-temperature coating, lined with high-strength fiber thread, the upper and lower ends of the material are clamped by metal clips to form a spiral shape and extend, and the pipe wall has good airtightness and no air leakage.
- ▷ The maximum withstand voltage is 5000pa.
- ▷ The mass is ultra-light, very strong, the bending radius is approximately equal to the outer diameter; the compression ratio is 1.2:10.

产品应用 Applications

- ▷ 适用于各种特殊机械, 高温锅炉, 炽热气体循环排放等。
- ▷ It is suitable for all kinds of special machinery, high-temperature boilers, hot gas circulation discharge, etc.

特性 Characteristic

- ▷ 以进口高质量玻璃纤维涂层布 (一层) 及高强度纤维线, 用金属夹夹住材料上下端螺旋成型延长, 管壁密封性好管身不漏风。
- ▷ 最大耐压 5000pa。
- ▷ 质量超轻, 非常强韧, 弯曲半径约等于外径; 压缩比为 1:10。

- ▷ Using imported high-quality glass fiber coated cloth (one layer) and high-strength fiber thread, the upper and lower ends of the material are clamped by metal clamps to form a spiral to extend, and the tube wall is tightly sealed and the tube body does not leak.
- ▷ The maximum withstand voltage is 5000pa.
- ▷ Ultra-light weight, very strong and tough, the bending radius is approximately equal to the outer diameter; the compression ratio is 1:10.

产品应用 Applications

- ▷ 各种机械设备、汽车尾气、高温焊锡烟雾、高温锅炉炽热气体循环废气排放。
- ▷ Various mechanical equipment. Automobile exhaust, high-temperature solder smoke. High-temperature boiler hot gas circulating exhaust gas emission.

YTK CO.,LTD.

Http://www.ytk-group.co.jp

THREE-PROOF
CLOTH TELESCOPIC HOSE

三防布伸缩软管

● 质量 ● 诚信 ● 服务

橘红、绿色、蓝色
三防布
Orange, green, blue
three-proof cloth

不锈钢电解钢夹
Stainless electrolytic
steel clip



规格尺寸: $\Phi 51\text{mm}-\Phi 1500\text{mm}$
管厚: 0.35mm
温度: $-30^{\circ}\text{C} \sim +210^{\circ}\text{C}$
Standard sizes: $\Phi 51\text{mm}-\Phi 1500\text{mm}$
Tube thickness: 0.35mm
Temperature: $-30^{\circ}\text{C} \sim +210^{\circ}\text{C}$



产品参数 Product parameter

标准规格 (内径) Standard specification (inner diameter)		长度 Length	重量 Weight
毫米 Millimeter (mm)	英寸 Inch	10 米 / 条 10 meters each	单位 Unit (kg)
$\Phi 50$	2	10	3.5
$\Phi 63$	2.5	10	3.8
$\Phi 75$	3	10	4
$\Phi 89$	3.5	10	4.2
$\Phi 100$	4	10	4.5
$\Phi 115$	4.5	10	5
$\Phi 127$	5	10	5.2
$\Phi 152$	6	10	6
$\Phi 160$	6.2	10	6.5
$\Phi 180$	7	10	7
$\Phi 200$	8	10	8
$\Phi 250$	10	10	9.5
$\Phi 300$	12	10	11
$\Phi 350$	14	10	13
$\Phi 400$	16	10	15

注: 口径 51—1500mm 之间任意尺寸, 长度可以订做。

Note: Any size between 51-1500mm diameter, length can be customized.

HIGH TEMPERATURE RESISTANT CLIP-TYPE
THERMAL INSULATION TELESCOPIC HOSE

耐高温夹式保温伸缩软管

● 质量 ● 诚信 ● 服务

双层特殊玻璃纤维涂层布
Double-layer special
glass fiber coated cloth

隔热保温棉
Thermal insulation
cotton

不锈钢电解钢夹
Stainless electrolytic
steel clip

规格尺寸: $\Phi 200\text{mm}-\Phi 1500\text{mm}$
管厚: 28mm
温度: $-70^{\circ}\text{C} \sim +400^{\circ}\text{C}$
Standard sizes: $\Phi 200\text{mm}-\Phi 1500\text{mm}$
Tube thickness: 28mm
Temperature: $-70^{\circ}\text{C} \sim +400^{\circ}\text{C}$



产品应用 Applications

各种特殊机械、高温锅炉、炽热气体保温循环抽排等。
All kinds of special machinery, high temperature boilers, hot gas insulation
circulating pumping and exhausting, etc.



产品参数 Product parameter

标准规格 (内径) Standard specification (inner diameter)		长度 Length	重量 Weight
毫米 Millimeter (mm)	英寸 Inch	10 米 / 条 10 meters each	单位 Unit (kg)
$\Phi 200$	8	10	40
$\Phi 250$	10	10	45
$\Phi 300$	12	10	50
$\Phi 350$	14	10	55
$\Phi 400$	16	10	60

注: 口径 200—1500mm 之间任意尺寸, 长度可以订做。 Note: The caliber is any size between 200-1500mm, and the length can be customized.

特性 Characteristic

- ▷ 以两层特殊玻璃纤维涂层布, 中间夹 25mm 高温隔热保温棉, 用强力金属夹夹住材料上下端螺旋成型延长, 它具有保温及储存管内热量, 不散发流失, 改善表面温度过高导致工作环境恶劣, 避免烫伤等特殊功能。
- ▷ 最大耐压 8000pa。
- ▷ 质量超轻, 非常强韧, 弯曲灵活, 安装使用方便, 压缩比为 3: 10。
- ▷ With two layers of special glass fiber coated cloth, 25mm high temperature thermal insulation cotton is sandwiched in the middle, and the upper and lower ends of the material are clamped by strong metal clips to form a spiral shape to extend. It has insulation and storage of heat in the tube, does not radiate loss, and improves the surface temperature caused by excessively high Special functions such as avoiding burns in harsh working environment.
- ▷ The maximum withstand voltage is 8000pa.
- ▷ Ultra-light weight, very strong, flexible, easy to install and use, the compression ratio is 3:10.

YTK CO.,LTD.

[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

DOUBLE-LAYER ALUMINUM
FOIL INNER CLIP TUBE
双层铝箔内夹管

双层铝箔
Double-layer
aluminum foil

镀锌铁皮
Galvanized iron

规格尺寸: Φ35mm-Φ350mm
管厚: 0.5mm 双层管壁
温度: -70℃ -+400℃
标准长度: 5 米、10 米

Standard sizes:Φ35mm-Φ350mm
Tube thickness: 0.5mm double wall
Temperature: -70℃ -+400℃
Standard length: 5 meters, 10 meters

产品应用 Applications

各种机械气体排放和循环，耐高温耐酸碱。
Various mechanical gas emission and circulation, high temperature resistance and acid and alkali resistance.

特性 Characteristic

- ▷ 以螺旋镀锌铁皮咬扣加厚双层铝箔两端，螺旋成型延长，它具有耐拉、耐磨等特性。
- ▷ The two ends of the double-layer aluminum foil are thickened with a spiral galvanized iron sheet to bite and buckle. The spiral is formed to extend. It has the characteristics of tensile and wear resistance.

产品参数 Product parameter

标准规格（内径）Standard specification (inner diameter)		长度 Length		重量 Weight
毫米 Millimeter (mm)	英寸 Inch	5 米 / 条 5 meters each		单位 Unit (kg)
Φ 35	1.4	5		1.8
Φ 38	1.5	5		1.8
Φ 50	2	5		2
Φ 65	2.5	5		2.5
Φ 75	3	5		3
Φ 80	3.1	5		3.5
Φ 100	4	5		4
Φ 120	4.7	5		4.5
Φ 125	5	5		5
Φ 150	6	6		6
Φ 160	6.2	5		6.5
Φ 200	8	5		7
Φ 250	10	5		7.5
Φ 300	12	5		8.2
Φ 350	14	5		9.1

注：口径 200—1500mm 之间任意尺寸，长度可以订做。 Note: The caliber is any size between 200-1500mm, and the length can be customized.

GLASS FIBER CLOTH
COMPOSITE HOSE

玻纤布复合软管

麦拉铝箔
Mylar aluminum foil

阻燃玻纤布
Flame-retardant
fiberglass cloth

钢丝
Steel wire

规格尺寸: Φ50mm-Φ450mm
管厚: 0.5mm
钢丝: 0.8mm-2.0mm
耐热: -15℃ -+100℃

Standard sizes: Φ50mm-Φ450mm
Tube thickness: 0.5mm
Steel wire: 0.8mm-2.0mm
Heat resistant: -15℃ -+100℃

产品应用 Applications

各种机械、厂房气体排放和循环用，它具有耐高温、耐酸碱、防火阻燃之特性。
Various machinery, workshop gas emission and recycling, it has the special effects of high temperature resistance, acid and alkali resistance, fire resistance and flame retardant.

特性 Characteristic

- ▷ 内以高档铝箔，外表粘合防火阻燃性极佳进口玻纤布，内以钢丝支撑贴合螺旋成型延长。
- ▷ The inner is made of high-grade aluminum foil, the outer surface is bonded with imported glass fiber cloth with excellent fire resistance and flame retardancy, and the inner is supported by steel wire to be attached to spiral forming and extending.

产品参数 Product parameter

标准规格（内径）Standard specification (inner diameter)		长度 Length	重量 Weight
毫米 Millimeter (mm)	英寸 Inch	10 米 / 条 10 meters each	单位 Unit (kg)
Φ 50	2	10	1.1
Φ 63	2.5	10	1.15
Φ 75	3	10	1.45
Φ 80	3.2	10	1.5
Φ 89	3.5	10	1.55
Φ 100	4	10	1.8
Φ 115	4.5	10	1.9
Φ 127	5	10	2.05
Φ 152	6	10	2.3
Φ 160	6.2	10	2.75
Φ 180	7	10	2.85
Φ 200	8	10	3.05
Φ 250	10	10	3.65
Φ 300	12	10	4.65
Φ 350	14	10	5.03
Φ 400	16	10	6.55
Φ 450	18	10	7.36

注：钢丝规格及间距可按客户要求订做。

Note: Wire specifications and spacing can be customized according to customer requirements.

YTK CO.,LTD.

Http://www.ytk-group.co.jp

TPU POLYURETHANE
STEEL WIRE PIPE

TPU 聚氨酯钢丝管

食品级 TPU 聚氨酯
Food grade TPU
polyurethane

镀铜或不锈钢钢丝
Copper or stainless
steel wire

构造: 以环保食品级耐磨 TPU 聚氨酯原料, 高温
热熔注塑出片贴合, 内衬高强度弹性螺旋钢丝
适用温度范围: 约 -35°C至 90°C
壁厚: 0.6mm-2mm
硬度范围: 80A-90A

Structure: It is made of environmentally-friendly food-grade wear-
resistant TPU polyurethane raw material, high-temperature hot-melt
injection molding, and is lined with high-strength elastic spiral steel wire
Applicable temperature range: About -35°C to 90°C
Wall thickness: 0.6mm-2mm
Hardness range: 80A-90A

产品应用 Applications

适用于除尘和抽吸设备、工业用真空吸尘器、空调及通风技术, 食品和工业、
化工行业等。如固体研磨物(粉尘、粉末、纤维碎屑和颗粒物)、高流动速率
非常有磨损力的沙砾、碎石、无用的玻璃和屑片, 气态和液态介质(油蒸汽、
焊烟、通风设备)的输送系统, 可根据客户要求订做非标准软管。

It is suitable for dust removal and suction equipment, industrial vacuum cleaners, air conditioning and ventilation technology, food
and industry, chemical industries, etc. Such as solid abrasives (dust, powder, fiber debris and particulate matter), high flow rate
and very abrasive gravel, crushed stone, useless glass and chips, gaseous and liquid media (oil vapor, welding fumes, ventilation
equipment) The delivery system can be customized non-standard hoses according to customer requirements.

产品参数 Product parameter

内径 mm The inside diameter of	外径 mm Outer diameter	超压 bar Overpressure	真空 bar Vacuum	重量 kg/m Weight	长度 m Length	壁厚 m Wall thickness
25	32	1.600	0.36	0.17	10	0.4/6/0.9
30	37	1.345	0.34	0.20	10	0.4/6/0.9
32	39	1.260	0.34	0.21	10	0.4/6/0.9
38	45	1.060	0.32	0.25	10	0.4/6/0.9
40	47	1.015	0.3	0.28	10	0.4/6/0.9
50	58	0.815	0.26	0.36	10	0.4/6/0.9
60	68	0.680	0.21	0.43	10	0.4/6/0.9
65	73	0.630	0.18	0.47	10	0.4/6/0.9
70	78	0.585	0.15	0.50	10	0.4/6/0.9
75	83	0.545	0.14	0.53	10	0.4/6/0.9
80	88	0.510	0.13	0.57	10	0.6/0.9/1.2
90	98	0.455	0.115	0.63	10	0.6/0.9/1.2
100	108	0.410	0.09	0.66	10	0.6/0.9/1.2
110	118	0.375	0.08	0.73	10	0.6/0.9/1.2
115	123	0.355	0.075	0.76	10	0.6/0.9/1.2
120	128	0.340	0.06	0.79	10	0.6/0.9/1.2
125	133	0.330	0.06	0.82	10	0.6/0.9/1.2
130	138	0.315	0.06	0.85	10	0.6/0.9/1.2
140	148	0.295	0.06	0.92	10	0.6/0.9/1.2
150	158	0.275	0.055	0.98	10	0.6/0.9/1.2
160	168	0.255	0.045	1.04	10	0.6/0.9/1.2
170	178	0.240	0.04	1.11	10	0.6/0.9/1.2
175	183	0.235	0.04	1.14	10	0.6/0.9/1.2
180	188	0.230	0.04	1.17	10	0.6/0.9/1.2
200	208	0.205	0.04	1.29	10	0.6/0.9/1.2
225	233	0.180	0.03	1.45	10	0.6/0.9/1.2
250	258	0.165	0.015	1.61	10	0.6/0.9/1.2
300	309	0.135	0.015	2.23	10	0.6/0.9/1.2
350	359	0.115	0.01	2.59	10	0.6/0.9/1.2

注: 钢丝规格及间距可按客户要求订做。 Note: Wire specifications and spacing can be customized according to customer requirements.

CUSTOMER CASE

客户案例

● 质量 ● 诚信 ● 服务



研发销售生产各种高温风管
R & D, sales and production of various
high temperature air ducts



YTK CO.,LTD.

Http://www.ytk-group.co.jp