

LED Warning Light

Approval No.:
R65 TA2 E9 00 6515
R10 -E9 10R 05 16211

SAE J845 JUN2013 (SAE W3)
Class 1 (Amber/Yellow)



Smooth lens



Striple lens



WL400H

with Ultrathin design 3 bolt Aluminium base



WL431H

with magnet base



WL430H

Ultrathin design, Aluminium base,
with magnet base



WL401H

with flexible DIN base

DESCRIPTION



Input Voltage

DC12-24V



Light Source

SMD3535 3W LED , 24pcs



Function

Single Flashing, Dual Flashing, Rotating



Lens Material

PC



Base Material

ABS




Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C

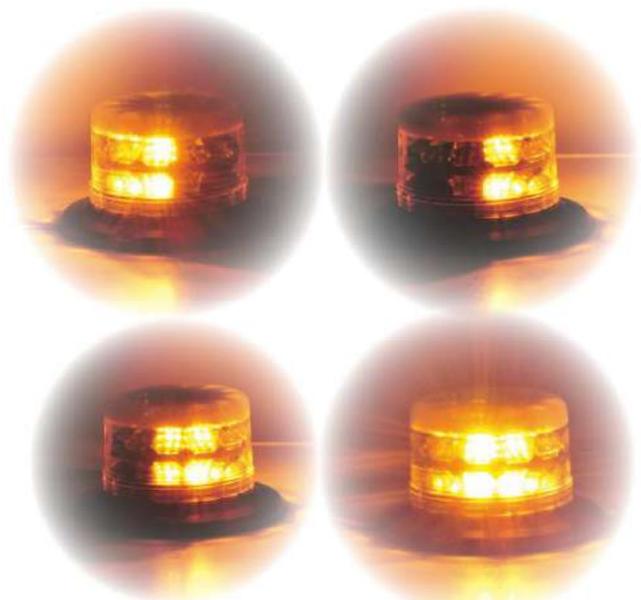

YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

LED Warning Light

Approval No.:
R65 TA2 E9 00 6515
R10 -E9 10R 05 16211

SAE J845 JUN2013 (SAE W3)
Class 1 (Amber/Yellow)



Smooth lens



Stripe lens



WL821-ST

with Ultrathin design 3 bolt Aluminium base



WL823-ST

with magnet base



WL824-ST

Ultrathin design, Aluminium base,
with magnet base



WL822-ST

with flexible DIN base

DESCRIPTION



Input Voltage

DC12-24V



Light Source

SMD3535 3W LED , 16pcs



Function

Flashing, Rotating



Lens Material

PC



Base Material

ABS



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C

16 LED



YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

LED Warning Light

**SAE J845 JUN2013 (SAE W3)
Class 1 (Amber/Yellow)**



Amber



Clear



WL670-SMPRO

with Ultrathin design 3 bolt Aluminium base



WL671-SMPRO

with magnet base



WL672-SMPRO

Ultrathin design, Aluminium base,
with magnet base



WL673-SMPRO

with flexible DIN base

DESCRIPTION

8 LED



Input Voltage

DC12-24V



Light Source

SMD3535 3W LED , 16pcs



Function

Flashing, Rotating



Lens Material

PC



Base Material

ABS



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C



LED Warning Light

**SAE J845 JUN2013 (SAE W3)
Class 1 (Amber/Yellow)**



Amber



WL400PRO

with Ultrathin design 3 bolt Aluminium base



Clear



WL431PRO

with magnet base



WL430PRO

Ultrathin design, Aluminium base,
with magnet base



WL401PRO

with flexible DIN base

DESCRIPTION

8 LED



Input Voltage

DC12-24V



Light Source

SMD3535 3W LED , 8pcs



Function

Flashing, Rotating



Lens Material

PC



Base Material

ABS



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C



LED Warning Light

Approval No.:
R65 TA2 E9 00 6515
R10 -E9 10R 05 16211

SAE J845 JUN2013 (SAE W3)
Class 1 (Amber/Yellow)



WL400

with Ultrathin design 3 bolt Aluminium base



WL431

with magnet base



WL430

Ultrathin design, Aluminium base,
with magnet base



WL401-RG

with flexible DIN base

DESCRIPTION

12 LED



Input Voltage

DC12-24V



Light Source

SMD3535 3W LED , 12pcs



Function

Single Flashing /
Dual Flashing /
Rotating



Lens Material

PC



Base Material

ABS



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C



YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

LED Warning Light

Approval No.:
R65 TB2 E9 00 6231
R10 -E9 10R 05 16211

SAE J845 JUN2013 (SAE W3)
Class 1 (Amber/Yellow)



WL400

with Ultrathin design 3 bolt Aluminium base



WL431

with magnet base



WL430

Ultrathin design, Aluminium base,
with magnet base



WL401-RG

with flexible DIN base

DESCRIPTION

12 LED



Input Voltage

DC12-24V



Light Source

SMD3535 3W LED , 12pcs



Function

Single Flashing /
Dual Flashing /
Rotating



Lens Material

PC



Base Material

ABS



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C



YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

LED Warning Light

Approval No.:

R65 E9 65R00 10 6104 00
R10 E9 10R 05 16099 00

SAE J845 JUN2013 (SAE W3)
Class 1 (Amber/Yellow)



WL431S

with magnet base



WL400S

with Ultrathin design 3 bolt Aluminium base



WL430S

Ultrathin design, Aluminium base,
with magnet base



WL401S-RG

with flexible DIN base



WL431S

with magnet base



WL400S

with Ultrathin design 3 bolt Aluminium base



WL430S

Ultrathin design, Aluminium base,
with magnet base



WL401S-RG

with flexible DIN base

DESCRIPTION

45 LED



Input Voltage

DC12-24V



Light Source

0.5W LED , 45pcs



Function

Flashing, Rotating



Lens Colors

Amber, Red, Blue, Green, Clear



Lens Material

PC



Base Material

Aluminum



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C



YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

LED Warning Light **Air Port Flash Model**

Approval No.:
R65 TA2 E9 00 6515
R10 E9 10R 05 16211

SAE J845 JUN2013 (SAE W3)
Class 1 (Amber/Yellow)



WL431

with magnet base



WL400

with Ultrathin design 3 bolt Aluminium base



WL430

Ultrathin design, Aluminium base,
with magnet base



WL401-RG

with flexible DIN base



WL431

with magnet base



WL400

with Ultrathin design 3 bolt Aluminium base



WL430

Ultrathin design, Aluminium base,
with magnet base



WL401-RG

with flexible DIN base

DESCRIPTION

12 LED



Input Voltage

DC12-24V



Light Source

3W LED , 12pcs



Function

Airport Flashing Mode



Lens Colors

Amber,Red,Blue,Green,Clear



Lens Material

PC



Base Material

Aluminum



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C



YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

LED Warning Light



ECE
Reg 65

R10

LED



SAE J845 JUN2013 (SAE W3)
Class 1 (Amber/Yellow)



WL671-ST

with magnet base



WL670-ST

with Ultrathin design 3 bolt Aluminium base



WL673-ST

Ultrathin design, Aluminium base,
with magnet base



WL672-ST-RG

with flexible DIN base



WL671-SM

with magnet base



WL670-SM

with Ultrathin design 3 bolt Aluminium base



WL673-SM

Ultrathin design, Aluminium base,
with magnet base



WL672-SM-RG

with flexible DIN base

DESCRIPTION



Input Voltage

DC12-24V



Light Source

3W LED , 8pcs



Function

Flashing, Rotating



Lens Material

PC



Base Material

ABS



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C

8 LED



LED Warning Light

Approval No.:
R65 XA1 E9 00.1867
R10 E9 10R 05/01 16099 00

SAE J845 JUN2013 (SAE W3)
Class 1 (Amber/Yellow)



WL431SK-ST

with magnet base



WL400SK-ST

with Ultrathin design 3 bolt Aluminium base



WL430SK-ST

Ultrathin design, Aluminium base,
with magnet base



WL401SK-ST-RG

with flexible DIN base



WL431SK-SM

with magnet base



WL400SK-SM

with Ultrathin design 3 bolt Aluminium base



WL430SK-SM

Ultrathin design, Aluminium base,
with magnet base



WL401SK-SM-RG

with flexible DIN base

DESCRIPTION



Input Voltage

DC12-24V



Light Source

0.5W LED , 45pcs



Function

Flashing, Rotating



Lens Material

PC



Base Material

ABS



Waterproof


IP65



Working Temperature

-30 °C ~ +60 °C

45 LED

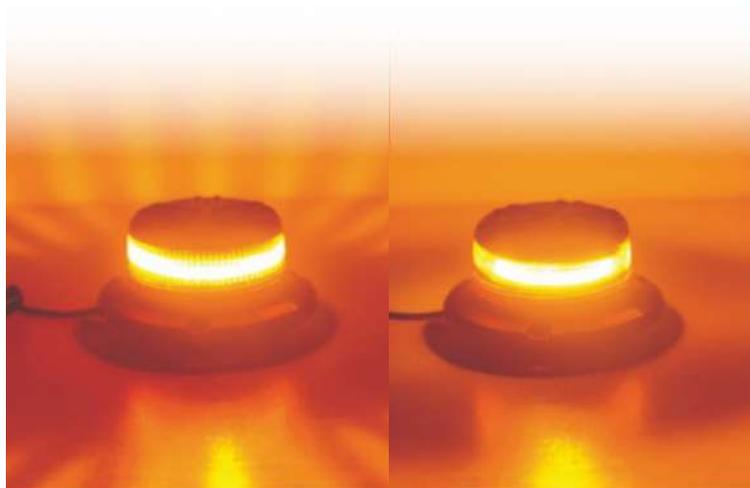

Four Color LED Warning Light



WL829

Description LED, Magnetic Base



WL830

Description XENON, Screw Base



Magnetic Base



Screw Base

DESCRIPTION



Input Voltage

DC12-24V



Light Source

LED/XENON



Function

36 Kind of Flashing Patterns



Lens Material

PC



Base Material

ABS



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C

3 LED



YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

LED Warning Light



WL701-LED-MC

Description LED, Magnetic Base



WL701-LED-SC

Description LED, Screw Base



WL700-LED-MC

Description LED, Magnetic Base



WL700-LED-SC

Description LED, Screw Base



Magnetic Base



Wire Outlet

DESCRIPTION



Input Voltage

DC12-24V



Light Source

LED



Function

Flashing



Lens Material

PC



Base Material

ABS



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C



YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

Warning Light



WL701-XENON-MC

Description XENON, Magnetic Base



WL701-XENON-SC

Description XENON, Screw Base



WL700-XENON-MC

Description XENON, Magnetic Base



WL700-XENON-SC

Description XENON, Screw Base



Magnetic Base



Wire Outlet

DESCRIPTION



Input Voltage

DC12-24V



Light Source

XENON



Function

Flashing



Lens Material

PC



Base Material

ABS



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C



Warning Light



WL270-LED



WL270-XENON

DESCRIPTION



Input Voltage

DC12-24V



Light Source

High power LED



Function

Single Flashing/Dual Flashing/Sextuple



Lens Material

PC



Base Material

ABS



Waterproof

IP65



Working Temperature

-30 °C ~ +60 °C

40 LED



YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

LED Warning Light

SAE
J845-JUN 2013



With screw base type

WL781



With magnet and cable

WL782



R10

LED



DESCRIPTION



Input Voltage
DC12-24V



Light Source
SMD5730.32PCS



Function
Rotating



Working Temperature
-30 °C ~ +60 °C



Lens Material
PC



Base Material
ABS



Waterproof
IP65

32 LED



YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

LED Warning Light

R65 Approval No.:
E9*65R00/10*6230*00



With screw base type

WL779



With magnet and cable

WL780



R10

LED



DESCRIPTION



Input Voltage
DC12-24V



Light Source
SMD5730.40PCS



Function
Rotating



Working Temperature
-30 °C ~ +60 °C



Lens Material
PC



Base Material
ABS



Waterproof
IP65

40 LED



YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

LED Warning Light



R10

LED



WL842

magnetic base



WL843

Wire Outlet

DESCRIPTION



Input Voltage
DC12-24V



Light Source
LED 3PCS



Function
Rotating



Working Temperature
-30 °C ~ +60 °C



Lens Material
PC



Base Material
Aluminium



Waterproof
IP65

3 LED




YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

Triangle With LED Warnlight System

Approval No.:
R10 -E9 10R 05 1853



Sensor Of Environment Lighting

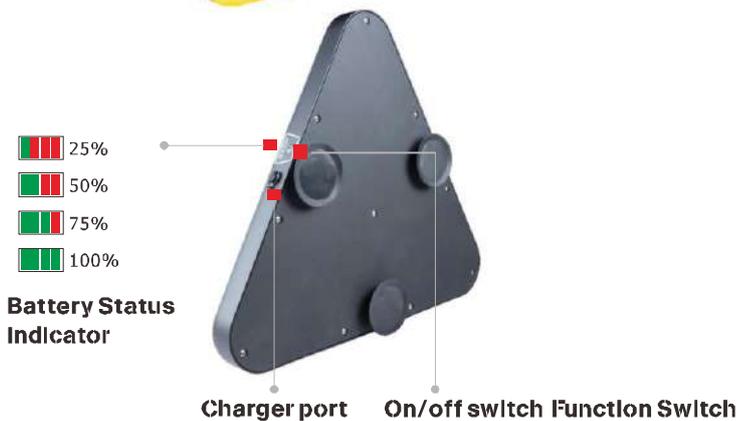


TS-02WB

DESCRIPTION

This product has LED light on both sides Symmetrically
Electric Raising increases the useful life of the triangle and makes it easy to use.

This option includes:

- *37 Pieces super bright ledØ70mm diameter LED lights of 12/24V
- *A corrosion-resistant aluminium casing to help protecting the triangle. It is delivered untreated or painted in your colours.
- *The system includes a 4.5m cable harness, control switch and mounting.



YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

Triangle With LED Warnlight System

Approval No.:
R10 -E9 10R 05 1853



R10

LED



Normal

TS-01



(Ø50mm / 24 LED)

Sensor Of Environment Lighting



3M Brand

TS-01B



(Ø50mm / 24 LED)

Sensor Of Environment Lighting




DESCRIPTION

This product has LED light on both sides Symmetrically
Electric Raising increases the useful life of the triangle and makes it easy to use.

This option includes:

- *37 Pieces super bright led Ø50mm diameter LED lights of 12/24V
- *A corrosion-resistant aluminium casing to help protecting the triangle. It is delivered untreated or painted in your colours.
- *The system includes a 4.5m cable harness, control switch and mounting.



YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

Triangle With LED Warnlight System

Approval No.:
R10 -E9 10R 05 1853



R10

LED



Normal

TS-02



(Ø70mm / 72 LED)

Sensor Of Environment Lighting



3M Brand

TS-02B



(Ø70mm / 72 LED)

Sensor Of Environment Lighting




DESCRIPTION

This product has LED light on both sides Symmetrically
Electric Raising increases the useful life of the triangle and makes it easy to use.

This option includes:

- *37 Pieces super bright ledØ70mm diameter LED lights of 12/24V
- *A corrosion-resistant aluminium casing to help protecting the triangle. It is delivered untreated or painted in your colours.
- *The system includes a 4.5m cable harness, control switch and mounting.



Triangle With LED Warnlight System

Approval No.:
R10 -E9 10R 05 1853



R10

LED



Nomal

TS-03



(Ø50mm/24 LED)

Sensor Of Environment Lighting



3M Brand

TS-03B



(Ø50mm/24 LED)


Sensor Of Environment Lighting



DESCRIPTION

This product has LED light on both sides Symmetrically
Electric Raising increases the useful life of the triangle and makes it easy to use.
This option includes:

- *37 Pieces super bright ledØ50mm diameter LED lights of 12/24V
- *A corrosion-resistant aluminium casing to help protecting the triangle. It is delivered untreated or painted in your colours.
- *The system includes a 4.5m cable harness, control switch and mounting.



YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

Triangle With LED Warnlight System

Approval No.:
R10 -E9 10R 05 1853



R10

LED



Nomal

TS-04



(Ø70mm / 72 LED)

Sensor Of Environment Lighting



3M Brand

TS-04B



(Ø70mm / 72 LED)


Sensor Of Environment Lighting



DESCRIPTION

This product has LED light on both sides Symmetrically
Electric Raising increases the useful life of the triangle and makes it easy to use.
This option includes:

- *37 Pieces super bright ledØ70mm diameter LED lighrs of 12/24V
- *A corrosion-resistant aluminium casing to help protecting the triangle.It is delivered untreated or painted in your colours.
- *The system includes a 4.5m cable harness, control switch and mounting.



YTK CO.,LTD.
[Http://www.ytk-group.co.jp](http://www.ytk-group.co.jp)

LED Warning Light



Input Voltage
DC12-24V



Light Source
0.5W Hight Power LED



Function
Rotating or Flashing



Lens Material
PC



Base Material
ABS



Waterproof
IP65



Working Temperature
-30 °C ~ +60 °C



12 LED + 5 LED



WL924-BO



WL924




WL924LP



WL923



WL923-A

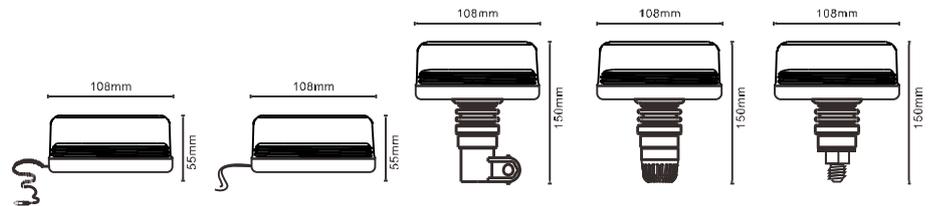

LED Warning Light



Input Voltage

DC12-24V



Light Source

High Power LED



Function

36 Kind of flashing patterns



Lens Material

PC



Base Material

ABS



Waterproof

IP65




Working Temperature

-30 °C ~ +60 °C



Lateral Light and Top Light Work Independently
With Synchronization function

12 LED + 5 LED



WL870

