


BL7084

Brushless DC Motor

Application : Electric Saw

用途：電鋸

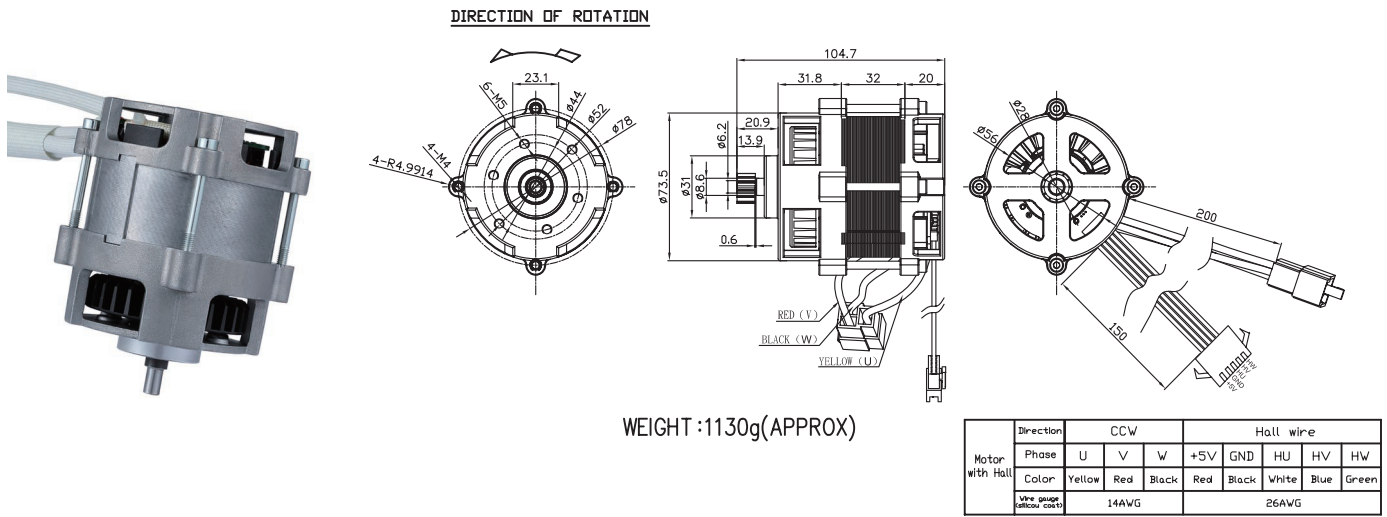

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL			
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	EFF	CURRENT	TORQUE	
			rpm	A	rpm	A	g-cm	mN-m	W	%	A	g-cm	mN-m
BL7084S-12V5.8K120W-B0X0N	12.0-48.0	12.0V CONSTANT	5800	1.65	4909	13.70	2507	245.78	126.38	83	106.82	22031	2159.90
BL7084S-40V16.4K1000W-B1X0N	12.0-48.0	40.0V CONSTANT	16400	3.20	13158	32.58	7632	748.24	1031.29	82	154.62	40101	3931.41

馬達的輸出長度及性能參數，EMC 對策可依客人要求做調整，詳情可詢問相關業務人員。
Please inquire your sales representative for output, performance and EMC solution.

