


IG-22CGM

05 & 06 TYPE



外形尺寸/ Appearance Size

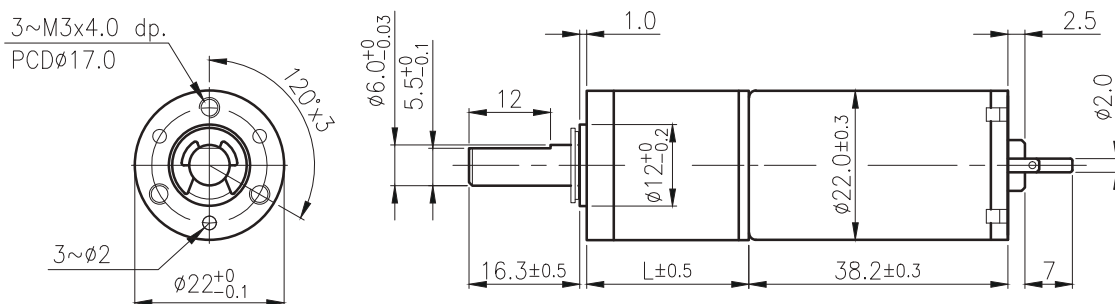

unit:mm

齒輪馬達轉矩 & 速度/ Geared Motor Torque & Speed

減速比 Reduction ratio	1/5	1/18	1/20	1/25	1/66	1/77	1/90	1/110	1/136	1/246	1/336	1/393	1/484	1/597	1/735	1/1079	1/1475	1/2124	1/3968
12V 定格扭力 Rated torque (g-cm)	260	850	1000	1200	2700	3200	3700	4000	4000	5000	5000	5000	5000	5000	5000	6000	6000	6000	6000
12V 定格轉數 Rated speed (rpm)	1500	400	340	280	105	92	79	64	52	29.4	22.4	19.6	16	12.9	10.5	7.4	5.5	4	2
24V 定格扭力 Rated torque (g-cm)	260	850	1000	1200	2700	3200	3700	4000	4000	5000	5000	5000	5000	5000	5000	6000	6000	6000	6000
24V 定格轉數 Rated speed (rpm)	1550	410	350	290	110	95	81	67	56	31	23	20	16.3	13.1	10.7	7.5	5.6	4	2
軸心迴轉方向 Rotation direction	CW																		
長度 Length (L)	23.3	29.5					35.7						41.9					48.1	

馬達單體型式/ Motor Data

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	70	7100	≤ 700	9000	≤ 190	5.1	51
24	70	7400	≤ 360	9000	≤ 120	5.3	51

馬達單體特性/ Motor Characteristics

