


BL48F23

Brushless DC Motor

Application : Power Tools
用途：電動工具

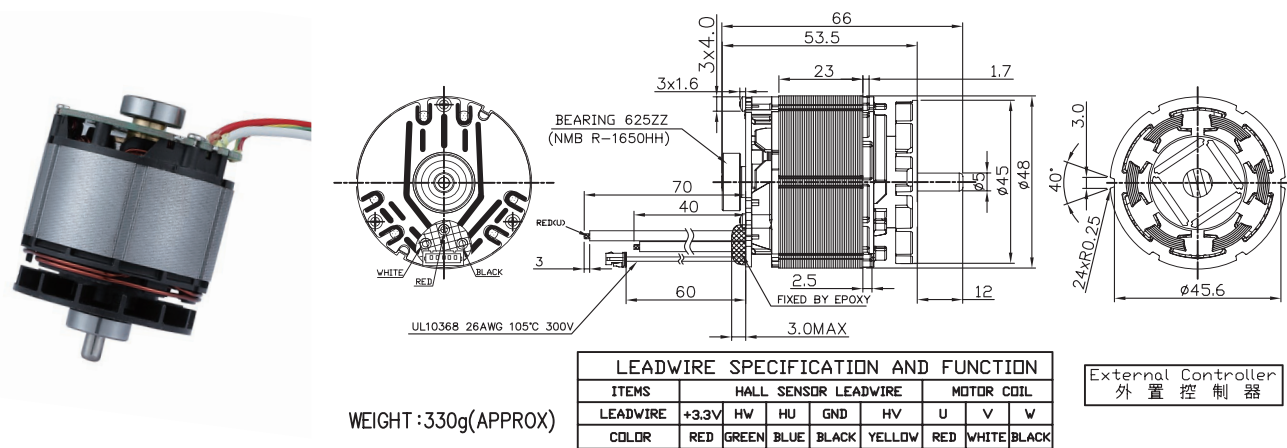

| MODEL | VOLTAGE | | NO LOAD | | AT MAXIMUM EFFICIENCY | | | | | STALL | | | |
|-----------------------------|-----------------|----------------|---------|---------|-----------------------|---------|--------|------|--------|-------|---------|--------|------|
| | OPERATING RANGE | NOMINAL | SPEED | CURRENT | SPEED | CURRENT | TORQUE | | OUTPUT | EFF | CURRENT | TORQUE | |
| | | | rpm | A | rpm | A | Kg-cm | N-m | W | % | A | Kg-cm | N-m |
| BL48F23S-14.4V24K400W-B1X0N | 14.4-21.6V | 14.4V CONSTANT | 24000 | 7.80 | 20243 | 41.37 | 2.01 | 0.20 | 417.44 | 72 | 218.85 | 12.91 | 1.27 |
| BL48F23S-18V23K450W-B1X0N | 14.4-21.6V | 18.0V CONSTANT | 23000 | 4.70 | 20450 | 33.50 | 2.16 | 0.21 | 453.84 | 76 | 210.75 | 15.75 | 1.54 |

馬達的出軸長度及性能參數，EMC 對策可依客人要求做調整，詳情可詢問相關業務人員。
Please inquire your sales representative for output, performance and EMC solution.

