


IG-22GM

01 & 02 TYPE



外形尺寸 / Appearance Size

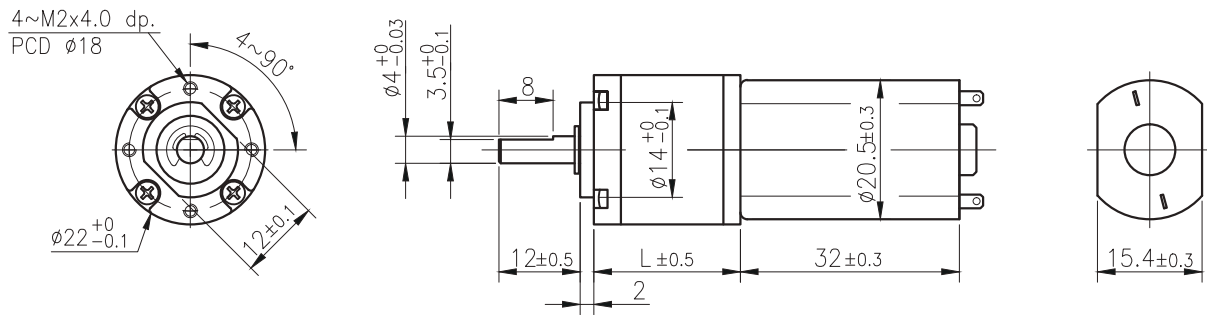

unit:mm

齒輪馬達轉矩 & 速度 / Geared Motor Torque & Speed

減速比 Reduction ratio	1/4	1/14	1/16	1/19	1/53	1/62	1/72	1/84	1/104	1/198	1/231	1/270	1/316	1/370	1/455	1/742	1/1014	1/1249	1/1621	1/1996
12V 定格扭力 Rated torque (g-cm)	77	215	250	295	695	810	950	1100	1370	2100	2500	2500	2500	2500	2500	3000	3000	3000	3000	3000
12V 定格轉數 Rated speed (rpm)	1450	470	405	348	127	109	93	79	64	34	29	25	22	19	15.5	9.5	7.4	6	4.6	3.8
24V 定格扭力 Rated torque (g-cm)	77	215	250	295	695	810	950	1100	1370	2100	2500	2500	2500	2500	2500	3000	3000	3000	3000	3000
24V 定格轉數 Rated speed (rpm)	1600	515	450	384	140	120	103	88	71	37	32	28	23.5	21	17.5	10.5	8	6.6	5	4.2
軸心迴轉方向 Rotation direction	CCW																			
長度 Length (L)	14.40	18.05				21.70						25.35						29		

馬達單體型式 / Motor Data

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	22	6700	≤ 200	8000	≤ 70	1.5	32
24	22	7400	≤ 110	9000	≤ 40	1.7	32

馬達單體特性 / Motor Characteristics

