


IG-28GM

03 & 04 TYPE



外形尺寸 / Appearance Size

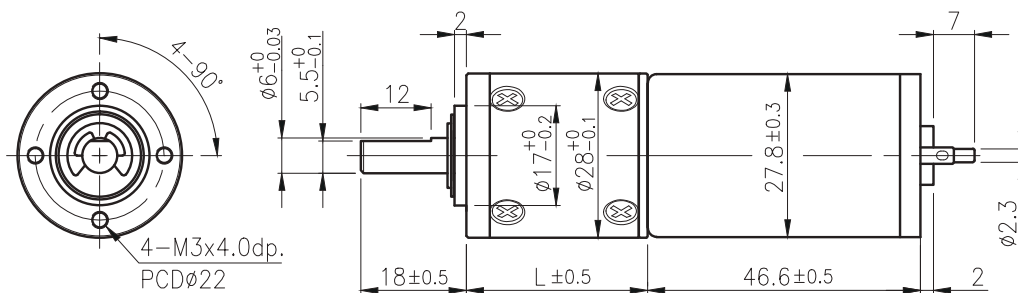

unit:mm

齒輪馬達轉矩 & 速度 / Geared Motor Torque & Speed

減速比 Reduction ratio	1/5	1/14	1/19	1/27	1/35	1/51	1/71	1/100	1/139	1/189	1/264	1/516	1/721	1/939
12V 定格扭力 Rated torque (Kg-cm)	0.32	0.75	1	1.4	1.9	2.4	3.3	4.7	6.6	7.4	10	10	10	10
12V 定格轉數 Rated speed (rpm)	1000	375	270	193	148	102	73	52	37.3	27.5	19.7	10.5	7.5	5.7
24V 定格扭力 Rated torque (Kg-cm)	0.38	0.9	1.2	1.7	2.3	2.8	4	5.6	7.8	8.8	10	10	10	10
24V 定格轉數 Rated speed (rpm)	990	370	265	191	147	101	72	51.5	36.9	27.2	19.3	10.4	7.4	5.7
軸心迴轉方向 Rotation direction	CCW													
長度 Length (L)	24.5		30.9				37.3				43.7			

馬達單體型式 / Motor Data

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	79	5200	≤ 500	6000	≤ 130	4.22	93
24	94	5140	≤ 300	6000	≤ 80	4.96	91

馬達單體特性 / Motor Characteristics

