


IG-36PGM

01 & 02 TYPE



外形尺寸/ Appearance Size

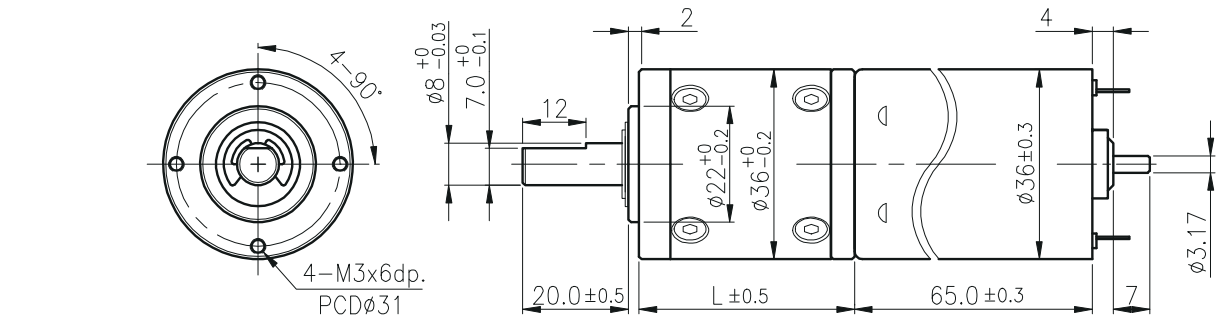

unit:mm

齒輪馬達轉矩 & 速度/ Geared Motor Torque & Speed

	減速比 Reduction ratio	1/5	1/14	1/19	1/27	1/51	1/71	1/100	1/139	1/189	1/264	1/516	1/721						
12V	定格扭力 Rated torque (Kg-cm)	1.1	2.5	3.6	5	8.2	11.5	16	20	25	25	30	30						
	定格轉數 Rated speed (rpm)	1250	475	340	243	129	92	66	47.2	34.8	25.1	13.2	9.5						
24V	定格扭力 Rated torque (Kg-cm)	1.1	2.7	3.8	5.3	8.7	12	17	20	25	25	30	30						
	定格轉數 Rated speed (rpm)	1240	470	335	240	127	91	65	46.5	34.3	24.8	13	9.4						
軸心迴轉方向 Rotation direction		CCW																	
長度 Length (L)		33.1		41.8			50.5				59.2								

馬達單體型式/ Motor Data

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	270	6570	≤ 2050	7500	≤ 300	18.23	222
24	285	6480	≤ 1050	7500	≤ 210	18.96	224

馬達單體特性/ Motor Characteristics

